
MS9924 (ASG)

FED SUP CLASS 5306

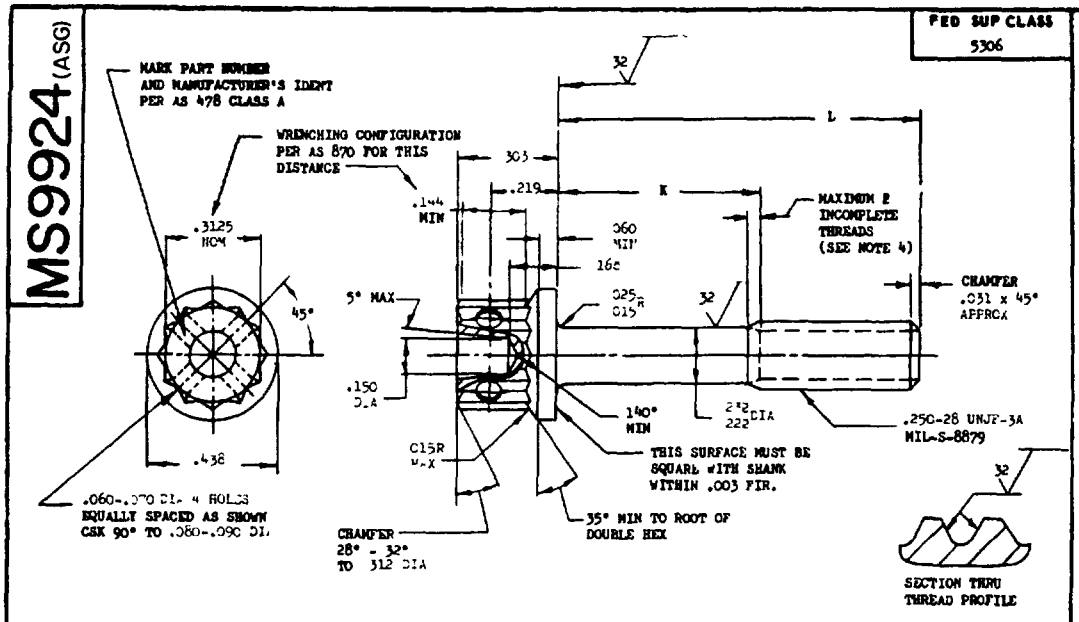

PART NO.	L	K	APPROX WEIGHT LB/100
MS9924-04	.375	.079- .099	1.20
MS9924-05	.438	.079- .099	1.27
MS9924-06	.500	.079- .099	1.34
MS9924-07	.562	.079- .099	1.41
MS9924-08	.625	.079- .099	1.48
MS9924-09	.688	.079- .099	1.55
MS9924-10	.750	.079- .099	1.63
MS9924-11	.812	.079- .099	1.70
MS9924-12	.875	.079- .125	1.77
MS9924-13	.938	.128- .188	1.84
MS9924-14	1.000	.190- .250	1.91
MS9924-15	1.062	.252- .312	1.98
MS9924-16	1.125	.315- .375	2.06
MS9924-17	1.188	.378- .438	2.13
MS9924-18	1.250	.440- .500	2.20
MS9924-19	1.312	.502- .562	2.27
MS9924-20	1.375	.565- .625	2.34
MS9924-21	1.438	.628- .688	2.41
MS9924-22	1.500	.690- .750	2.48
MS9924-23	1.562	.752- .812	2.55
MS9924-24	1.625	.815- .875	2.63
MS9924-25	1.688	.878- .938	2.70
MS9924-26	1.750	.940-1.000	2.77
MS9924-27	1.812	1.002-1.062	2.84
MS9924-28	1.875	1.065-1.125	2.91
MS9924-29	1.938	1.128-1.188	2.98
MS9924-30	2.000	1.190-1.250	3.05
MS9924-31	2.125	1.315-1.375	3.20
MS9924-32	2.250	1.440-1.500	3.34
MS9924-33	2.375	1.565-1.625	3.48
MS9924-34	2.500	1.690-1.750	3.63
MS9924-35	2.625	1.815-1.875	3.77
MS9924-36	2.750	1.940-2.000	3.91
MS9924-37	2.875	2.065-2.125	4.05
MS9924-38	3.000	2.190-2.250	4.19
MS9924-39	3.125	2.315-2.375	4.34
MS9924-40	3.250	2.440-2.500	4.48
MS9924-41	3.375	2.565-2.625	4.63
MS9924-42	3.500	2.690-2.750	4.77
MS9924-43	3.625	2.815-2.875	4.91
MS9924-44	3.750	2.940-3.000	5.06
MS9924-45	3.875	3.065-3.125	5.20
MS9924-46	4.000	3.190-3.250	5.34
MS9924-47	4.125	3.315-3.375	5.49
MS9924-48	4.250	3.440-3.500	5.63
MS9924-49	4.375	3.565-3.625	5.77
MS9924-50	4.500	3.690-3.750	5.92
MS9924-51	4.625	3.815-3.875	6.07
MS9924-52	4.750	3.940-4.000	6.21
MS9924-53	4.875	4.065-4.125	6.34
MS9924-54	5.000	4.190-4.250	6.48
MS9924-55	5.125	4.315-4.375	6.63
MS9924-56	5.250	4.440-4.500	6.77
MS9924-57	5.375	4.565-4.625	6.91
MS9924-58	5.500	4.690-4.750	7.06
MS9924-59	5.625	4.815-4.875	7.20
MS9924-60	5.750	4.940-5.000	7.34
MS9924-61	5.875	5.065-5.125	7.48
MS9924-62	6.000	5.190-5.250	7.63

1. SHANK SHALL BE STRAIGHT WITHIN .003 PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .007 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET
5. MATERIAL STEEL AMS 6322.
6. HARDNESS: ROCKWELL C26-32.
7. FINISH CADMIUM PLATE AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING
8. MANUFACTURING SPECIFICATION AMS 7452 EXCEPT HEAD SHALL BE UPSET
9. HEAD TO SHANK FILLET SHALL BE COLD WORKED
10. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING
11. SURFACE TEXTURE USAS B46.1-1962 UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD
12. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED
13. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES AS OF DIMENSIONING & DIC, ANGULAR DIMENSIONS ±5°.
14. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS
THIS STANDARD WAS DEVELOPED UNDER THE [illegible] DISCIPLINE

Review activities: USAF - 84, 85

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

APPROVED 15 Aug 69 REVISED

P.A. USAF - 11 Other Cust Navy - AS	TITLE	MILITARY STANDARD MS9924 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination)
ASD use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U.S. GOVERNMENT PRINTING OFFICE: 1969 O-353-065 5-1793

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:28Z
Check the source to verify that this is the current version before use.