MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, SCHOTTKY TTL,
576 BIT RANDOM ACCESS MEMORY (RAM),
MONOLITHIC SILICON

This specification is approved for use by Rome Air Development Center, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, Schottky TTL, static 576 bit random access memory microcircuits. Three product assurance classes and a choice of case outline/lead finish are provided and are reflected in the complete part number.

1.2 Part number. The part number shall be in accordance with MIL-M-38510.

1.2.1 Device type. The device type shall be as follows:

Device type	Circuit
01	64x9 bit RAM, uncommitted to collector

1.2.2 Device class. Device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outline. The case outline shall be designated as follows:

Letter	Case outline (see MIL-M-38510, appendix C)
X	See figure 1B (28-lead, 1 7/16" x 1/2" dual-in-line pack)
Y	See figure 1C (28-lead, 3/8" x 9/16" flat-pack)
Z	See figure 1A (28-terminal, .45" x .45" chip carrier)

1.3 Absolute maximum ratings.

Supply voltage range	-0.5 to 7.0 Vdc
Input voltage range	-0.5 to +5.5 Vdc
Storage temperature range	-65° to +150°C
Maximum power dissipation, P_D	
Device type 01	935 mW 1/
Voltage applied to outputs (output high)	-0.5 to +5.5 Vdc
Output current (output low)	+20 mA
Input current	-12 to +5.0 mA
Lead temperature (soldering 10 seconds)	300°C
Thermal resistance, junction to case	θ_{JC} = 24°C/W for flat pack; 16°C/W for dual-in-line pack
Junction temperature	T_J = 175°C

1.4 Recommended operating conditions.

Supply voltage	4.5 Vdc minimum to 5.5 Vdc maximum
Minimum high level input voltage	2.4 Vdc
Maximum low level input voltage	0.4 Vdc
Case operating temperature range	-55° to 125°C

1/ Must withstand the added P_D due to short circuit condition (e.g., I_{OS}) test.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Rome Air Development Center, RADC (RBE-2), Griffiss AFB, NY 13440, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Detail specifications. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510, and herein.

3.2.1 Terminal connections. The terminal connections shall be as specified on figure 2.

3.2.2 Truth tables. The truth tables shall be as specified on figure 3.

3.2.3 Logic diagram. The logic diagram shall be as specified on figure 4.

3.2.4 Schematic circuit. The schematic circuit shall be as specified on figure 5.

3.2.5 Case outlines. The case outlines shall be as specified in 1.2.3.

3.2.6 Functional tests. The functional tests used to test these devices are contained in table III. If the test patterns cannot be implemented due to test equipment limitations, then alternate patterns to accomplish the same results shall be submitted to the qualifying activity for approval.

3.3 Lead material and finish. Lead material and finish shall be in accordance with MIL-M-38510 (see 6.5).

3.4 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended ambient operating temperature range, unless otherwise specified.

3.5 Electrical test requirements. Electrical test requirements shall be as specified in table II. The subgroups of table III which constitute the minimum electrical test requirements for screening, qualification, and quality conformance by device class are specified in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions	Limits Min	Limits Max	Unit
Output low voltage	V_{OL}	V_{CC} = 4.5 V; I_{OL} = 12 mA	---	0.5	V
High-level input current	I_{IH}	V_{CC} = 5.5 V; V_{IN} = 5.5 V	---	40	µA
Output leakage current	I_{CEX}	V_{CC} = 5.5 V; V_{OH} = 4.5 V	---	100	µA
Low-level input current	I_{IL}	V_{CC} = 5.5 V; V_{IN} = 0.4 V	---	-400	µA
Input diode clamp voltage	V_{IC}	V_{CC} = 5.5 V; I_{IN} = -10 mA	---	-1.5	V
Supply current	I_{CC}	V_{CC} = 5.5 V; T_C=25°C; 125°C 2/	---	155	mA
		V_{CC} = 5.5 V; T_C= -55°C 2/	---	170	mA
Address access time	TACQV	V_{DD} = 4.5 and 5.5 V; C_L = 30 pF (see figure 7)	---	60	ns
Chip select time	TSLQV		---	40	ns
Chip select recovery time	TSHQH		---	40	ns
Write recovery time	TWHQV		---	55	ns
Write disable time	TWLQV		---	45	ns
Write pulse width	TWLWH		45	---	ns
Data setup time prior to write	TDCWL		5	---	ns
Data hold time after write	TWHDC		5	---	ns
Address setup time prior to write	TACWL		10	---	ns
Address hold time after write	TWHAC		5	---	ns
Chip select setup time prior to write	TSLWL		5	---	ns
Chip select hold time after write	TWHSH		5	---	ns

1/ Complete terminal conditions shall be specified in table III.

2/ I_{CC} measured with all inputs and outputs grounded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (see table III)		
	Class S devices	Class B devices	Class C devices
Interim electrical parameters (pre burn-in) (method 5004)	1	1	None
Final electrical test parameters (method 5004)	1*,2,3,7,9, 10, 11	1*,2,3,7,9	1, 7
Group A test requirements (method 5005)	1,2,3,7,8,9, 10,11	1,2,3,7,9, 10,11	1,2,3,7,9
Group B end-point electrical parameters (method 5005)	1,2,3,7,8,9, 10,11	None	None
Group C end-point electrical parameters (method 5005)	N/A	1,2,3	1
Additional electrical subgroups for group C period inspection	None	None	10,11
Group D end-point electrical parameters (method 5005)	1,2,3	1,2,3	1

*PDA applies to subgroup 1 (see 4.3c.).

3.7 Marking. Marking shall be in accordance with MIL-M-38510. At the option of the manufacturer, the country of origin may be omitted from the body of the microcircuit, but shall be retained on the initial container.

3.8 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 13 (see MIL-M-38510, appendix E).

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510 and methods 5005 and 5007 as applicable, of MIL-STD-883, except as modified herein.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.3 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to qualification and quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test (method 1015 of MIL-STD-883).
   1. Test condition D or E, using the circuit shown on figure 6, or equivalent.
   2. T_A = 125°C minimum.

b. Interim and final electrical test parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.

c. Percent defective allowable (PDA) - The PDA for class S devices shall be as specified in MIL-M-38510. The PDA for class B devices shall be 10 percent based on failures from group A, subgroup 1 test after cooldown as final electrical test in accordance with method 5004 of MIL-STD-883, and with no intervening electrical measurements. If interim electrical parameter tests are performed prior to burn-in, failures resulting from pre burn-in screening may be excluded from the PDA. If interim electrical parameter tests prior to burn-in are omitted, then all screening failures shall be included in the PDA. The verified failures of group A, subgroup 1, after burn-in divided by the total number of devices submitted for burn-in in that lot shall be used to determine the percent defective for that lot, and the lot shall be accepted or rejected based on the PDA for the applicable device class.

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Tests shall be as specified in table II.
b. Subgroups 4, 5, and 6 of table I of method 5005 of MIL-STD-883 shall be omitted.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883.

a. Class S steady-state life (accelerated) test circuits shall be submitted to the qualifying activity for approval. When the alternate steady-state life test is used, the circuit on figure 6 shall be used.
b. End-point electrical parameters shall be as specified in table II herein.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table II herein.
b. Subgroups 3 and 4 shall be added to the group C inspection requirements for class C devices and shall consist of the tests, conditions, and limits specified for subgroups 10 and 11 of group A.
c. Steady-state life-test (method 1005 of MIL-STD-883) conditions:
   1. Test condition D or E, using the circuit shown on figure 6, or equivalent.
   2. T_A = 125°C, minimum.
   3. Test duration: 1,000 hours, except as permitted by appendix B of MIL-M-38510 and method 1005 of MIL-STD-883.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883, and end-point electrical parameters shall be as specified in table II herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as specified herein.

4.5.1 Voltage and current. All voltages given are referenced to the microcircuit ground terminal. Currents given are conventional current and positive when flowing into the referenced terminal.

4.6 Inspection of packaging. Inspection of packaging shall be in accordance with MIL-M-38510.

5. PACKAGING


5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Notes. The notes specified in MIL-M-38510 are applicable to this specification.

6.2 Intended use. Microcircuits comforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.

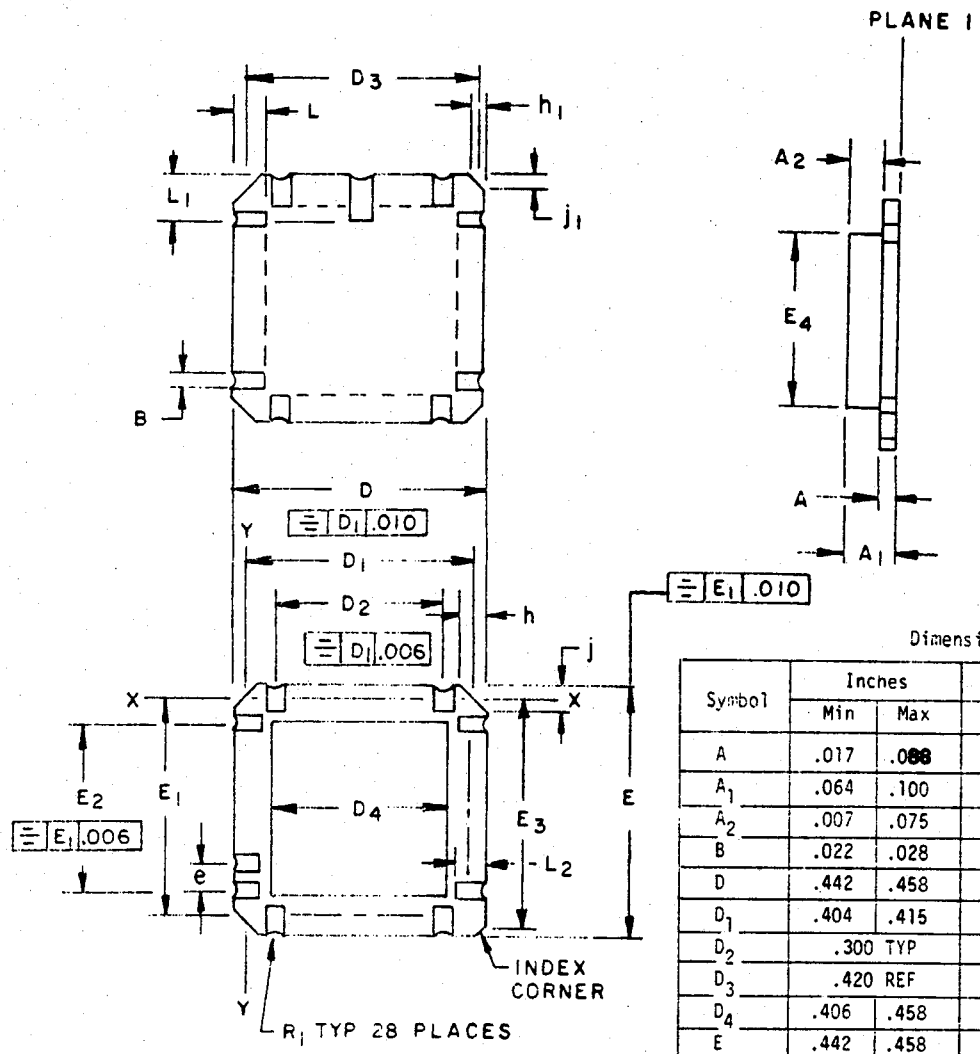


Dimensions

Symbol	Inches		Millimeters		Notes
	Min	Max	Min	Max	
A	.017	.088	.43	1.68	
A_1	.064	.100	1.63	2.54	5
A_2	.007	.075	.18	1.90	
B	.022	.028	.56	.71	3
D	.442	.458	11.23	11.63	6
D_1	.404	.415	10.26	10.54	
D_2	.300 TYP		7.62 TYP		
D_3	.420 REF		10.67 REF		
D_4	.406	.458	10.31	10.54	
E	.442	.458	11.23	11.63	6
E_1	.404	.415	10.26	10.54	
E_2	.300 TYP		7.62 TYP		
E_3	.420 REF		10.67 REF		
E_4	.406	.458	10.31	11.63	
e	.050 BSC		1.27 BSC		
h	.040 BSC		1.02 BSC		
h_1	.010	.020	.25	.51	
j	.040 BSC		1.02 BSC		
j_1	.010	.020	.25	.51	
L	.045	.055	1.14	1.40	2
L_1	.077	.093	1.96	2.36	4
R_1	.007	.011	.18	.28	1

NOTES:
1. Metallized castellations connected to plane 1 terminals.
2. Relief on corner terminal maximum dimension permissible.
3. Electrical connection is required on plane 1. Metallization is optional on plane 2. However, if plane 2 is metallized it shall be electrically connected.
4. Features for electrical/optical orientation or handling purposes must be within the area shown.
5. Dimension A_1 controls the overall package thickness.
6. Multilayer implementation of this package may have an overall material protusion of .010 inch (.25 mm) maximum above the maximum dimension shown, not to exceed .005 inch (.13 mm) maximum per side.

FIGURE 1A. Case outline Z (28 terminal, .45" x .45" chip carrier).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.

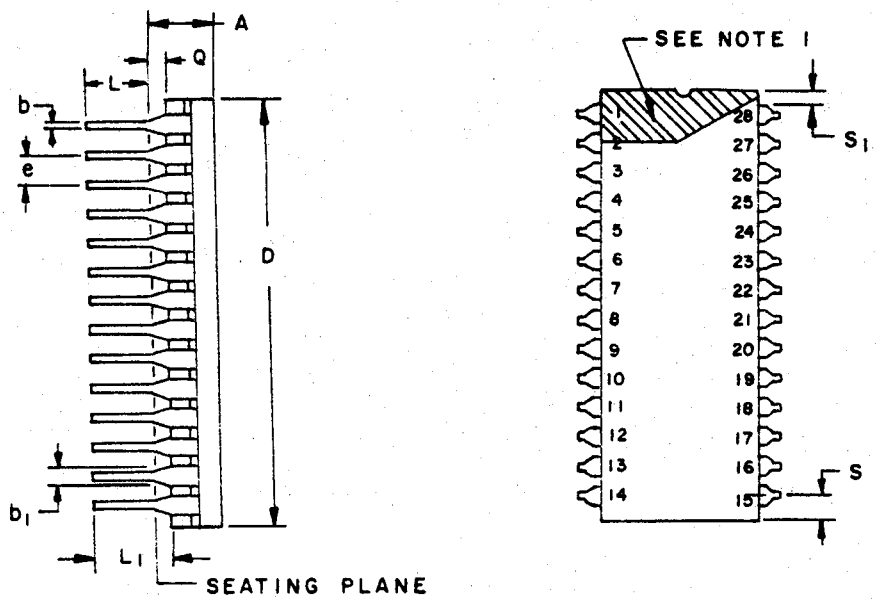


Dimensions

Symbol	Inches		Millimeters		Notes
	Min	Max	Min	Max	
A	.175	.200	4.44	5.08	
b	.016	.020	.41	.51	8
b_1	.050	.060	1.27	1.52	2,8
c	.009	.011	.23	.28	8
D	1.435	1.465	36.45	37.21	4
E	.514	.526	13.06	13.36	4
E_1	---	.600	---	15.24	7
e	.090	.110	2.29	2.79	5,9
L	.145	.165	3.68	4.19	
L_1	.185	.205	4.70	5.21	
Q	.035	.046	.89	1.17	3
S	---	.098	---	2.49	6
S_1	.005	---	.13	---	6
α	10° TYP		10° TYP		

NOTES:
1. Index area; a notch or a pin one identification mark shall be located adjacent to pin one and shall be located within the shaded area shown. The manufacturer's identification shall not be used as a pin one identification mark.
2. The minimum limit for dimension b_1 may be .023 inch (.59 mm) for leads number 1, 14, 15 and 28 only.
3. Dimension Q shall be measured from the seating plane to the base plans.
4. This dimension allows for off-center lid, meniscus and glass overrun.
5. The basic pin spacing is .100 inch (2.54 mm) between centerlines. Each pin centerline shall be located within ±.010 (.25 mm) of its exact logitudinal position relative to pins 1 and 28.
6. Applies to all four corners (leads number 1, 14, 15 and 28), and 40.5 shall apply.
7. Lead center when α is 0°. E_1 shall be measured at the centerline of the leads (see 40.4 of this appendix).
8. All leads - Increase maximum limit by .003 (.08 mm) measured at the center of the flat, when lead finish A is applied.
9. Twenty-six spaces.

FIGURE 1B. Case outline X (28 lead dip - 1-7/16" x 1/2").

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.

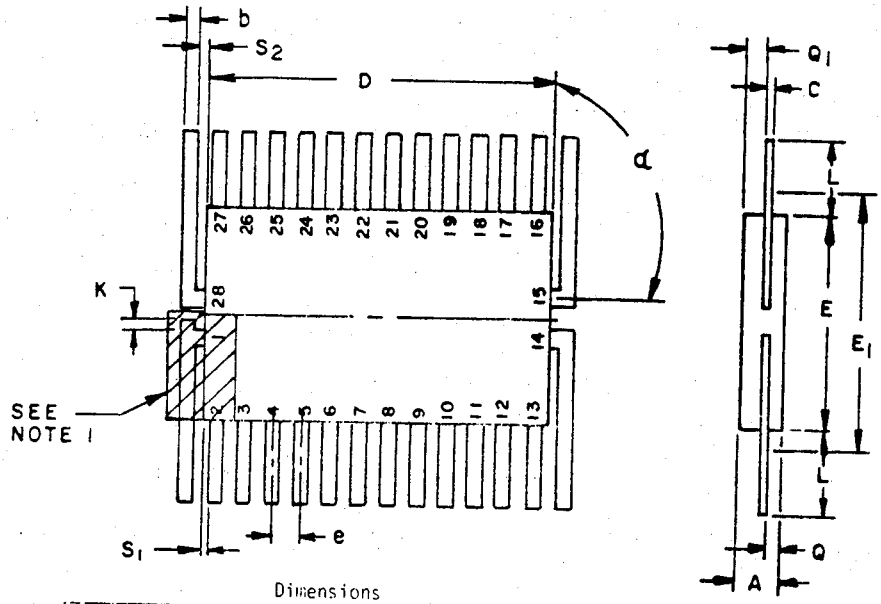

Dimensions

Symbol	Inches		Millimeters		Notes
	Min	Max	Min	Max	
A	.074	.089	1.88	2.26	
b	.016	.018	.41	.46	5
c	.005 REF		.13 REF		5
D	.590	.600	14.99	15.24	3
E	.365	.375	9.27	9.52	
E_1	---	.395	---	10.03	3
e	.050 BSC		1.27 BSC		4,6
k	.015 TYP		.38 TYP		9
L	---	.340	---	8.64	
Q	.030	.040	.76	1.02	2
S	---	.045	---	1.14	7
S_1	.005	---	.13	---	8
S_2	.004	---	.10	---	10
α	30°	90°	30°	90°	11


NOTES:
1. Index area; a notch or a pin one identification mark shall be located adjacent to pin one and shall be located within the shaded area shown. The manufacturer's identification shall not be used as a pin one identification mark. Alternatively, a tab (dimension k) may be used to identify pin one.
2. Dimension Q shall be measured at the point of exit of the lead from the body. Dimension Q shall be .0085 (.216 mm) minimum when lead finish A is applied.
3. This dimension allows for off-center lid, meniscus and glass overrun.
4. The basic pin spacing is .050 (1.27 mm) between centerlines. Each pin centerline shall be located within ±.005 (.13 mm) of its exact longitudinal position relative to pins 1 and 28.
5. All leads - Increase maximum limit by .003 (.08 mm) measured at the center of the flat, when lead finish A is applied.
6. Twenty-six spaces.
7. Applies to all four corners (leads number 2, 13, 16 and 27).
8. Dimension S_1 (see 40.3) may be .000 (.00 mm) if leads number 2, 13, 16 and 27 bend toward the cavity of the package within one leads width from the point of entry of the lead into the body except that 40.5 shall apply for bottom or side brazed lead configurations.
9. Optional, see note 1. If a pin one identification mark is used in addition to this tab, the minimum limit of dimension k does not apply.
10. Applies to leads number 1, 14, 15, and 28.
11. Lead configuration is optional within dimension E except dimensions b and c apply

FIGURE 1C. Case outline Y (28 lead flat pack - 3/8" x 9/16").

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.

Device type 01

Cases X and Y

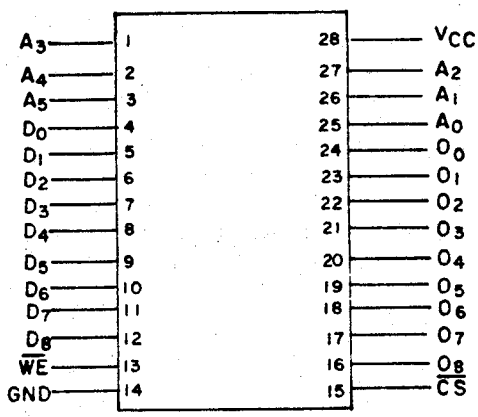

Device type 01

Case Z

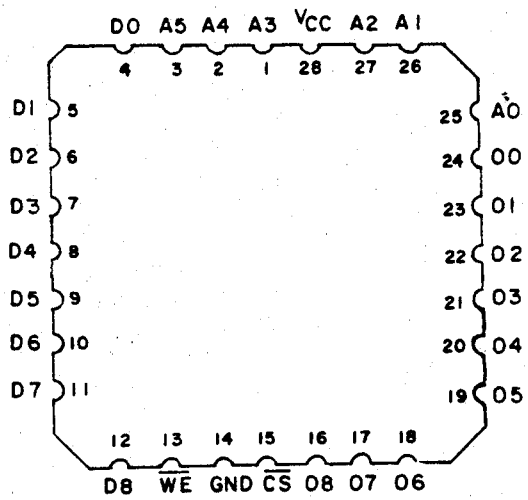


FIGURE 2. Terminal connections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.

Device type 01

INPUTS			OUTPUT	MODE
$\overline{CS}$	$\overline{WE}$	D_{IN}	Open Collector	
H	X	X	H	NOT SELECTED
L	L	L	H	WRITE "0"*
L	L	H	H	WRITE "1"*
L	H	X	$\overline{D_{OUT}}$*	READ

H = HIGH Voltage level
L = LOW Voltage level
X = Don't care (HIGH or LOW)
*Memory inverts from Data in to Data Output

FIGURE 3. Truth table.

Device type 01

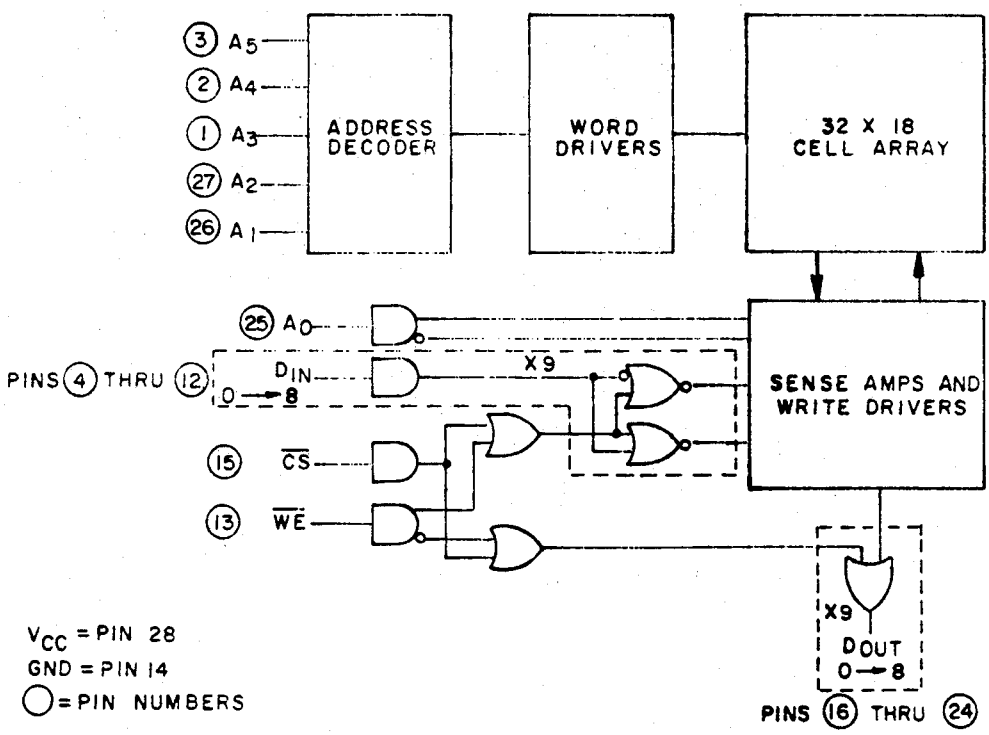


FIGURE 4. Logic diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.

Device type 01


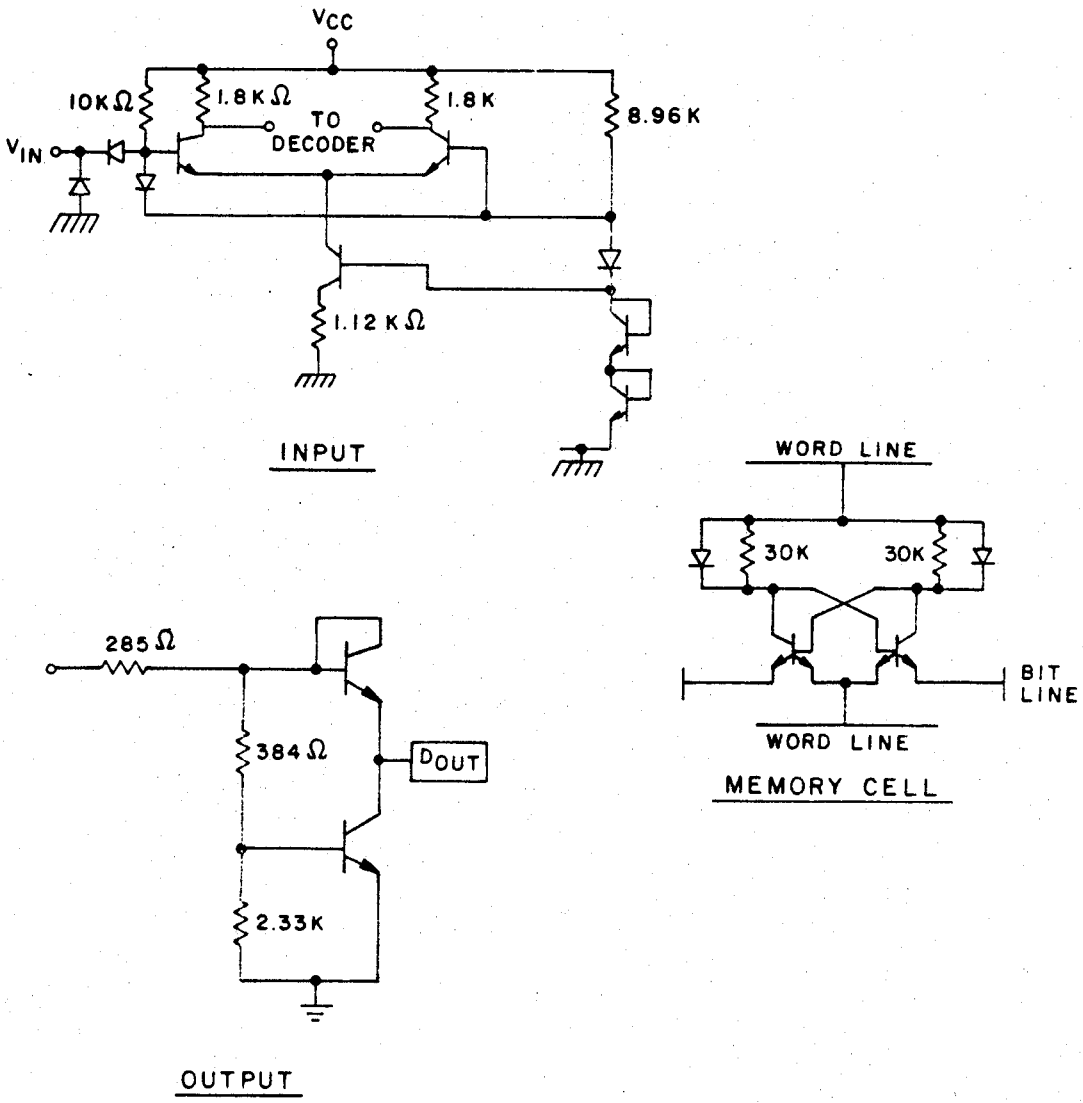


FIGURE 5. Schematic diagrams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.

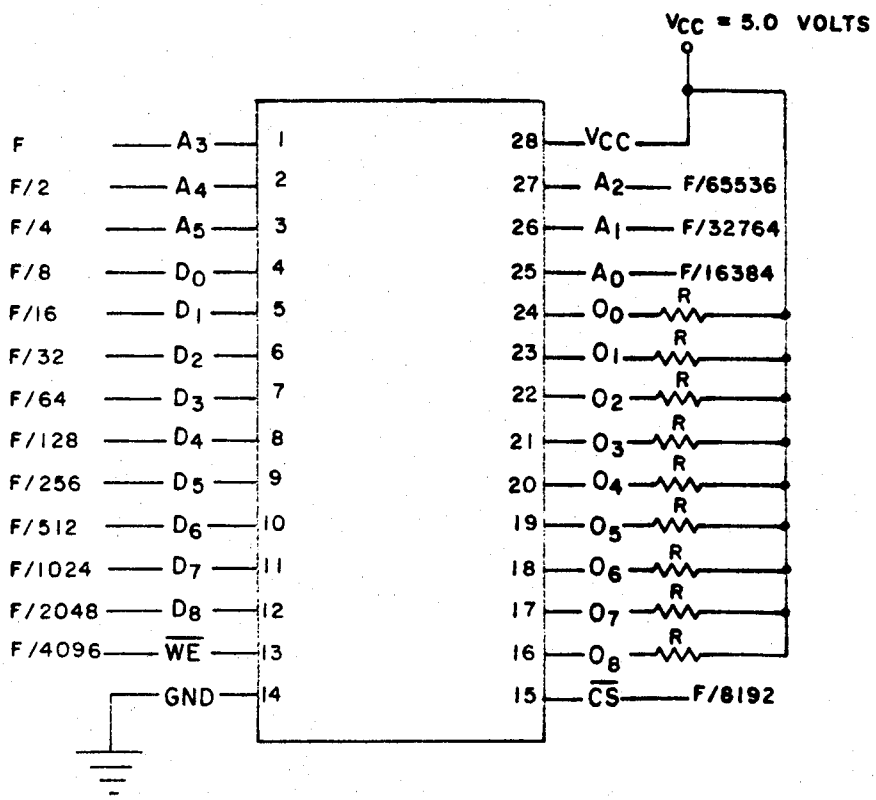

NOTES:
1. All resistances equal to 400Ω ±5%.
2. V_{CC} shall be high enough to insure that 5.0 V minimum is present at V_{CC} device terminal.
3. All pulse generators have the following characteristics: $V_{IH} \geq 3.0$ V, $V_{IL} \leq 0.4$ V, duty cycle = 50 ±15% and F = 100 kHz minimum.

FIGURE 6. Burn-in and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.

Device type 01

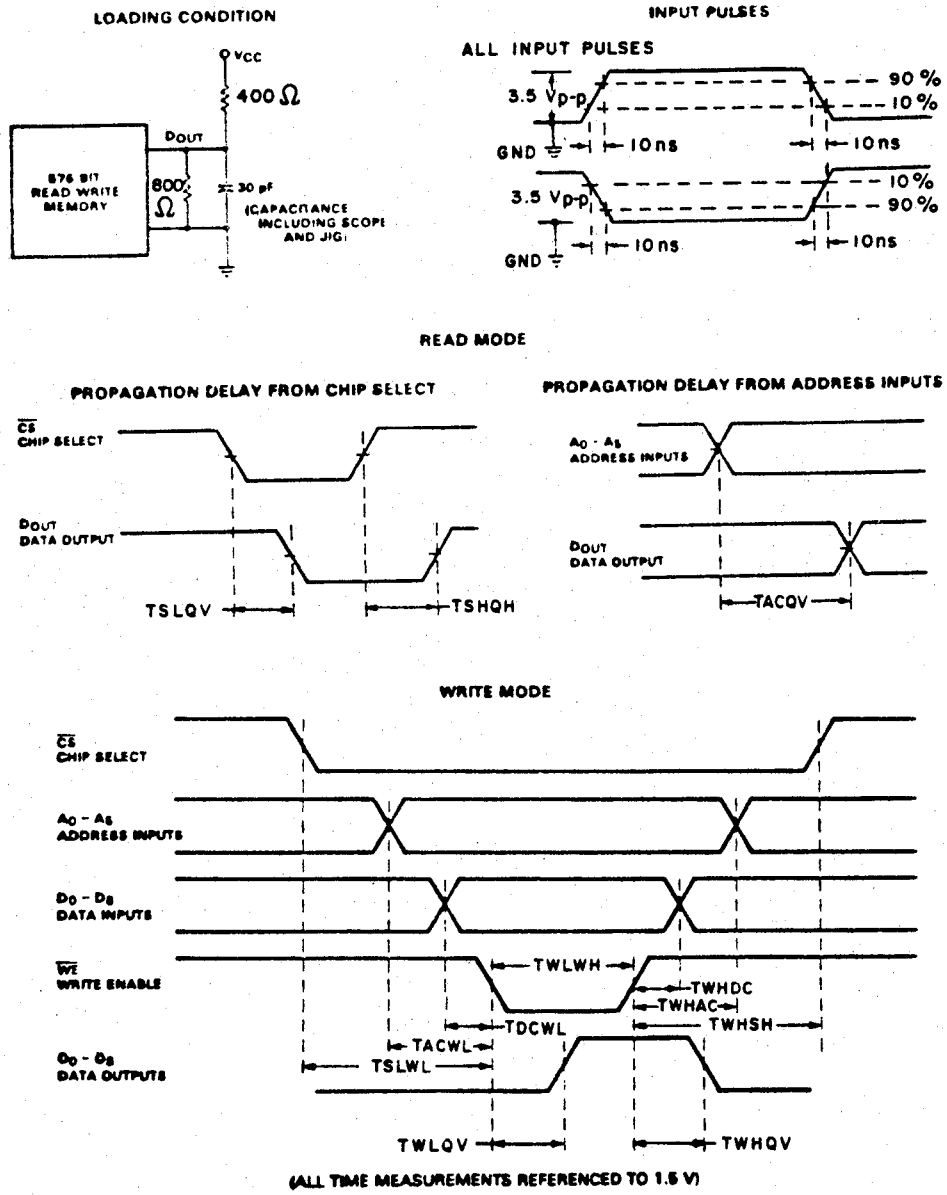


FIGURE 7. Switching time load circuits, test conditions and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-M-38510/232, dated 30 Sep 1980 does not include foldout pages 14 thru 17. Please call the ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.

6.3 Ordering data. The contract or purchase order should specify the following:

a. Complete part number (see 1.2).
b. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.
c. Requirements for certificate of compliance, if applicable.
d. Requirements for notification of change of product or process to procuring activity in addition to notifying qualifying activity, if applicable.
e. Requirements for packaging and packing.
f. Requirements for failure analysis (including required test condition of method 5003 of MIL-STD-883) corrective action and reporting of results, if applicable.
g. Requirements for quality assurance options.
h. Requirements for special carriers, lead lengths, or lead forming, if applicable. These requirements shall not affect the part number. Unless otherwise specified, these requrements will not apply to direct purchase by or direct shipment to the Government.
i. Requirement for "JAN" marking.

6.4 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-M-38510, MIL-STD-1331, and as follows:

GND	Electrical ground (common terminal).
V_{IN}	Voltage level at an input terminal.
V_{IC}	Input clamp voltage.
I_{OHZ}	High impedance (off-state) output high current.
I_{OLZ}	High impedance (off-state) output low current.
TACQV	Address access time.
TSLQV	Chip select time.
TWLWH	Write pulse width.
TSHQX	Chip select recovery time.
TWHAC	Address hold time after write.
TWHDC	Data hold time after write.
TWHSH	Chip select hold time after write.
TWHQV	Write recovery time.
TWLQV	Write disable time.
TACWL	Address setup time prior to write.
TSLWL	Chip select setup time prior to write.
TDCWL	Data setup time prior to write.

6.5 Logistic support. Lead materials and finishes (see 3.3), are interchangeable. Unless otherwise specified, microcircuits procured for Government logistic support will be procured to device class B (see 1.2.2), lead finish C (see 3.3). Longer length leads and lead forming will not affect the part number.

6.6 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information shall not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-M-38510.

Military device type	Generic-industry type
01	93419

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.

Custodian:
Air Force - 17

Review activities:
Air Force - 11, 19, 85, 99
DLA - ES

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5962-F486)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE [redacted] AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Rome Air Development Center
ATTN: RBE-2
Griffiss AFB, NY 13441

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:55Z
Check the source to verify that this is the current version before use.