
MIL-A-25708/2A(USAF)
7 November 1972
SUPERSEDING
MIL-A-25708/2(USAF)
29 February 1972

MILITARY SPECIFICATION SHEET

ANTENNA, BLADE, AS-2685/A

The complete requirement for procuring the antenna described herein shall consist of this document and the latest issue of Specification MIL-A-25708

This Specification is **approved** for use by Departments of the Air Force

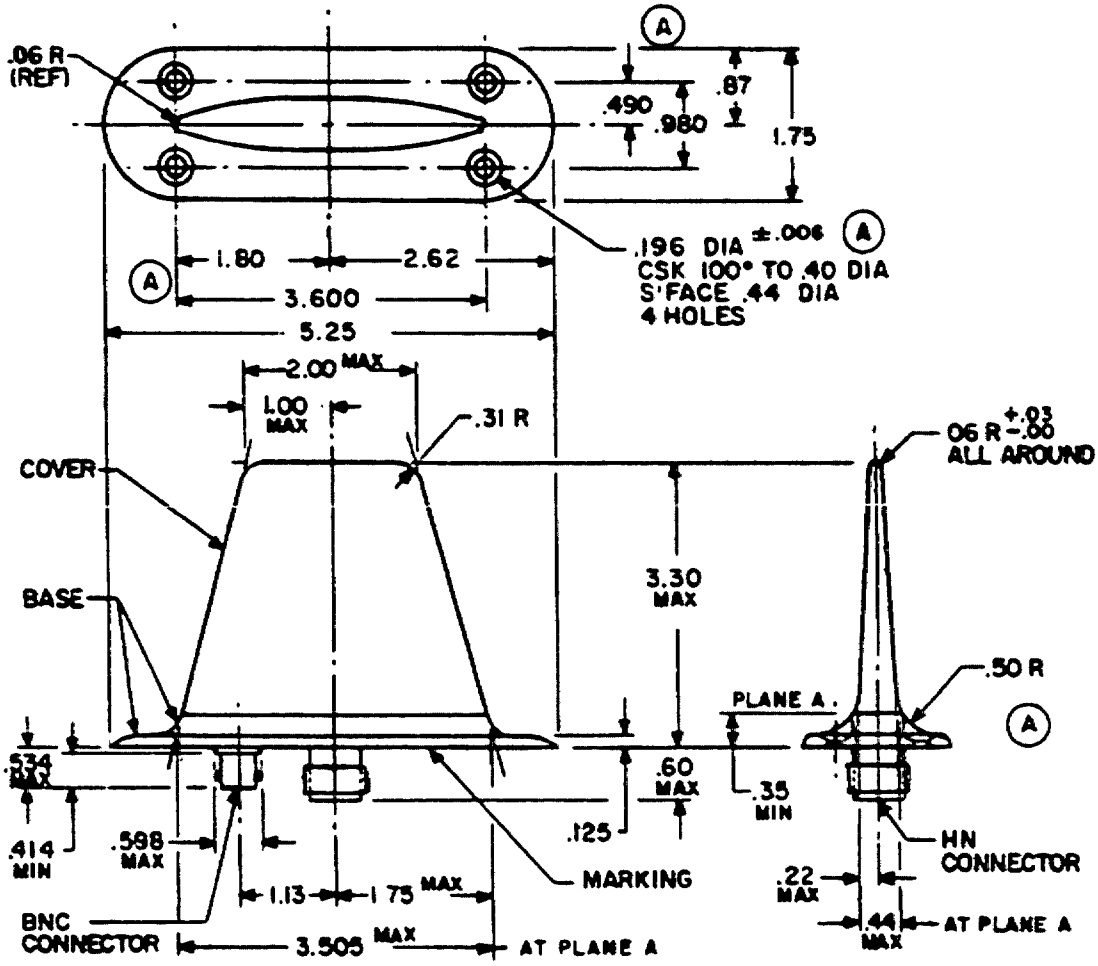

NOTES:
1. DIMENSIONS ARE IN INCHES.
2. UNLESS OTHERWISE SPECIFIED TOLERANCE ON TWO PLACE DECIMALS ±.01 ON THREE PLACE DECIMALS ±.005

(A) Denotes revision

FIGURE 1

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:07Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	.03	.35	8.89	.60	15.24	2.00	50.80
.005	.13	.38	9.65	.62	15.76	2.62	66.55
.01	.25	.40	10.16	.625	15.88	3.30	83.82
.03	.76	.414	10.52	.87	22.10	3.505	89.03
.06	1.52	.44	11.18	1.000	25.40	3.625	92.08
.125	3.18	.500	12.70	1.13	28.70	5.25	133.35
.22	5.59	.534	13.56	1.75	44.45		
.31	7.87	.598	15.19	1.81	45.97		

Requirements:

Dimension & Construction: See Figure 1
Base: Aluminum Alloy per QQ-A-591, Alloy 380
Cover: Metal or other suitable material
Temperature Operating Range: -55° to 250°C
Side Loading: 10.5 PSIG (100 lbs)
Frequency: 960 to 1220 MHz
Impedance: 50 ohms nominal
VSWR of Antenna: 960 to 1220 MHz 1.4:1
1000 to 1100 MHz 1.3:1
VSWR of Sampling Probe: 960 to 1220 MHz 1.5:1
Power: 4 KW peak, 100 watts avg
Weight: 8 ounces
Part Number: M25708/2-02
Data List: A data list shall accompany each antenna with VSWR measurements Values made at 960, 1100 and 1200 MHz.
Intended for use on F-4 aircraft.

Custodian:
Air Force 80

Review Activities:
Air Force 11, 84

User Activities:
Air Force

Preparing Activity:
Air Force 80

(Project 5985-F392-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:07Z
Check the source to verify that this is the current version before use.