MIL-A-25708/3B
17 OCT 1975
SUPERSEDING
MIL-A-25708/3A(USAF)
7 November 1972

MILITARY SPECIFICATION SHEET

ANTENNA, BLADE, AS-2686/A (HN CONNECTOR)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the antenna described herein shall consist of this document and the latest issue of Specification MIL-A-25708.

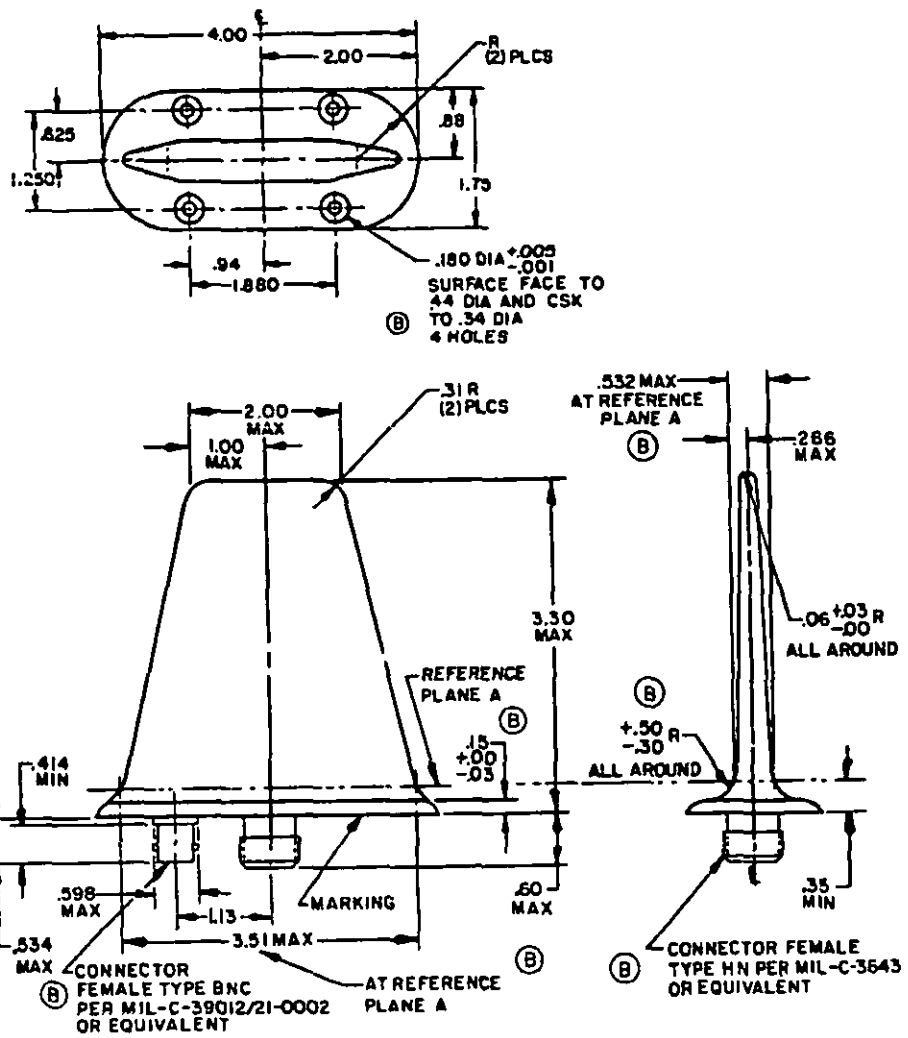


FIGURE 1.

Ⓑ denotes changes

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:07Z
Check the source to verify that this is the current version before use.

Ⓑ

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.02	.30	7.62	.534	13.56	1.13	28.70
.005	.13	.31	7.87	.598	15.19	1.250	31.75
.03	.76	.35	8.89	.60	15.24	1.75	44.45
.06	1.52	.38	9.65	.625	15.88	1.880	47.75
.15	3.81	.414	10.52	.88	22.35	2.00	50.80
.180	4.57	.50	12.70	.94	23.88	3.30	83.82
.266	6.76	.532	13.51	1.00	25.40	3.51	89.15
						4.00	101.60

NOTES: Ⓑ
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals and ±.02 (.51 mm) for two place decimals.
4. The base of the antenna is considered that part that rises from the bottom of the antenna mounting surface to the reference plane "A". Must be not less than .35 (8.89 mm). The cover is that part above reference plane "A".

FIGURE 1. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Materials:
Base: Aluminum alloy per QQ-A-591, alloy 380.
Cover: Suitable material that will resist erosion of impinging particles at velocities up to Mach 2.

Temperature operating range: -55°C to 250°C.

Side loading: 10.5 PSIG (100 pounds).

Frequency range: .960 to 1.220 GHz.

Impedance: 50 ohms nominal.

VSWR:
Antenna: 1.40:1 maximum from .960 to 1.220 GHz.
1.30:1 maximum from 1.000 to 1.100 GHz.
Sampling probe: 1.50:1 maximum from .960 to 1.220 GHz.

Power: 4kW peak, 100 watts average.

Weight: 10 ounces maximum.

Part number: M25708/3-03.

Data list: A data list shall accompany each antenna with VSWR measurement values made at .960, 1.100, and 1.200 GHz.

Intended use: Intended for use on T-38 and F-5 aircraft.

Custodians:
Army - EL
Navy - AS
Air Force - 85

Review activities:
Army - AV
Air Force - 11, 80
DSA - ES

User activities:
Air Force - 70, 71, 84

Preparing activity:
Air Force - 85

(Project 5985-0804-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:07Z
Check the source to verify that this is the current version before use.