MILITARY SPECIFICATION SHEET

SLEEVE (GROMMET), HARD SEAT, REDUCED HEAD, SWAGED, COUNTERSUNK, PANEL FASTENER

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the sleeve grommets described herein shall consist of this specification and the latest issue of MIL-S-85069

1. DESIGN INFORMATION·

Hard seat sleeve grommets covered by this specification sheet are for use in the holes of aircraft reusable composite access panels.

2. MILITARY INSTALLATION AND TOOLS·

No applicable document.

3 REQUIREMENTS

3 1 Material CRES A286 per AMS 5525 (UNS S66286)

3 2 Protective treatment Passivated per QQ-P-35

3 3 Finish Cadmium plate per QQ-P-416, Type II, Class 2, as required

3.4 Surface texture. Unless otherwise specified the surface texture shall be not more than 125 microinches per ANSI B46 1

3.5 Dimensions: Unless otherwise specified dimensions are in inches Dimensions indicated are after plating

3.6 Tolerances: Tolerances are as indicated

3.7 Lubrication None

3.8 Workmanship: Break all sharp edges and remove all burrs and slivers

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil - Downloaded: 2026-02-27 04:52
Check the source to verify that this is the current version before use.

4. ILLUSTRATION:

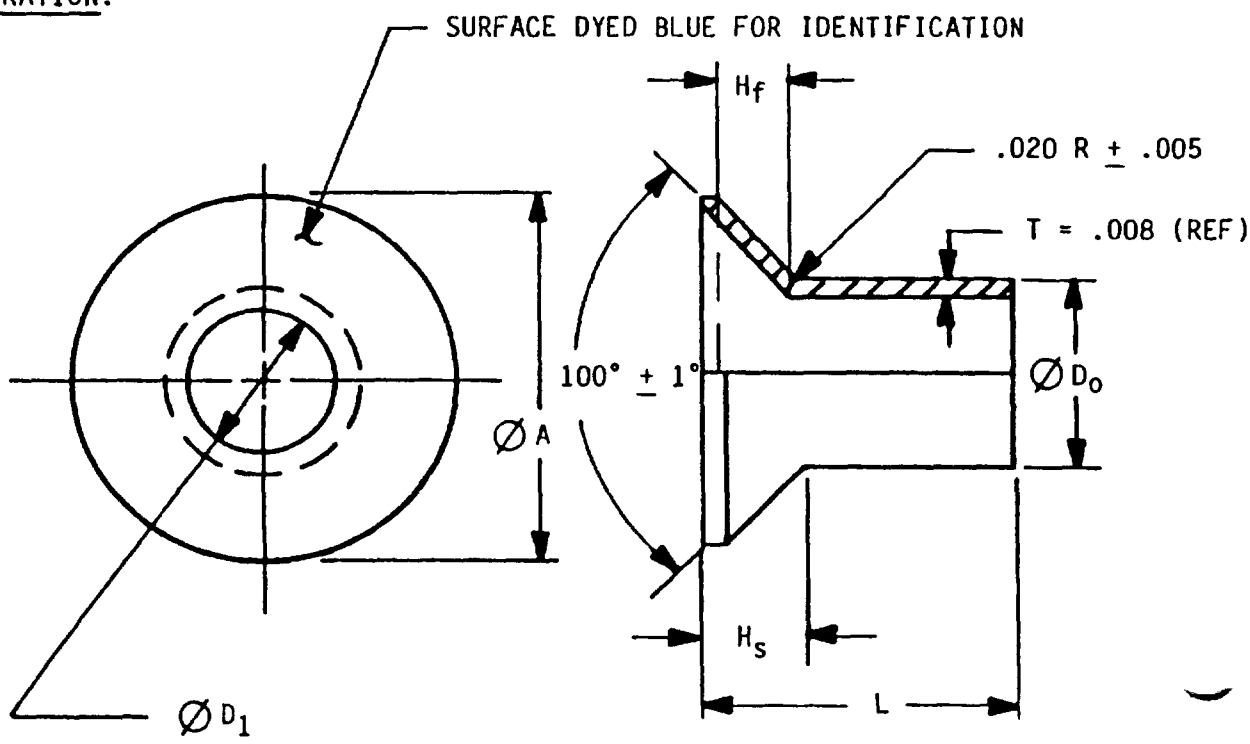


FIGURE 1. Uninstalled grommet

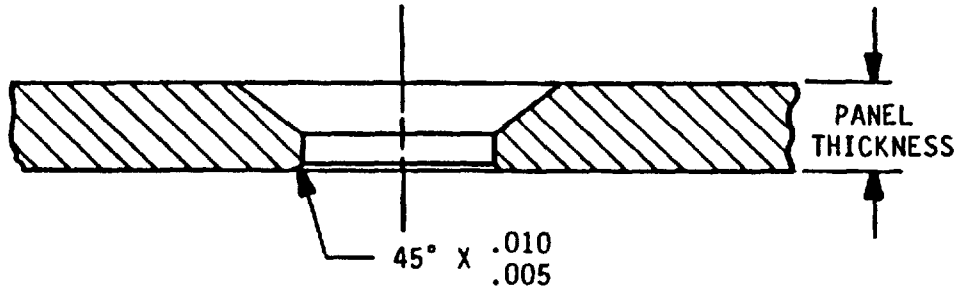


FIGURE 2. Grommet hole preparation

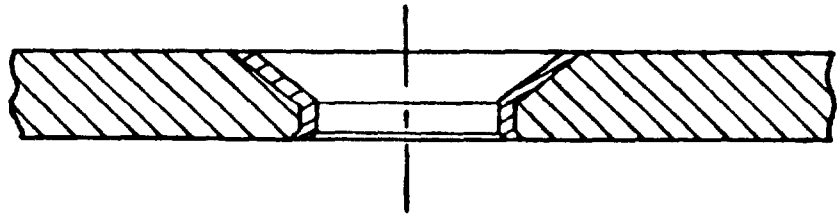


FIGURE 3. Installed grommet

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:19Z
Check the source to verify that this is the current version before use.

5 TABLE I. Grommet Dimensions

Dash No	For Fast Size	ØA ±.005	ØD$_i$	ØD$_o$	H$_r$ Head Height Fast (Ref [a])	H$_s$ Head Height Sleeve (Ref [a])	L ± 010 (b)	Recomm Hole Prep Drill No	Recomm Hole Prep Drill Dia.
08	1/4	393	2545 .2530	2706 .2696	.061	066	1 000	(c)	.273
10	5/16	472	.3170 .3155	.3331 .3321	.068	.073	1.000	(c)	.334
12	3/8	.558	.3795 .3780	.3956 .3946	.078	.083	1 000	(c)	398

(a) Reference dimensions are for design purposes only and are not an inspection or manufacturing requirement.

(b) Uncut sleeve length is 1.000 inch Before installation cut sleeve length to equal panel thickness (see Figure 2)

(c) Special drill is required

6 EXAMPLE OF PART NUMBER

M85069/10 P XX

Basic Part Number

Surface Finish
N = None
P = Cad Plate, Type II, Class 2

Fastener Shank Diameter
Use dash number from table

The sleeves covered by this specification are manufactured under United States Patent numbers 3835615, 3835525, 3679109, 3803895, 3805578, and 3835688. Patents expire in 1 September 1991. The Government does not have a Royalty-Free license.

Custodians
Navy - AS
Air Force - 11
Army - AV

Review Activities:
DLA - IS
Air Force - 99
Army - AR

Preparing Activity:
Navy - AS
(Project No. 5365-0108)

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:19Z
Check the source to verify that this is the current version before use.