MIL-S-85069/5A
30 October 1980
SUPERSEDING
MIL-S-85069/5
15 July 1978

MILITARY SPECIFICATION SHEET

SLEEVES, FASTENER, GROOVED, 100° FLUSH FULL HEAD, TENSION, 1/64 OVERSIZE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the sleeves described herein shall consist of this document and the latest issue of MIL-S-85069.

DESIGN INFORMATION

Sleeves covered by this specification sheet are for use in the repair of discrepant holes and in new design where the holes require protection.
The sleeves are subject to the limitations of MIL-S-85069/1.


REQUIREMENTS

MATERIAL: A286 per AMS5525 (Stainless Steel)

LUBRICATION: Cetyl Alcohol or bare (5)

PROTECTIVE TREATMENT: Passivated per QQ-P-35

PLATING: Cadmium per QQ-P-416, Type II, class 2 exterior only (for identification). Flash plating on bore acceptable. (5)

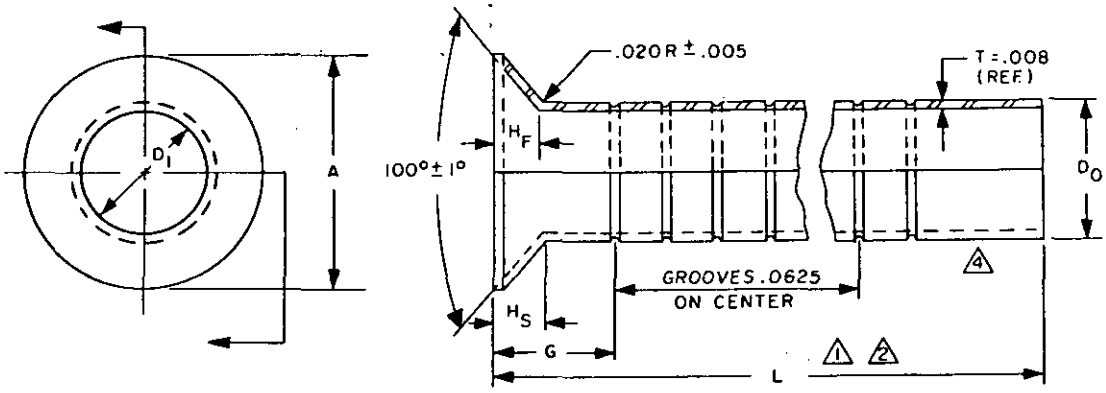

FSC 5365

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:19Z
Check the source to verify that this is the current version before use.

DASH No.	FOR FAST. SIZE (REF)	A DIA. ±.005	D_I DIA.	D_O DIA.	G	H_F HEAD HEIGHT FAST. (REF)	H_S HEAD HEIGHT SLEEVE (REF)	L ±.010	RECOM. ③ HOLE PREP. DRILL NO.	RECOM. ③ HOLE PREP. DRILL DIA.
05	5/32	.312	.1565 / .1550	.1730 / .1720	.125	.065	.070	.750	17	.1730
55	#8	.328	.1635 / .1620	.1800 / .1790	.125	.070	.075	.750	15	.1800
06	#10	.380	.1895 / .1880	.2055 / .2045	.125	.080	.085	1.00	5	.2055
08	1/4	.505	.2495 / .2480	.2656 / .2646	.188	.108	.113	1.00	17/64	.2656
10	5/16	.631	.3120 / .3105	.3281 / .3271	.250	.135	.140	1.00	21/64	.3281
12	3/8	.758	.3745 / .3730	.3906 / .3896	.312	.162	.167	1.00	25/64	.3906

NOTES:

① Dimensions are in inches.

② Sleeves supplied in standard lengths - adjust to required length when needed.

③ Recommended for metal-to-metal to clearance fit of sleeve to hole.

④ Sleeves 05-55 ungrooved last 3/16
Sleeves 06-08 ungrooved last 1/4
Sleeves 10-12 ungrooved last 5/16

⑤ L after part number designates lubricated with cetyl alcohol-B = No Lubrication

P after slash number designates cadmium plated - per QQ-P-416, Type II, Class 2
N after slash number designates no finish except passivated per QQ-P-35.

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:19Z
Check the source to verify that this is the current version before use.

EXAMPLE OF PART NUMBER

M85069/5 P XX L

Basic Part Number

Surface Finish:
N = None
P = Cad Plate, Type II, Class 2

Fastener Shank Diameter
Use dash number from table

Add "L" for cetyl alcohol if required; B=No Lubrication

The sleeves covered by this specification are manufactured under United States Patent numbers 3835615 and 3835525. Both patents expire on 9/1/91. The Government does not have a Royalty-Free license.

Custodians:
Navy - AS
Air Force - 11
Army - AV

Review Activities:
DLA - IS
Air Force - 99
Army - AR

Preparing Activity:
Navy-AS
(Project No. 5365-0048-04)

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:19Z
Check the source to verify that this is the current version before use.