INCH-POUND

MIL-DTL-85069/5B
25 January 2006
SUPERSEDING
MIL-S-85069/5A
30 October 1980

DETAIL SPECIFICATION SHEET

SLEEVES, FASTENER, GROOVED, 100º FLUSH FULL HEAD, TENSION, 1/64 OVERSIZE

This specification sheet is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-85069, "Sleeves, Fastener, General Specification for".

DESIGN INFORMATION: Sleeves covered by this specification sheet are for use in the repair of discrepant holes and in new design where the holes require protection. The sleeves are subject to the limitations of MIL-S-85069/1.

REQUIREMENTS: The fastener sleeves shall be as specified herein and in accordance with figure 1.

1. Material. The fastener sleeves shall be manufactured from A286 stainless steel in accordance with SAE AMS 5525, "Steel, Corrosion and Heat Resistant, Sheet, Strip, and Plate 15Cr - 25.5Ni - 1.2Mo - 2.1Ti - 0.006B - 0.30V 1800 ºF (982 ºC) Solution Heat Treated".

2. Lubrication. The fastener sleeves shall be lubricated with cetyl alcohol or left bare.

L - lubricate with cetyl alcohol
B - no lubrication


3. Protective treatment. The fastener sleeves shall be passivated in accordance with SAE AMS-QQ-P-35, "Passivation Treatments for Corrosion-Resistant Steel".

4. Plating.

P - Cadmium plating in accordance with SAE AMS-QQ-P-416, "Plating, Cadmium (Electrodeposited)", for type II, class 2 exterior only (for identification). Flash plating on bore acceptable.
N - No finish except passivation in accordance with SAE AMS-QQ-P-35.

5. Dimensions. The enclosures shall be manufactured to the size dimensions listed in figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:19Z
Check the source to verify that this is the current version before use.

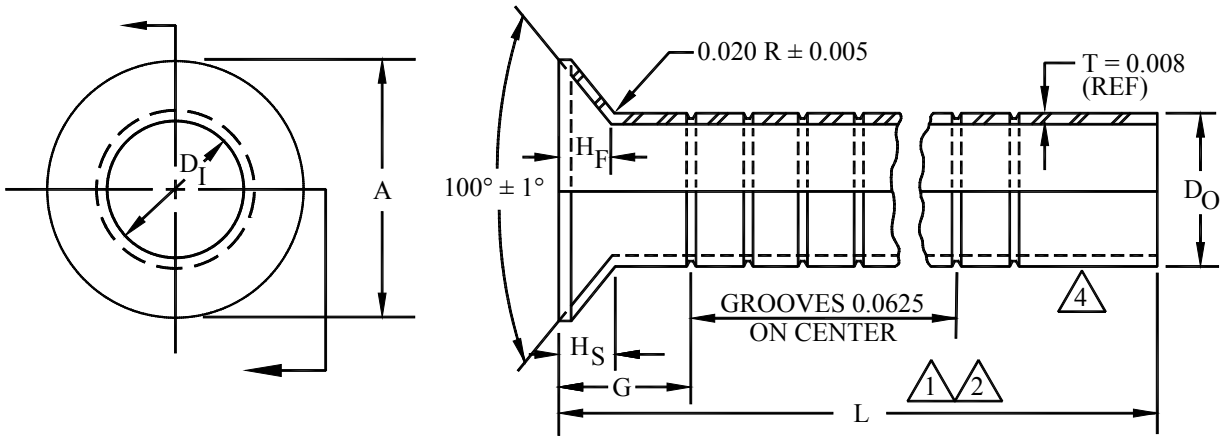

Dash no.	For fast size (ref)	A dia. ±0.005	D_I dia.	D_O dia.	G	H_F head height fastener (ref)	H_S head height sleeve (ref)	L ±0.010	Recommend hole prep 3	
									Drill no.	Drill dia.
05	5/32	0.312	0.1565 0.1550	0.1730 0.1720	0.125	0.065	0.070	0.750	17	0.1730
55	#8	0.328	0.1635 0.1620	0.1800 0.1790	0.125	0.070	0.075	0.750	15	0.1800
06	#10	0.380	0.1895 0.1880	0.2055 0.2045	0.125	0.080	0.085	1.00	5	0.2055
08	1/4	0.505	0.2495 0.2480	0.2656 0.2646	0.188	0.108	0.113	1.00	17/64	0.2656
10	5/16	0.631	0.3120 0.3105	0.3281 0.3271	0.250	0.135	0.140	1.00	21/64	0.3281
12	3/8	0.758	0.3745 0.3730	0.3906 0.3896	0.312	0.162	0.167	1.00	25/64	0.3906

Notes:


1. Dimensions are in inches.
2. Sleeves supplied in standard lengths - adjust to required length when needed.
3. Recommended for metal-to-metal to clearance fit of sleeve to hole.
4. Sleeves 05-55 ungrooved last 3/16
   Sleeves 06-08 ungrooved last 1/4
   Sleeves 10-12 ungrooved last 5/16

FIGURE 1. Fastener sleeve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:19Z
Check the source to verify that this is the current version before use.

GENERAL INFORMATION:

6. Part or identification number (PIN). The PIN to be used for fastener sleeves acquired to this specification is created as follows:

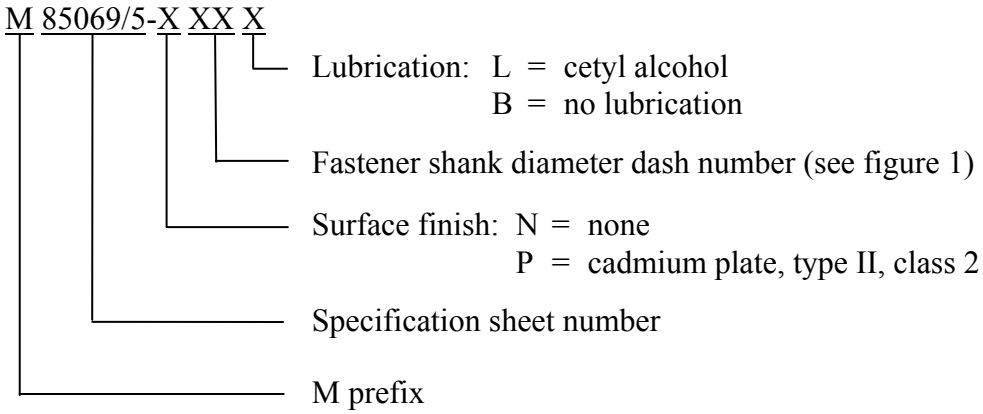

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - AV
Navy - AS
Air Force - 99

Preparing Activity:
DLA - GS7

(Project 5365-0034)

Reviewer:
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:19Z
Check the source to verify that this is the current version before use.