
MILITARY SPECIFICATION SHEET

TIE DOWN ASSEMBLY, HELICOPTER BLADE
CH-53 HELICOPTER

This specification sheet is approved for use within the Naval Air Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring tie down assemblies described herein shall consist of this document and the latest issue in effect of specificationMIL-T-85075(AS).

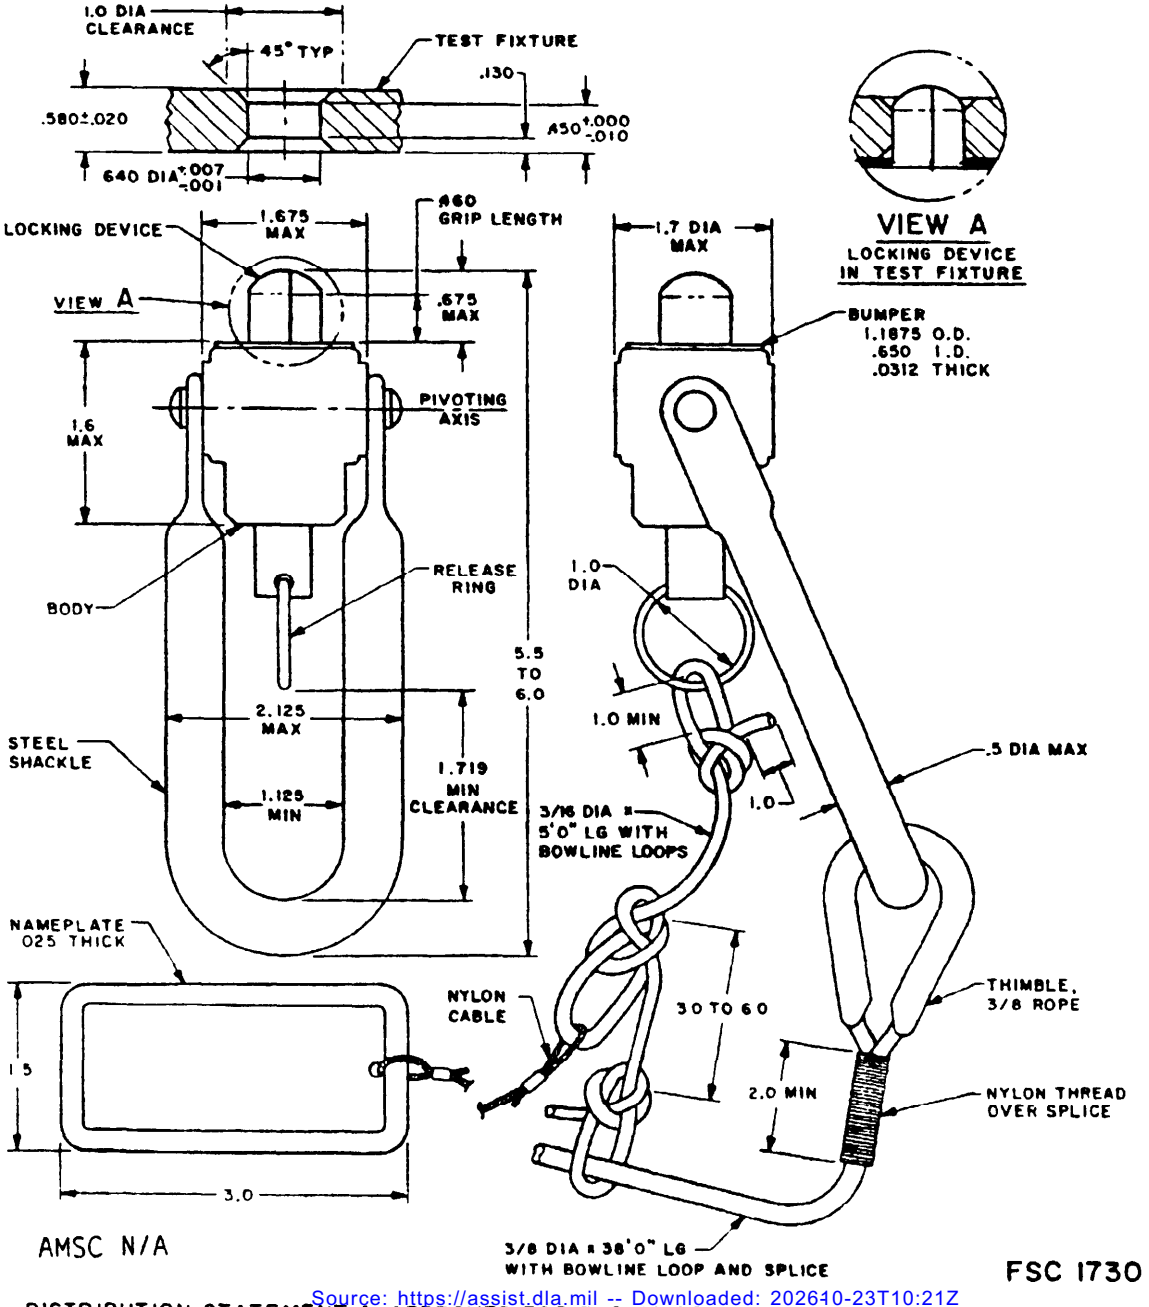

AMSC N/A

FSC 1730

DISTRIBUTION STATEMENT A APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:21Z
Check the source to verify that this is the current version before use.

NOTES:

1. Not drawn to scale.

2. Tolerances unless otherwise specified are as follows: decimal ± 0.010.

3. Each part shall conform to the dimensions shown on the specification sheet. All recurrent dimensions are typical. Where only maximum or minimum dimensions are shown, the part need not have the shape shown, but the part, including all protrusions, shall be contained within the outline shown. Design details which are shown but are not specifically required are shown as examples and for information only; such details are optional.

4. Tie down assembly shall mate with test fixture shown to meet all requirements of this specification sheet and MIL-T-85075(AS). The mating part in the rotor blade is a Receiver (RI-242-2) supplied to the helicopter manufacturer by Norco Inc. of Georgetown, Conn. It shall be preferred that this mating part (Receiver) be used for all tests.

5. Shackle shall pivot 180° minimum about the pivoting axis when installed in test fixture.

6. Total weight of tie down assembly not including rope shall be no greater than 0.80 pounds.

7. Test fixture shall be 17-4 PH steel, in accordance with AMS 5643, condition H 1025, and shall meet the dimensions of this specification.

8. The 3/16 and the 3/8 diameter nylon rope shall be secured to the tie down assembly by means of a splice. A bowline knot may be used for a replacement rope when splicing facilities are not available.

9. It shall be mandatory that each new supplier qualify his tie down assembly in accordance with the first article inspection of para 4.3 of MIL-T-85075(AS).

REQUIREMENTS:

LOADING -	See load test (MIL-T-85075(AS)) Load Requirement - 2800 pounds
MARKING -	The complete standard part number and the manufacturer's name, trademark, or FSCM number shall be placed in a convenient location on the body of the tie down assembly.

MATERIALS -

LOCKING DEVICE -	17-4 PH corrosion resistant steel in accordance with AMS 5643, heat treated to condition H 1025 and passivated.
BUMPER -	Oil resistant rubber, 40 durometer; bonded to the body by heat bonding or other means which would prevent its looseness in service.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:21Z
Check the source to verify that this is the current version before use.

MATERIALS - (Continued)

ROPE - Nylon, per MIL-R-17343D seared.

NAMEPLATE - Aluminum, marked in accordance with MIL-STD-130. The nomenclature, part number, and. contract or order number shall appear on the nameplate.

PART NUMBER:

Part numbers shall consist of the following (in sequence)

1. The letter “M”.
2. The general specification number.
3. A slash, and slash number of this specification sheet.
4. The revision letter.

EXAMPLE: M85075/2A

INTENDED USE:

Tie down assembly procured by this specification are intended for use in securing the blades of landed CH-53 helicopters.

Preparing Activity
Navy - AS
(Project No. 1730-N283)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:21Z
Check the source to verify that this is the current version before use.