MILITARY SPECIFICATION

CASE, SHIPPING, MULTIPURPOSE: 10539225

This amendment forms a part of Military Specification MIL-C-60182(MU) dated 1 March 1965.

* Paragraph 2.1: Delete: "MIL-A-5090 Adhesives, Heat Resistant, Airframe Structural, "Metal to Metal"

Paragraph 2.1, Drawings: Delete: "D10526191, F10526190 and F10526600".

Paragraph 3.3.3, 5th sentence: Delete and substitute: "The upper and lower extrusions shall be joined by butt welding or brazing which shall be ground smooth and exhibit soundness of good practices conforming to MIL-W-8604 or MIL-B-23362."

Paragraph 3.3.3.2: Delete in entirety and substitute the following:

* "3.3.3.2 Bonding of extrusions.- The extrusion edge assemblies shall be attached to the case shells with an air curable adhesive sealant, conforming to General Electric RTV 118 and Primer SCP 154, General Electric Co., Waterford, N. Y. or equal. The primer shall be applied to the mating surfaces of the shells and extrusions and permitted to dry for a minimum of thirty (30) minutes. The sealant shall be applied into the extrusion well and the extrusions shall be assembled to the shells to provide structural integrity and watertight joint. Minimum cure time for sealant is twenty-four (24) hours. The extrusion edge assemblies shall be tool rolled and crimped around the periphery to assure positive attachment to case shells."

Paragraph 3.3.6, 4th sentence: Delete "X24078" and substitute "X24087".

Paragraph 3.3.7: Delete 2nd sentence and substitute the following:

"The gasket shall be formed by molding, vulcanizing or butt bonding. Butt bonding the ends of the gasket shall be with adhesive conforming to MIL-A-5092, Type II."

Paragraph 3.4.1: Delete 2nd sentence and substitute the following:

"A slotted cut-out for case handle and breather valve shall be provided in upper cushion only."

Paragraph 4.6.1: Delete "Table II, Class b: and substitute "Table III, Method b."

FSC 1220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.

Paragraph 6.1, Delete: "Memory- Part No. 10526600."

Figures 3 and 4, Suggested Material Sources: Delete "Part No. R40-1211-CPA-1492" and substitute "Part No. R40-4313-CPA-1492."

Figures 3 and 4, Suggested Material Sources: Delete "Boltaron Series 6000"

* Delete: "Figure 6" and substitute attached "Figure 6".

*The outside margins have been marked to indicate where additions to the previous amendment have been made. This has been done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in this notation. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notation and relationship to the last previous amendment.

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1220-A082

Source: https://assist.dla.mil - Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.

NOTES:

1. INTERCHANGEABLE CUSHION INSERTS SHALL BE FABRICATED BY DIE CUT METHOD FROM POLYURETHANE (POLYETHER FORMULATION) 1.8 LBS/CUBIC FOOT DENSITY CONFORMING TO MIL-P-26514. COLOR-CHARCOAL OR GRAY.

2. TOLERANCE:
   FRACTIONS ± 1/16
   ANGLES ± 1°

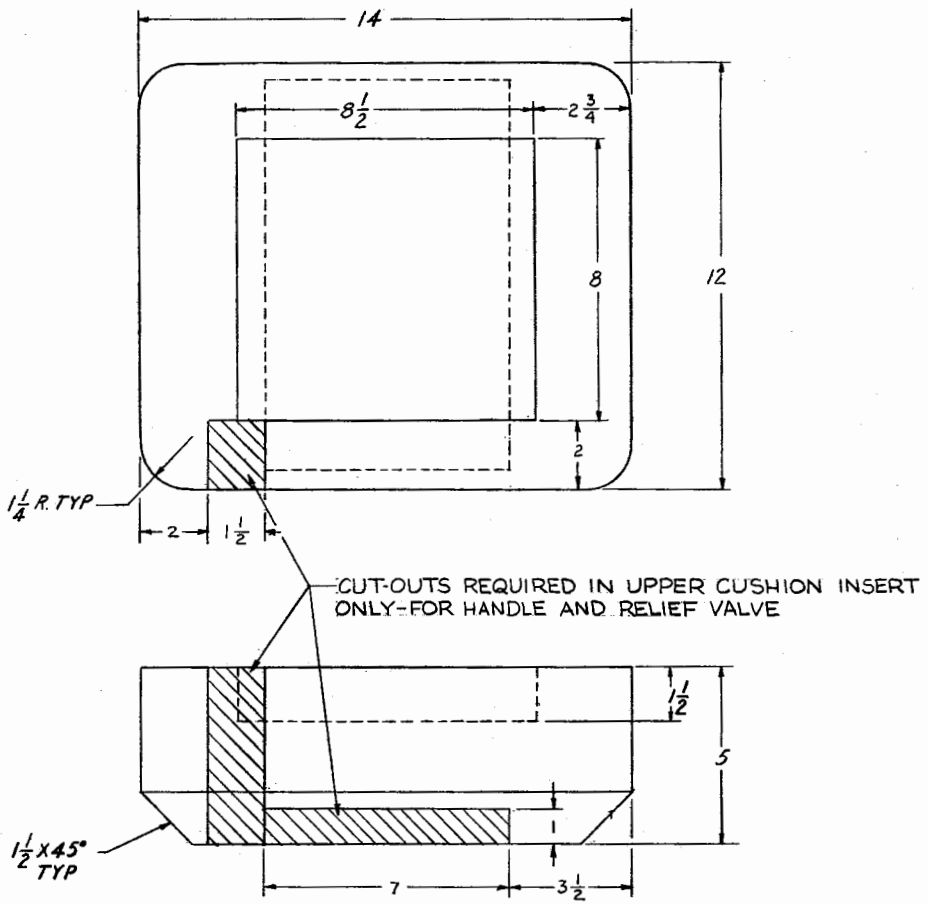

FIGURE 6 - CUSHION INSERT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.