INCH-POUND

MIL-DTL-55302/171B
13 May 2005
SUPERSEDING
MIL-C-55302/171A(USAF)
10 June 1986

DETAIL SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: LOW MATING FORCE, CONTACT BRUSH

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.

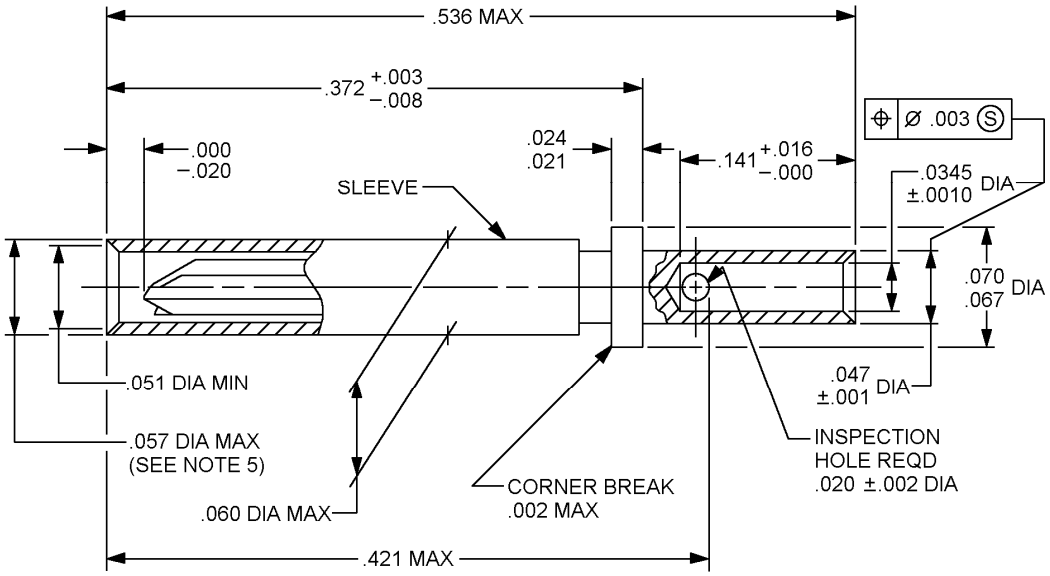

Inches	mm	Inches	mm	Inches	mm
.000	0.00	.020	0.51	.060	1.52
.0010	0.025	.021	0.53	.067	1.70
.001	0.03	.024	0.61	.070	1.78
.002	0.05	.0345	0.876	.141	3.58
.003	0.08	.047	1.19	.372	9.45
.008	0.20	.051	1.29	.421	10.69
.016	0.41	.057	1.45	.536	13.61

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Crimp well accommodates size 22 to 28 AWG wire and M22520/2-01 crimp tool with Daniels Locator K743, or equivalent.
4. Use with connector MIL-DTL-55302/169.
5. Applies to within .020 of entry minimum.

FIGURE 1. Contact, brush, crimp removable..

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Contacts: Each contact shall contain 7 brush wires with a tolerance limit of ± 1. Each brush wire diameter shall be .0073 to .0085 inch (0.185 mm to 0.216 mm).

Material:

Body: In accordance with MIL-DTL-55302 or approved equivalent.

Sleeve: Stainless steel in accordance with MIL-DTL-55302.

Plating: The contact termination plating shall be in accordance with table I. Brush wire plating shall be gold in accordance with ASTM B488, type II, code C, class 1.27 over nickel in accordance with SAE-AMS-QQ-N-290. Cut ends or brush wires need not be plated.

Part or Identifying Number (PIN): M55302/171- (contact plating indicator from table I).

TABLE I. Contact tail plating.

Indicator	Plating
1	Tin lead in accordance with SAE-AMS-P-81728, 50 to 70 percent tin, .0001 minimum thick over copper plating.
2	Gold in accordance with ASTM B488, type II, code C, class 0.51 over nickel in accordance SAE-AMS-QQ-N-290.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-55302, this document references the following:

MIL-DTL-55302/169
ASTM B488
SAE-AMS-QQ-N-290
SAE-AMS-P-81728

CONCLUDING MATERIAL

Custodians:
Air Force – 11
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-4458-000)

Review activities:
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:55Z
Check the source to verify that this is the current version before use.