MILITARY SPECIFICATION SHEET

CAPACITORS, CHIP, MULTIPLE LAYER, FIXED, UNENCAPSULATED, CERAMIC DIELECTRIC, ESTABLISHED RELIABILITY STYLE CDR06

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-55681.

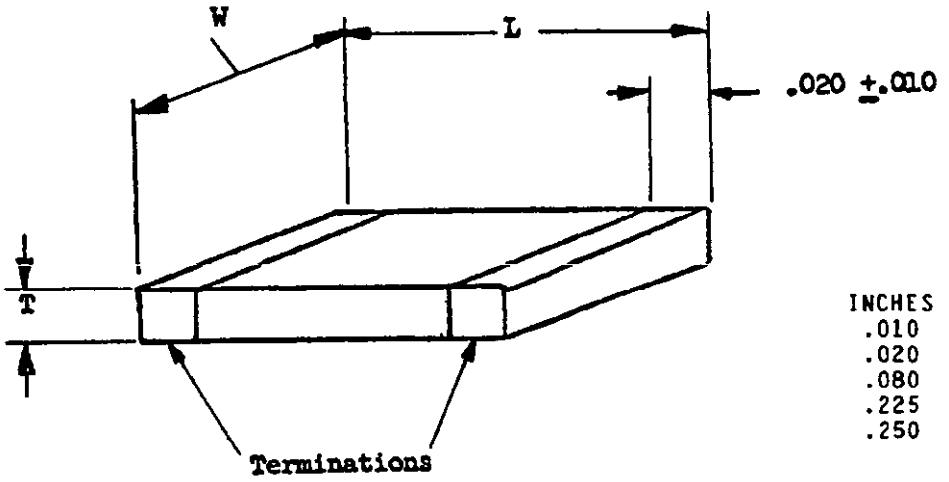

INCHES	MM
.010	.25
.020	.51
.080	2.03
.225	5.72
.250	6.35

Ⓑ

Dimensions				
Style	L ±.020	W ±.020	T	
			Min.	Max.
CDR06	.225	.250	.020	.080

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only and are based upon 1.00 inch = 25.4mm.

Figure 1. Style CDR06 capacitors.

Ⓑ denotes changes

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:54Z
Check the source to verify that this is the current version before use.

TABLE I.

Type designation 1/	Capacitance	Capacitance tolerance	Rated temperature and voltage-temperature limits	Rated voltage
	pF			volts, dc
CDR06BP682B---	6,800	J, K	BP	100
CDR06BP822B---	8,200	J, K	BP	100
CDR06BP103B---	10,000	J, K	BP	100
CDR06BX394AK--	390,000	K	BX	50
CDR06BX474A---	470,000	K, M	BX	50

1/ Complete type designation will include additional symbols to indicate capacitance tolerance, termination finish, and failure rate level.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Body structure: Multi-layer, unencapsulated monolithic ceramic.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature range: -55°C to +125°C.

Marking: Full marking in accordance with MIL-C-55681.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - AS, OS
Air Force - 17, 85, 99
DLA - ES

User activities:
Army -
Navy - MC, SH
Air Force - 19

Agent:
DLA - ES

Preparing Activity:
Army - ER

(Project 5910-1408)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:54Z
Check the source to verify that this is the current version before use.