MILITARY SPECIFICATION SHEET

POSTS, BINDING, ELECTRICAL (UNINSULATED), TYPES PB02DC01 AND PB02DC02

The complete requirements for procuring the binding posts described herein shall consist of this document and the latest issue of Specification MIL-P-55149.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

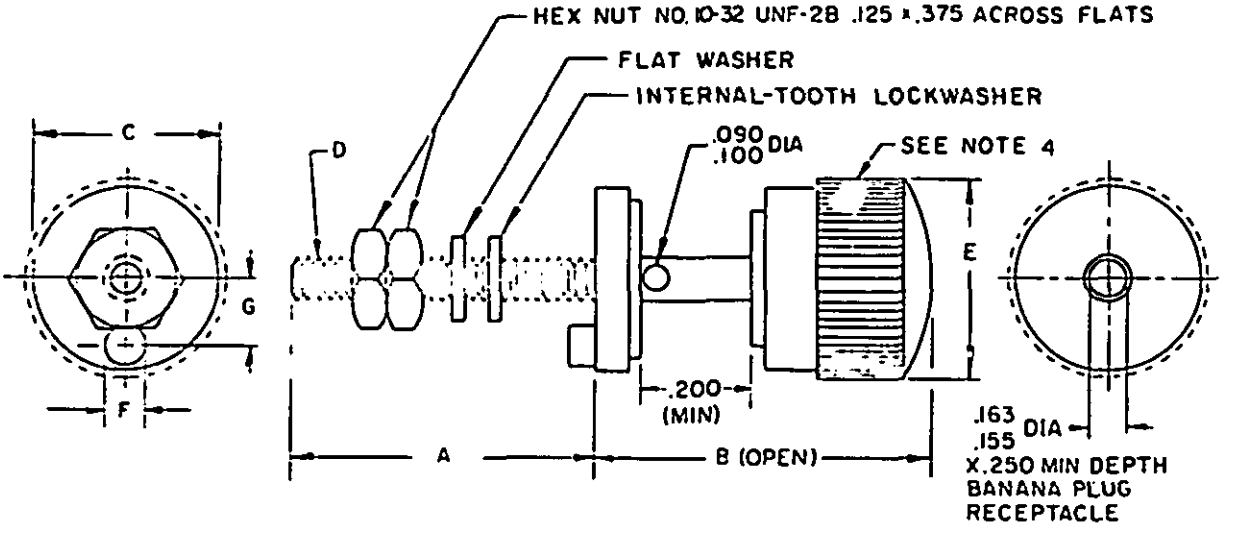

Type designation	Insulation color	Dimensions							Used on panel thickness (Reference information)
		A	B	C	D	E	F	G	
PB02DC01	Red	1.125	1.250	0.687	10-32 UNF-2A	0.750	0.144	0.250	.062 min
PB02DC02	Black								

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is .xxx ± .015(.38 mm).
4. This is insulated portion.
5. Drawing depicts only general characteristics and is not intended to limit specific manufacturing processes. Shape of insulated portion is optional.
6. The wire hole shall be perpendicular to the nonturn feature and the outer OD should touch the base.

INCHES	MM	INCHES	MM	INCHES	MM
.062	1.57	.155	3.94	.687	17.45
.090	2.29	.163	4.14	.750	19.05
.100	2.54	.200	5.08	1.125	28.58
.125	3.18	.250	6.35	1.250	31.75
.144	3.66	.375	9.53		

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: *See figure.*

Contact resistance: Applicable.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - EL, MI, AT
Navy - AS
Air Force -
DSA - GS

User activities:
Army - WC
Navy - OS, SH, MC
Air Force - 17

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5940-0628)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:28Z
Check the source to verify that this is the current version before use.