MILITARY SPECIFICATION SHEET

POST, BINDING, ELECTRICAL (UNINSULATED),

TYPE PB05NC01

The complete requirements for procuring the binding posts described herein shall consist of this document and the latest issue of Specification MIL-P-55149.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

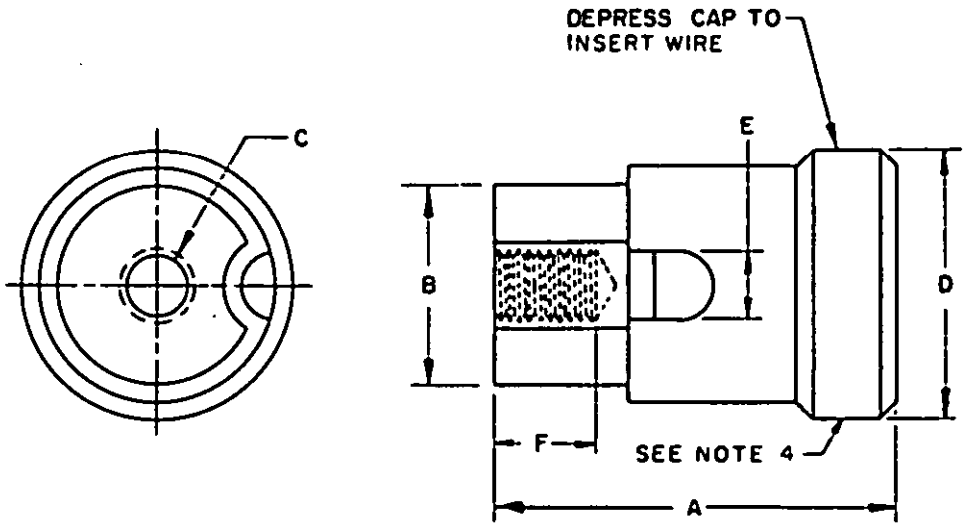

INCHES	MM
.125	3.18
.188	4.78
.375	9.53
.500	12.70
.750	19.05

Type designation	Insulation color	Dimensions					
		A max	B	C	D	E	F
PB05NC01	Black	.750	.375	6-32 UNC-2B	.500	.125	.188

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is .xxx ± .015(.38 mm).
4. This is insulated portion.
5. Drawing depicts only general characteristics and is not intended to limit specific manufacturing processes. Shape of insulated portion is optional.

5 7c-t

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Cap spring pressure: 5 pounds minimum; 9 pounds maximum.

Conductor retention: Method I.

Vibration: Applicable.

Shock: Applicable.

Cap retention: Applicable.

Contact resistance: Applicable.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - EL, MI, AT
Navy - AS
Air Force -
DSA - GS

User activities:
Army - WC
Navy - OS, SH, MC
Air Force - 17

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5940-0631)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:29Z
Check the source to verify that this is the current version before use.