MILITARY SPECIFICATION SHEET

TERMINALS, STUD (INSULATED),

STYLE SE27

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the terminals described herein shall consist of this document and the latest issue of Specification MIL-T-55155.

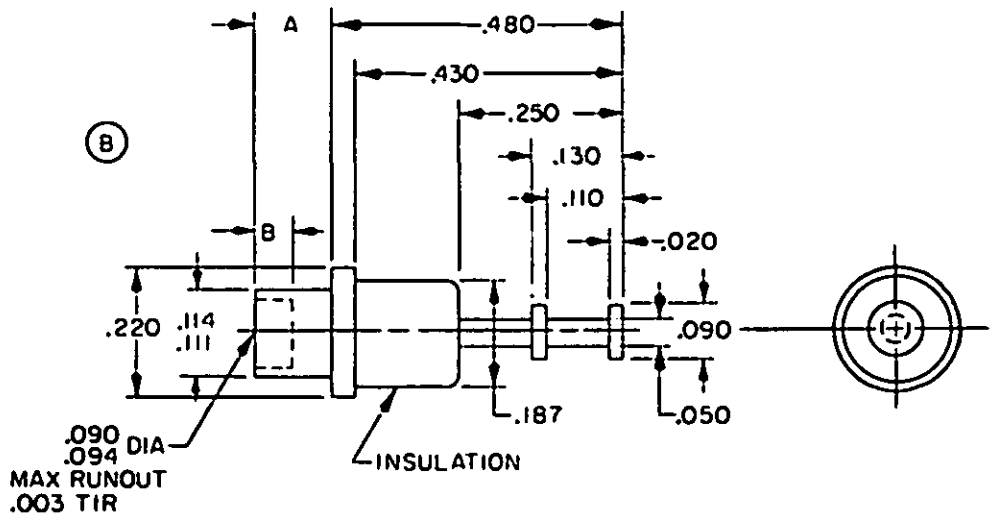

Ⓑ

Type designation	Dimensions		Mounting board thickness (reference)
	A ±0.003	B	
SE27-C01	.073	.062	.031
SE27-C02	.096	.070	.050
SE27-C03	.103		.062
SE27-C04	.133		.093
SE27-C05	.163		.125

INCH	MM	INCH	MM
.003	.08	.110	2.79
.020	.51	.111	2.82
.031	.79	.114	2.90
.050	1.27	.125	3.18
.062	1.57	.130	3.30
.070	1.78	.133	3.38
.073	1.85	.163	4.14
.090	2.29	.187	4.75
.093	2.36	.220	5.59
.094	2.39	.250	6.35
.096	2.44	.430	10.92
.103	2.62	.480	12.19

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005(.13 mm).
4. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.
5. Dash in type designation allows for different insulation colors in accordance with MIL-T-55155.

Ⓑ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Insulation material: Diallyl phthalate.

Dielectric withstanding voltage:

	Volts ac (rms) (min)
At atmospheric pressure - - - - - - - - - -	3,500
At reduced barometric pressure - - - - - -	1,400

Pull: 10 pounds, min.

Torque: 3 ounce-inches, min.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - MI, MU, SL, WC
Navy -
Air Force - 11, 80
DSA - GS

User activities:
Army -
Navy -
Air Force -

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5940-0732)

☆U.S. GOVERNMENT PRINTING OFFICE:1973-714-543/4118

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:30Z
Check the source to verify that this is the current version before use.