MIL-F-16377/30A(SH)
9 May 1983
SUPERSEDED
MIL-F-16377/30(SHIPS)
30 November 1970


MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING; INCANDESCENT, GENERAL LIGHTING FOR PSYCHIATRIC WARDS

100 WATTS, 120 VOLTS, DRIPPROOF 15 DEGREES, SYMBOL 137

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SH),

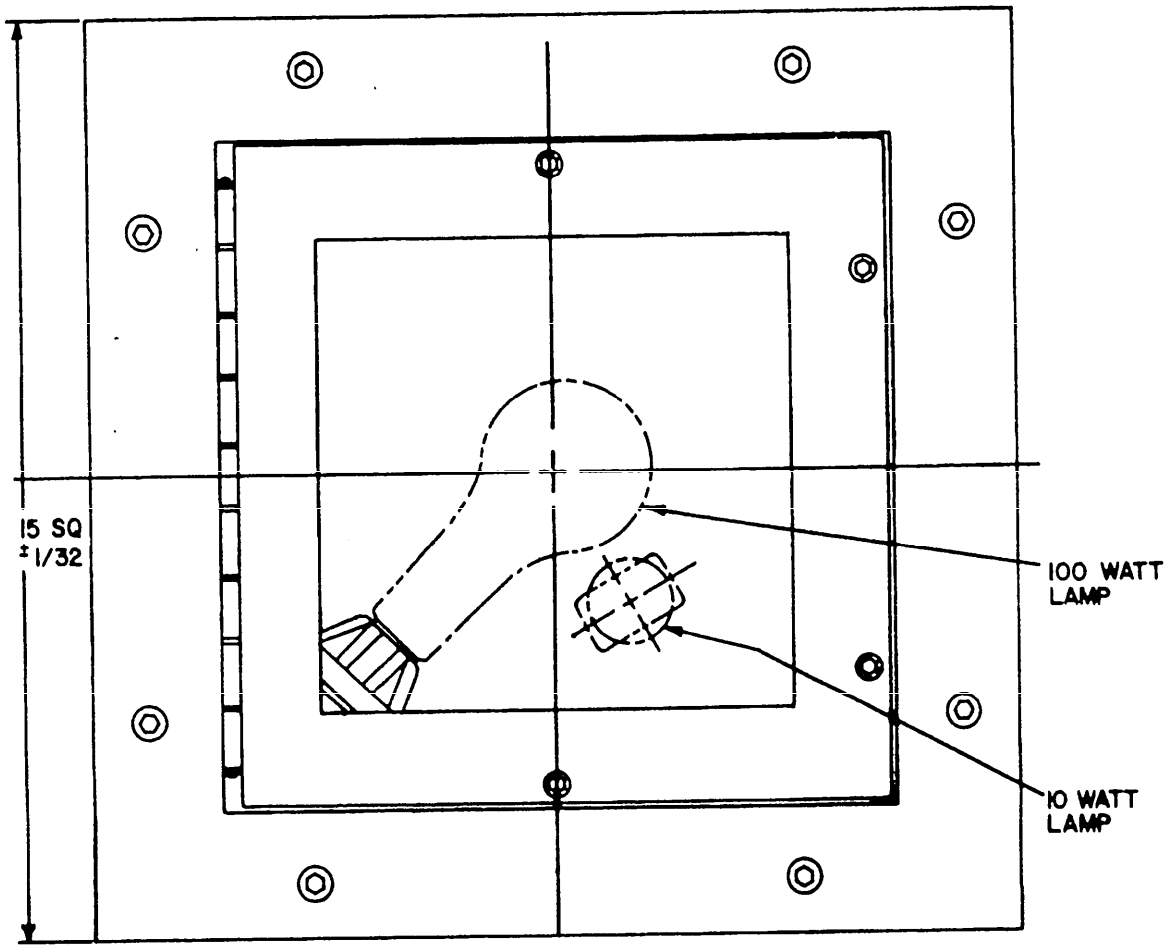

SH8763A

FIGURE 1. Typical view of Symbol 137.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

(A) denotes changes.

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:45Z
Check the source to verify that this is the current version before use.

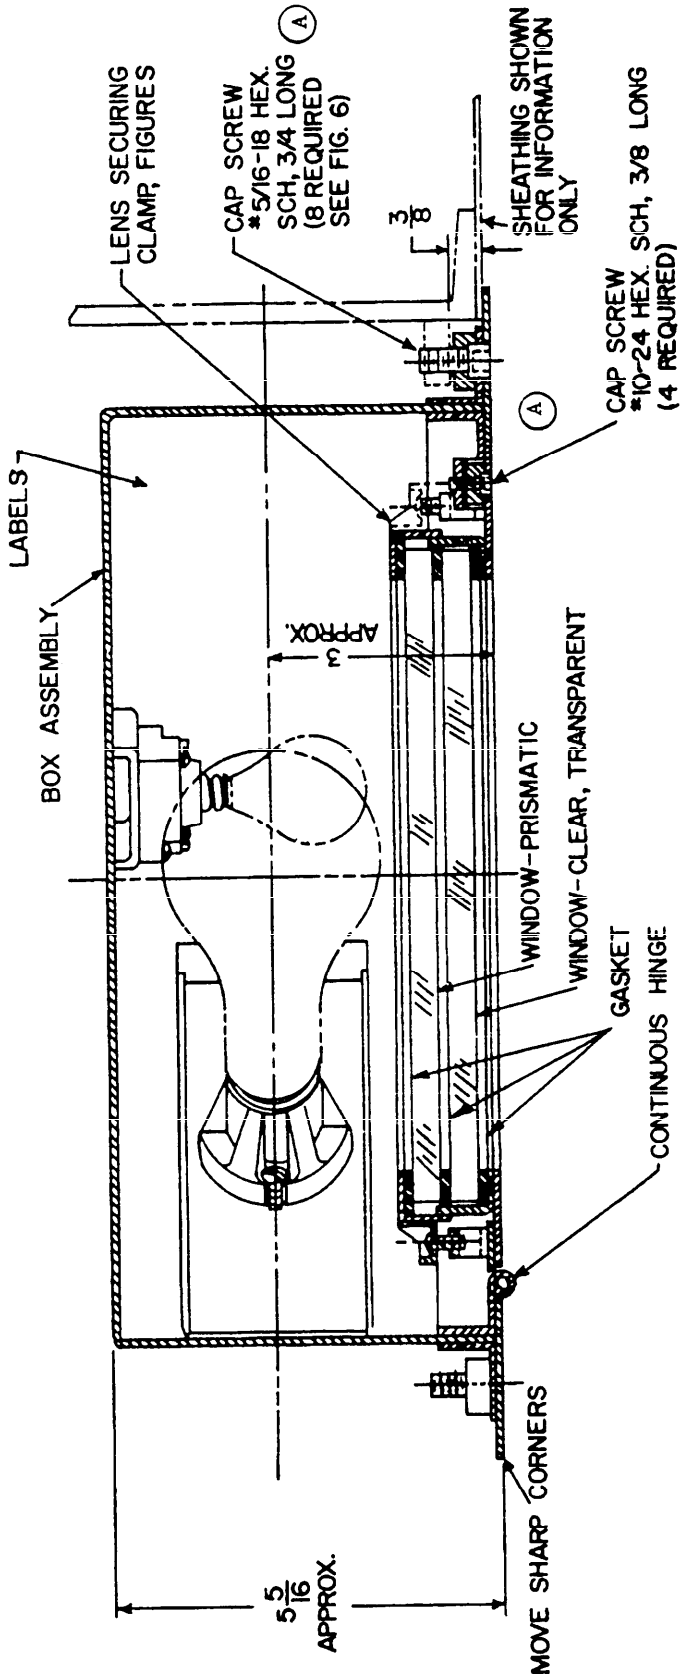


FIGURE 2. Typical section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:45Z
Check the source to verify that this is the current version before use.

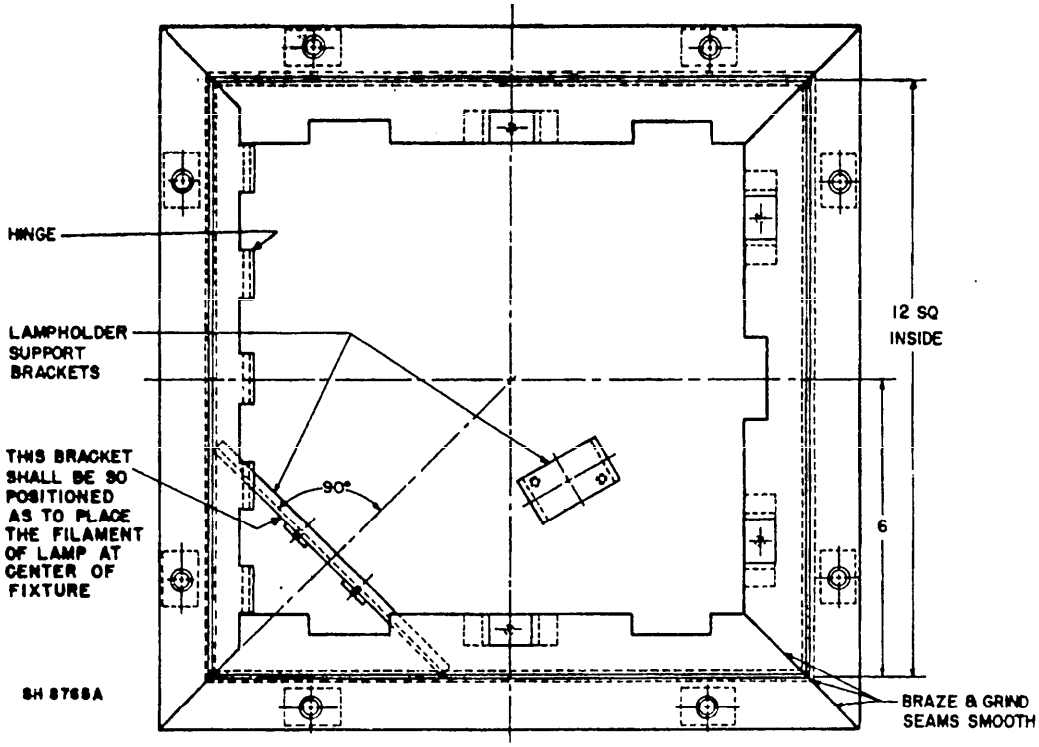


FIGURE 3. Box assembly.

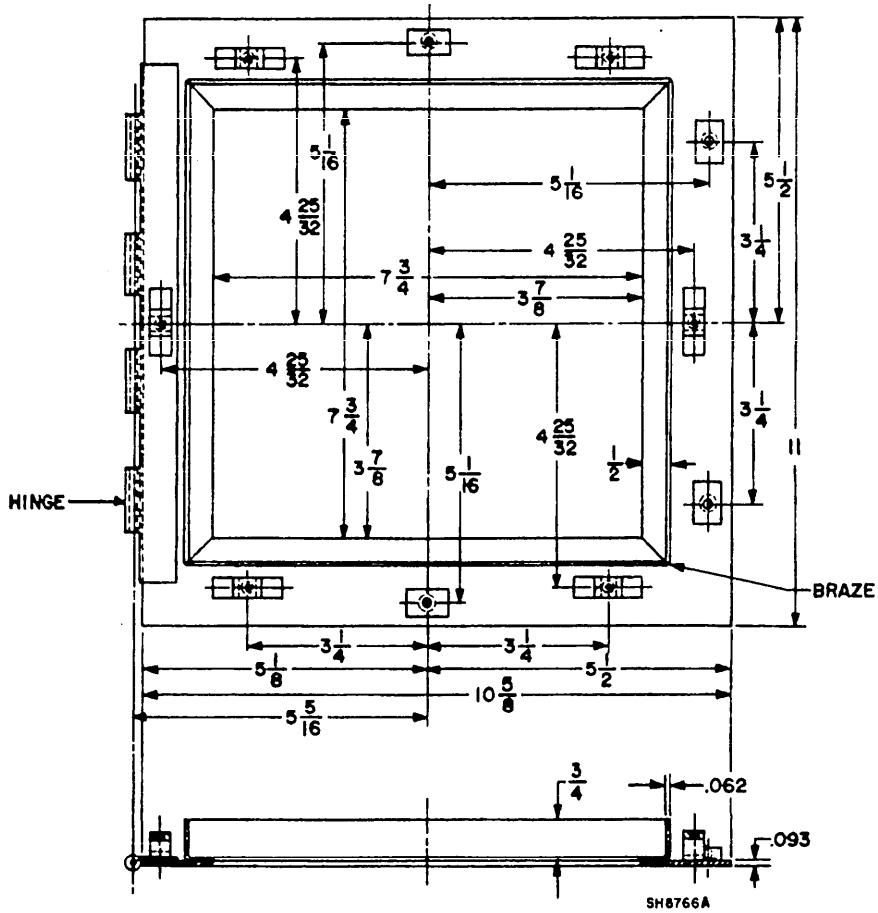


FIGURE 4. Cover assembly.

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:45Z
Check the source to verify that this is the current version before use.

available for use by all Departments and Agencies of the Department of Defense.

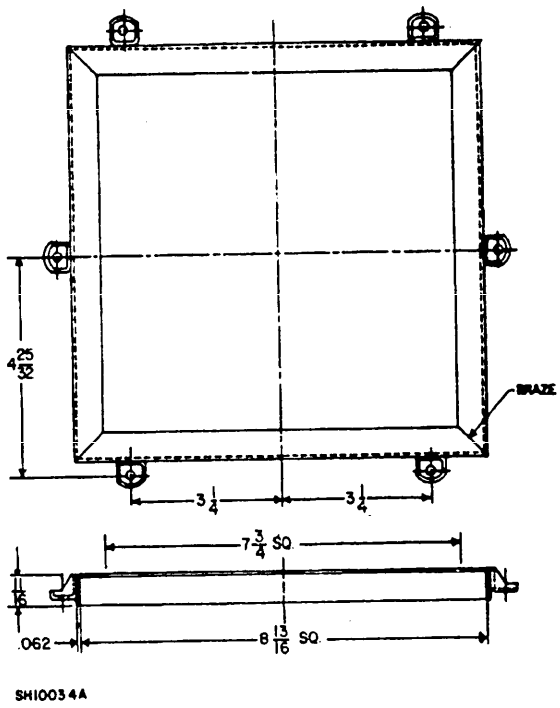


FIGURE 5. Lens securing clamp.


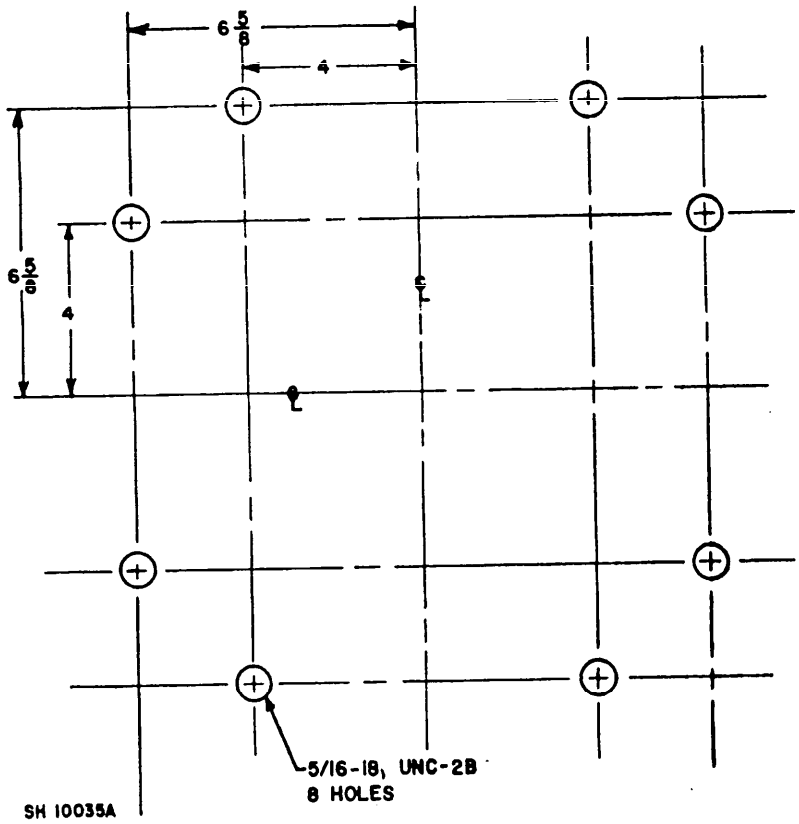


FIGURE 6. Mounting dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:45Z
Check the source to verify that this is the current version before use.

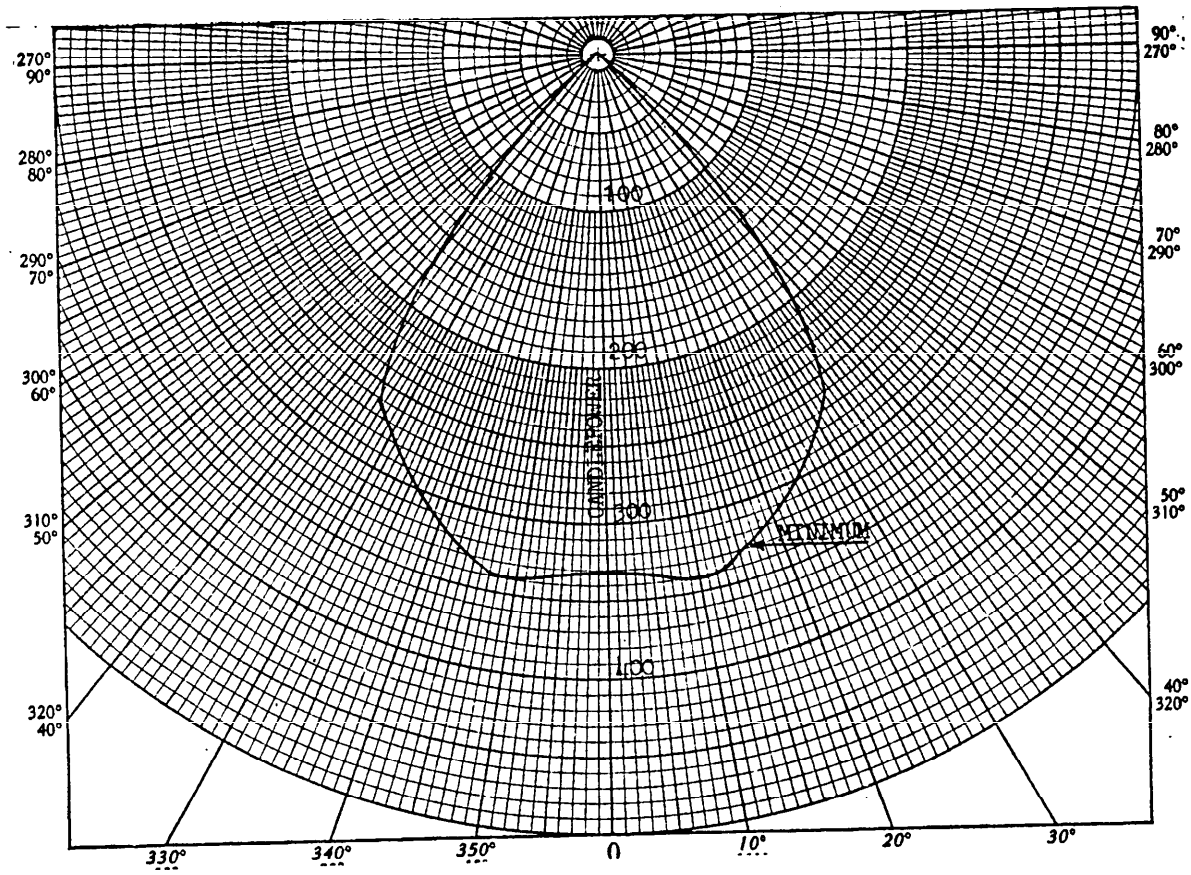

ANGLE	CANDLEPOWER SYMBOL 137
0	332
5	335
10	340
15	330
20	315
25	295
30	275
35	240
40	160
45	40
50	30
55	25
60	18

ANGLE	CANDLEPOWER SYMBOL 137
65	12
70	10
75	7
80	5
85	2
90	0
95	0
100	0
105	0
110	0
115	0
120	0
125	0

Photometric test data:

Distance - - - 10 feet
Voltage: 120 volts.
Ambient temperature: 76°F
Test lamp, 100 watts, rough service, conforming to MS15541-2 will be furnished by laboratory.

FIGURE 7. Candlepower distribution curve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:
Type: II
Class: 2
Symbol 137: Fixture for use with one 100-watt white lamp and one 10-watt white lamp for overhead general lighting in phychiatric wards.
Design:
Electrical rating: 120 volts, 100 watts.
Dimensions and configuration: See figures 1 through 6.
Enclosure, cover lens securing clamp, face plates and brackets: Steel.
Window: Clear, transparent, heat resistant, high impact glass 8-1/2 by 8-1/2 by 3/8 inch having an 85 percent minimum light transmittance.
Window: Clear, prismatic, Holophane Controlens Catalogue No. 739, or equal.
Lampholders:
For use with 100-watt lamp: Medium screw, MIL-L-970/6 two contact.
For use with 10-watt lamp: Candelabra screw, MIL-L-970/1.
Hardware: All exterior screws shall be recessed to provide a smooth flush surface to the fixture, and shall be of the recessed socket type.
Lamp: This fixture shall be designed to accommodate one 100-watt white lamp in accordance with MS15541-2 industry number 100A/RS(120) and one 10-watt lamp in accordance with MS15575-3 industry number 10S11/79. Lamps are not furnished.
Weight: 23 pounds, 7 ounces, maximum.
Labels: Labels shall be furnished in accordance with MIL-F-16377. One type IV label shall be applied as shown on figure 2. The information to be shown on the type IV label shall be:

"INSTALL ONLY:
100-WATT LAMP, NSN6240-00-246-5052
AND
10-WATT LAMP, NSN6240-00-143-3063"

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection:	
Complete fixtures:	See table I
Windows:	See table II
Quality conformance:	
Comparison inspection:	Same as the first article inspection
Inspection of product for delivery:	
Examination:	See MIL-F-16377
Examination for preparation of delivery:	See MIL-F-16377
Quality conformance tests:	See MIL-F-16377

TABLE I. First article and comparison inspection for complete fixtures.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Enclosure effectiveness	3.5.11	4.8.14	Dripproof
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Optical uniformity	3.7.4.1.1	4.8.4	
Transmittance	3.7.3.1	4.8.6.3	M16377/30-001 only

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:45Z
Check the source to verify that this is the current version before use.

TABLE II. First article and comparison inspection for windows.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Optical uniformity	3.7.4.1.1	4.8.4	
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Transmittance	3.7.3.1	4.8.6.3	M16377/30-001 only

General information: Assignment of Military part numbers and general information is shown in table III.

TABLE III. Part number and general information.

Military Part number M16377/30-	Item name	National Stock Number (NSN)	Supersedes part number
137	Complete fixture, Symbol 137	6210-00-152-2844	1/ MS17316-137
001	Lens-Clear transparent		9000-S6401-74222-96
002	Lens-Clear prismatic		9000-S6401-74222-97

1/ Formerly covered on Drawing 9000-S6401-73420.

Preparing activity:
Navy - SH
(Project 6210-N578)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:45Z
Check the source to verify that this is the current version before use.