MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING; INCANDESCENT, DETAIL LIGHTING FOR SPOT ILLUMINATION

6-25 WATTS, 120 VOLTS, TOTALLY ENCLOSED, SYMBOL 147.2

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SH).

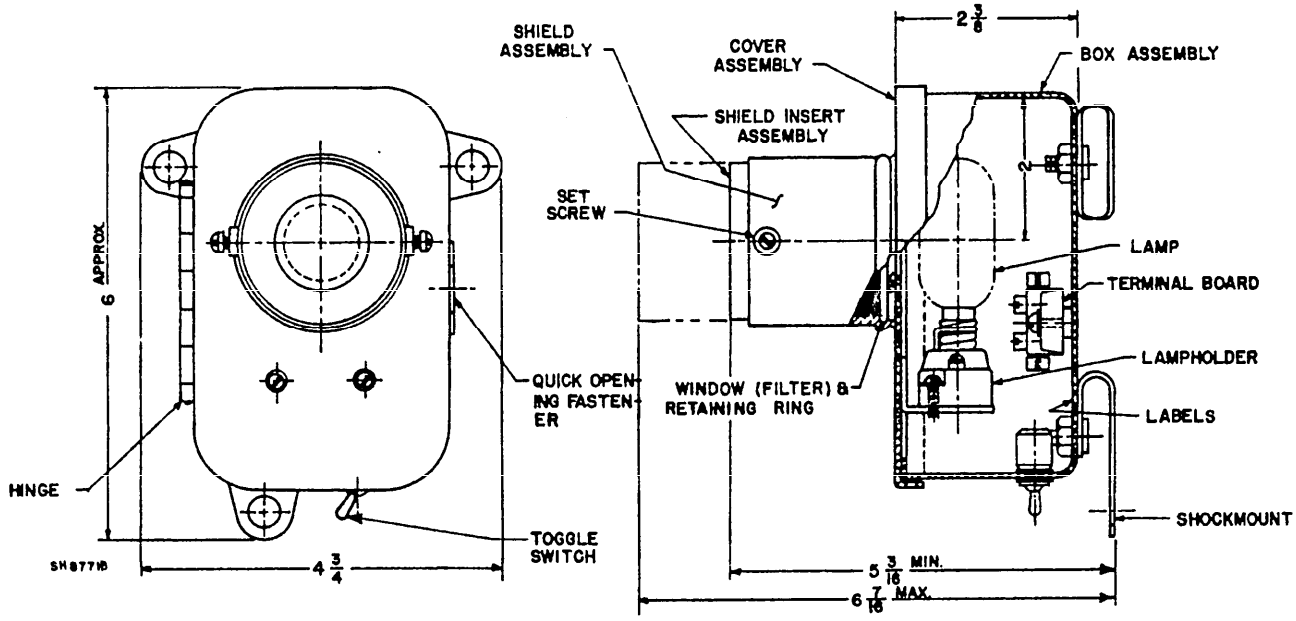


FIGURE 1. Typical view of Symbol 147.2.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

(A) denotes changes

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.

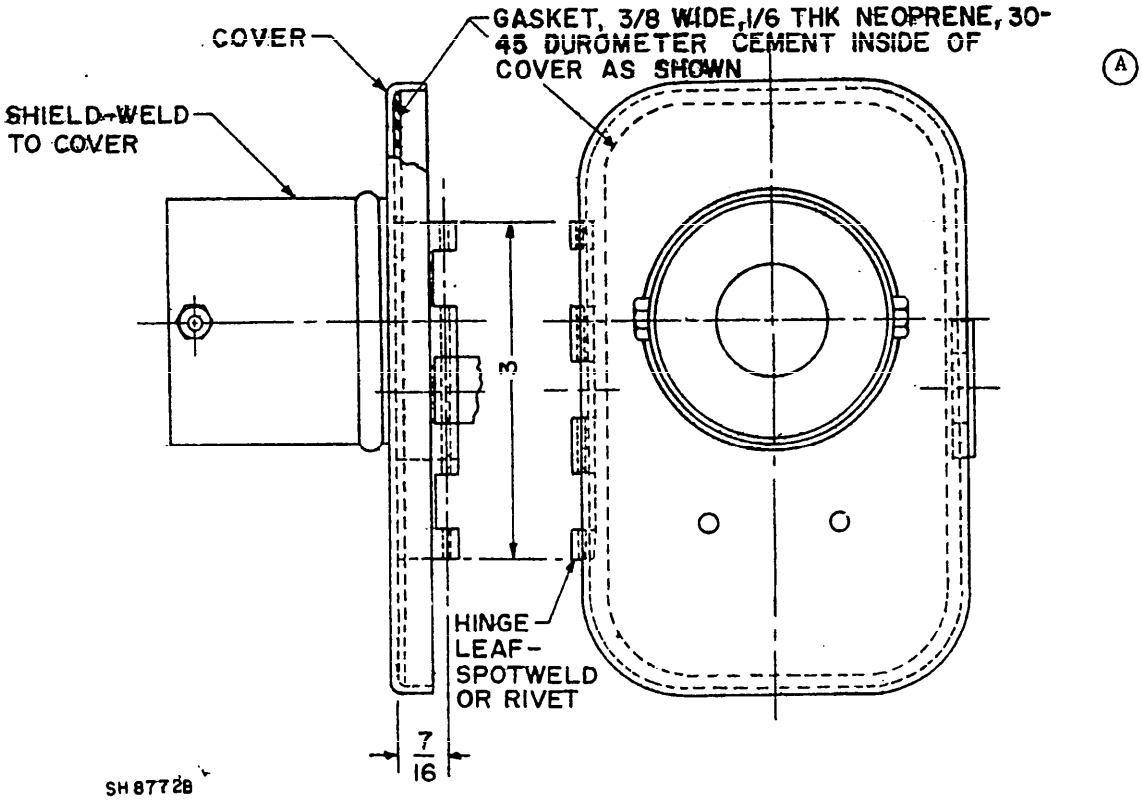


FIGURE 2. Cover assembly.

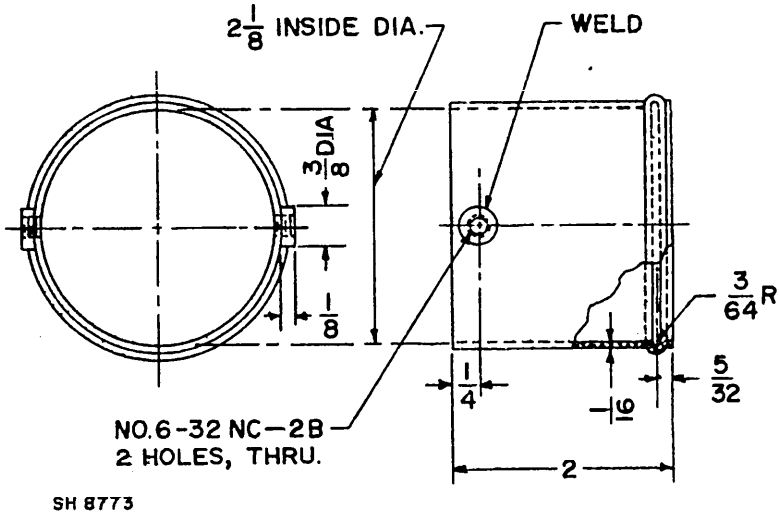


FIGURE 3. Shield assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.

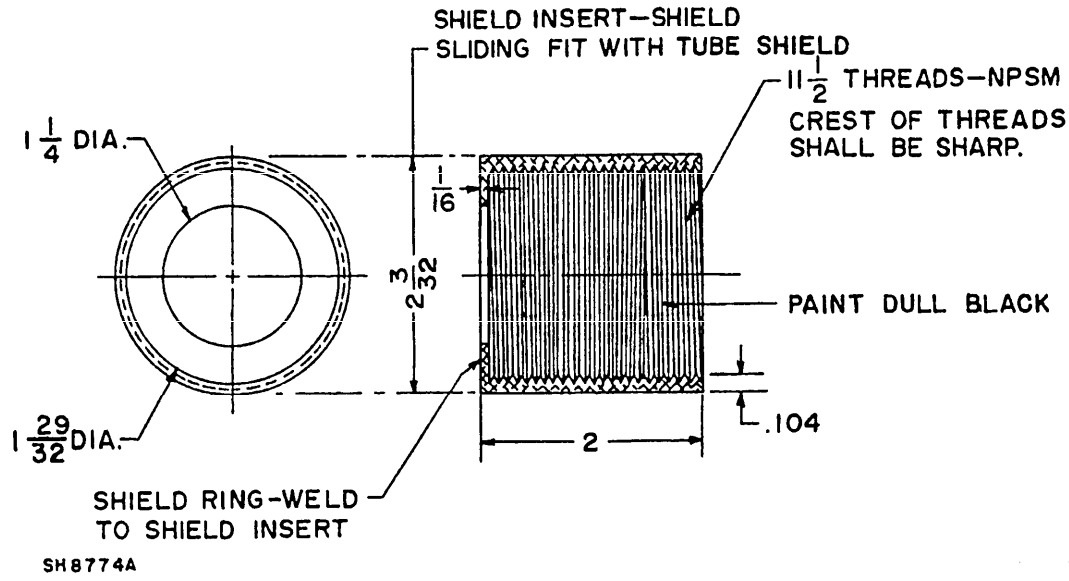


FIGURE 5 Shield insert.

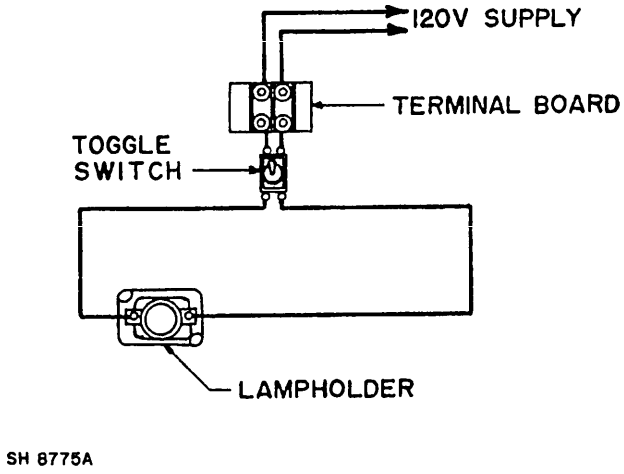


FIGURE 6. Wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.

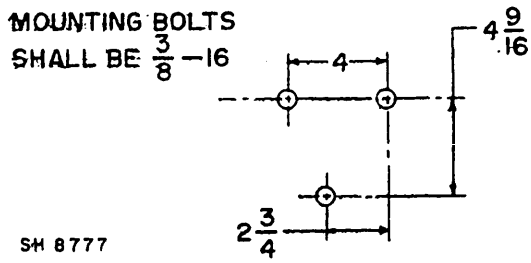


FIGURE 6. Mounting dimensions.

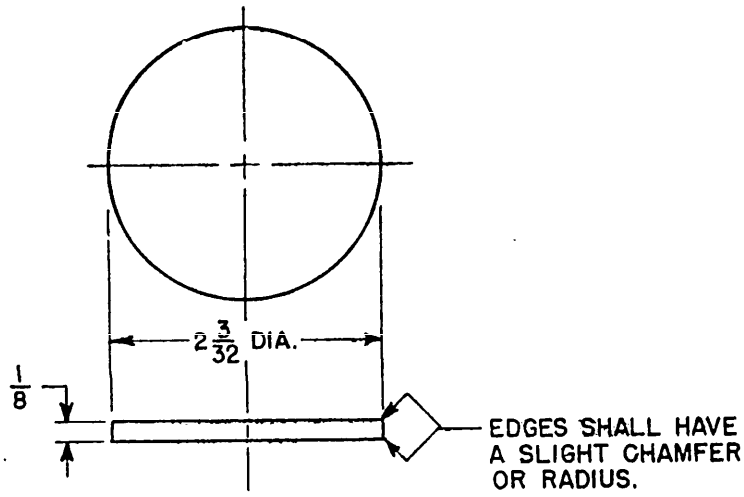


FIGURE 7. Window (filter).

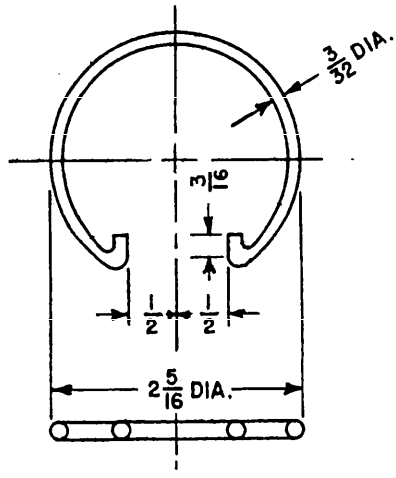


FIGURE 8. Retaining ring

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Type: II

Class: 1

Symbol 147.2: Light, detail, for use with 6-watt, 15-watt, or 25-watt, clear (white) lamps for use in white, red and blue illumination.

Design:

Electrical rating: 120 volts, 6, 15, or 25 watts.
Dimensions and configuration: See figures 1, 2, 3, 4, 6, and 7.
Enclosure, including cover assembly, box assembly, shield assembly, and shield insert assembly: Aluminum. Interior surfaces of enclosure shall be baked white enamel. Interior surfaces of shield assembly and shield insert assembly shall be painted dull black.
Shockmounts: MIL-F-16377/41-010.
Weight: 1 pound, 4 ounces maximum.
Hinge: Aluminum.
Fastener, quick opening: Size to suit. Dzus Manufacturing Company Incorporated, or equal.
Lampholder mounting bracket: Steel, zinc plated.
Lampholder: MIL-L-970/1.
Switch: Toggle DPST, MS16569-1.
Wiring diagram: See figure 5.
Terminal board: Commercial type.
Window (filter), red: See figure 7. Material shall be red transparent plastic sheet, type RTPS-1 of MIL-P-24191.
Window (filter), blue: See figure 7. Material shall be blue transparent plastic sheet, type BTPS-1 of MIL-P-24191.
Retaining ring: See figure 8. Material shall be spring steel.
Set screw: Corrosion resistant steel.
Lamp: These fixtures shall be designed to accommodate the following lamps (lamps are not furnished):
(a) 6-watt conforming to MS15579-4, Industry number 6S6(120).
(b) 15-watt conforming to MS15574-1, Industry number 15T7C.
(c) 25-watt conforming to MS15546, Industry number 25T8C.

Label: Labels shall be furnished in accordance with MIL-F-16377. One type IV label shall be applied as shown on figure 1. The information to be shown on the type IV label shall be:

"INSTALL THE FOLLOWING LAMPS ONLY:
6-WATT: NSN6240-00-143-3049
15-WATT: NSN6240-00-617-1719
25-WATT: NSN6240-00-143-3057"

QUALITY ASSURANCE:

Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection: See table I
Quality conformance:
Comparison inspection: Same as the first article inspection
Inspection of product for delivery:
Examination: See MIL-F-16377
Examination for preparation of delivery: See MIL-F-16377
Quality conformance tests: See MIL-F-16377

TABLE I. First article and comparison inspection for complete fixtures.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Enclosure effectiveness	3.5.11	4.8.14	Totally enclosed
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Continuity of grounding	3.6.13.4	4.8.12	
Magnetic permeability	3.4.8	4.8.18	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.

General information:
(a) Assignment of Military part numbers and general information is shown in table II.
(b) Retaining ring and red and blue window (filter) shall not be installed in the light. They shall be furnished with the light in a bag.

TABLE II. Part number and general information.

Military Part number M16377/31-	Item name	National Stock Number (NSN)	Supersedes 1/ part number
147.2	Complete fixture, Symbol 147.2	6210-00-284-0480	2/ MS17225-147.2
001	Red filter	6210-00-299-6296	MS17153-17
002	Blue filter		New

1/ Part number MS17225-147.3 of MS17225 is superseded by use of Part Number M16377/31-147.2 and red filter M16377/31-001.

2/ Formerly covered on Drawing 9000-86401-73820.

Preparing activity:
Navy - SH
(Project 6210-N579)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.