MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING; INCANDESCENT, DETAIL LIGHTING FOR SIGHTGLASSES

6 WATTS, 120 VOLTS, WATERTIGHT, SYMBOLS 136.1 and 156

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SH).

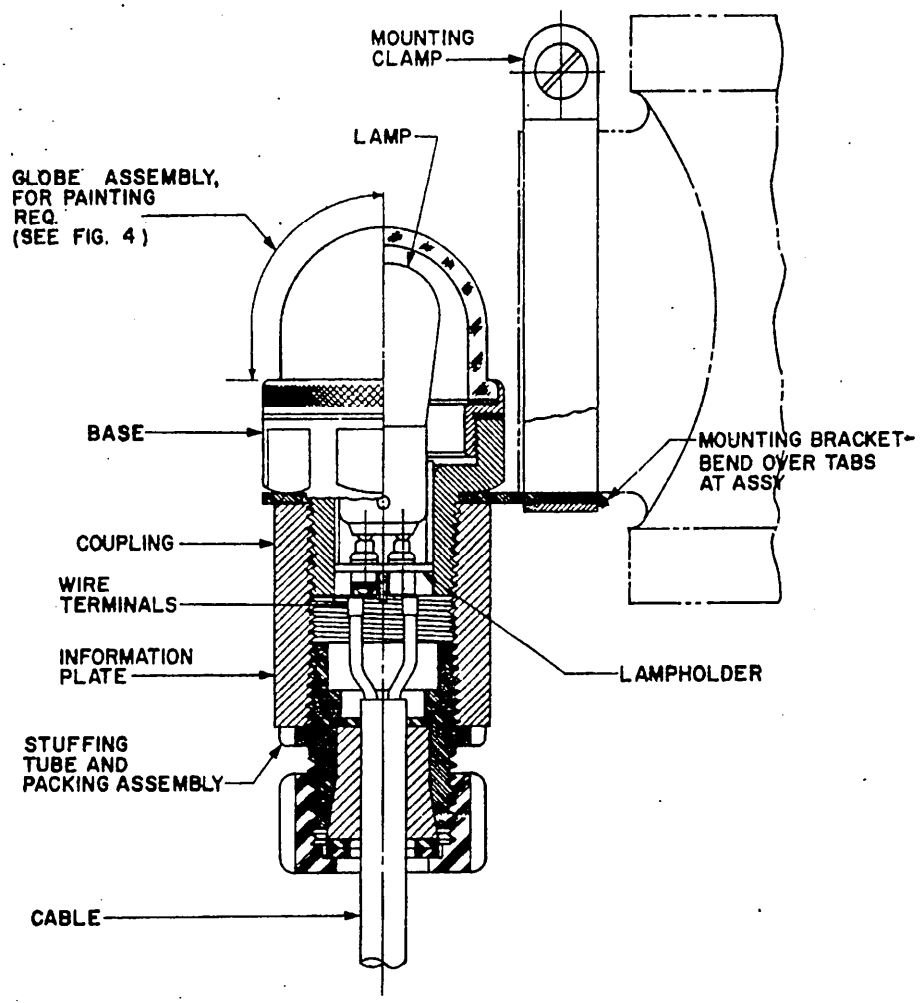


FIGURE 1. Typical view of Symbols 136.1 and 156.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

(A) denotes changes.

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.

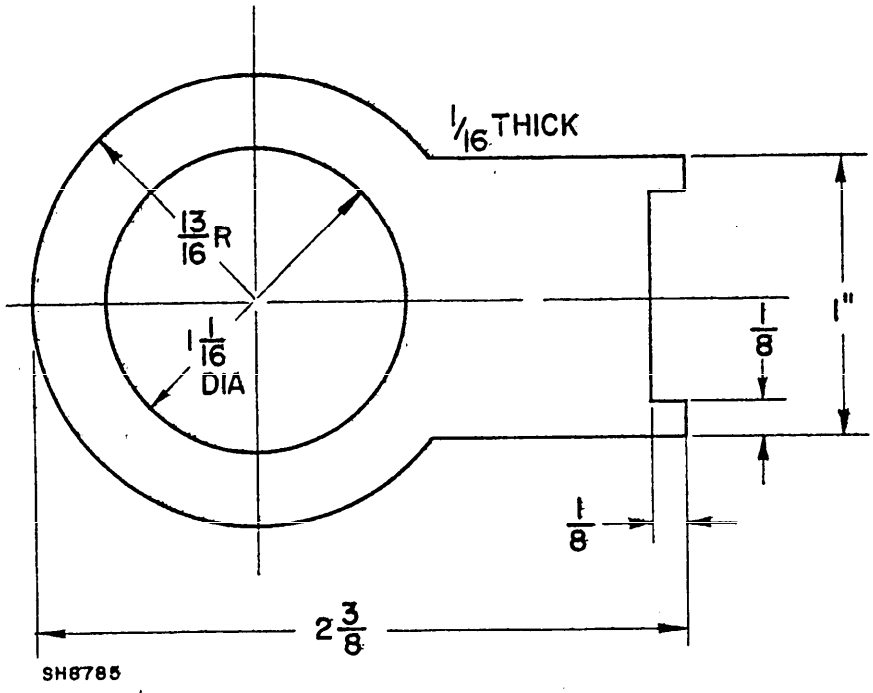


FIGURE 2. Mounting bracket.



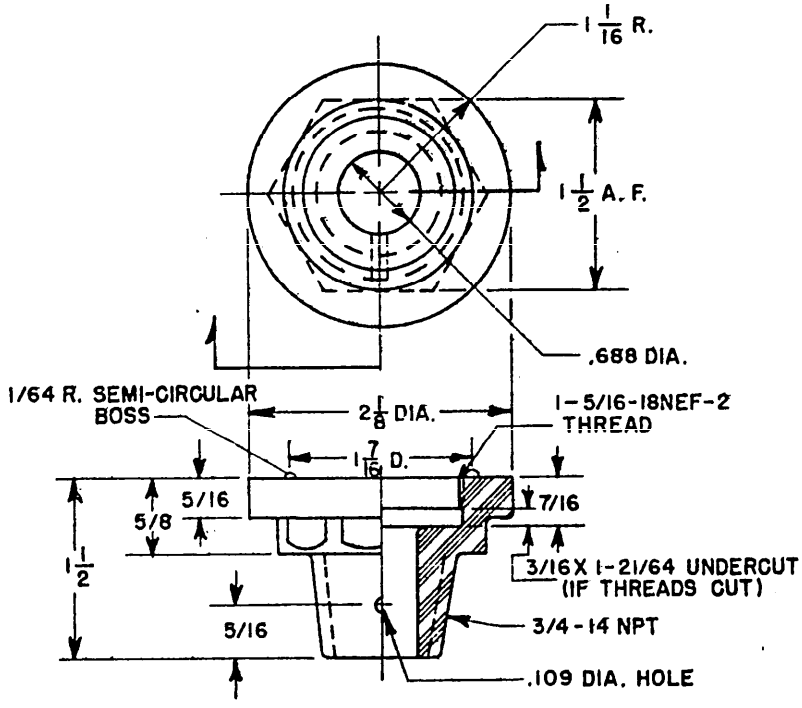


FIGURE 3. Base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.

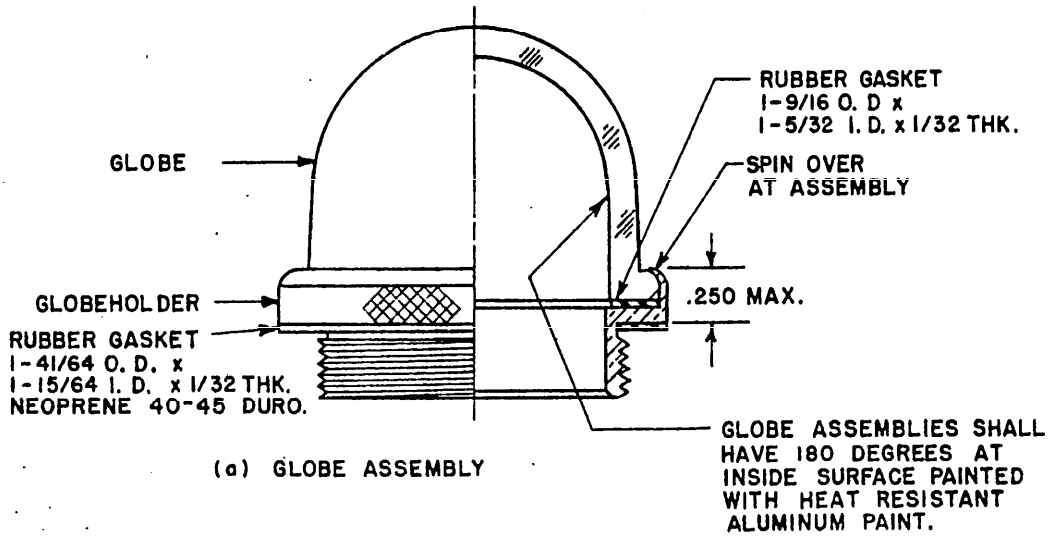


(a) GLOBE ASSEMBLY

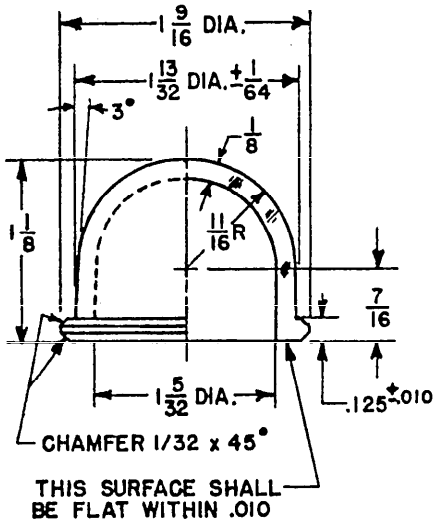

MATERIAL - TEMPERED GLASS
COLOR:
FOR SYMBOL 136.1 - CLEAR TRANSPARENT
FOR SYMBOL 156 - RED TRANSPARENT
TRANSMITTANCE (SYMBOL 136.1):
CLEAR TRANSPARENT - 85 PERCENT MINIMUM

(b) GLOBE, GLASS

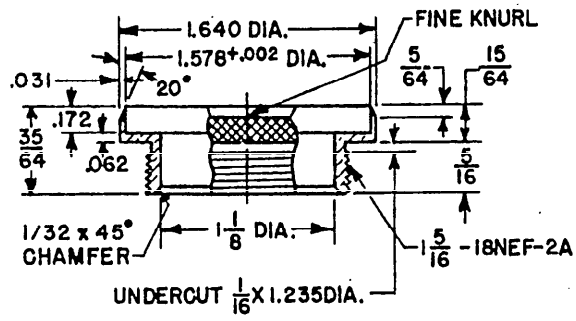

MATERIAL - BRASS

(c) GLOBE HOLDER

SHI0041A

FIGURE 4. Globe.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Type: II
Class: 1
Symbol 136.1: Light for sightglasses, with clear transparent globe assembly, for use with one 6-watt 120-volt, white (clear) incandescent lamp.
Symbol 156: Light for sightglasses, with red transparent globe assembly, for use with one 120-volt 6-watt white (clear) incandescent lamp.
Design:
Electrical rating: 120 volts, 6 watts.
Dimensions and configuration: See figures 1, through 4.
Mounting bracket: Brass, or corrosion resistant steel. See figure 2.
Mounting clamp: Steel, zinc plated, or corrosion resistant steel, size 2-1/4 to 3-1/4 inside diameter. Marman Catalog No. 824, or equal.
Base: Alkyd resin, color gray. See figure 3.
Coupling: 3/4 inch iron pipe size, polyvinylchloride material.
Stuffing tube: Size 2, MIL-S-19622/3-002.
Packing assembly: Size 2, MIL-S-19622/17-01.
Globe assembly:
Symbol 136.1: Clear transparent. See figure 4.
Symbol 156: Red transparent. See figure 4.
Lampholder: MIL-L-970/2, two contact.
Cable: 10 feet of type SO, AWG size 18, two conductor, conforming to J-C-580.
Wire terminals: U.L. approved, insulated crimp type.
Lamp: Lights shall be designed to accommodate a 6-watt, 120-volt, incandescent lamp conforming to MS15567, Industry number 6S6DC(120). (Lamp is not furnished.)
Weight: 1 pound, 4 ounces, max.
Information plate: Brass, or corrosion resistant steel, permanently mounted where shown on figure 1. Legend, in 1/8 inch characters, shall be as follows:

"INSTALL 6-WATT LAMP ONLY
LAMP: NSN6240-00-143-3060
MIL-F-16377/33 REV___"
(Insert revision letter of document)

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection:	
Complete fixtures:	See table I
Globes:	See table II
Quality conformance:	
Comparison inspection:	Same as the first article inspection
Inspection of product for delivery:	
Examination:	See MIL-F-16377
Examination for preparation of delivery:	See MIL-F-16377
Quality conformance tests:	See MIL-F-16377

TABLE I. First article and comparison inspection for complete fixtures.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Enclosure effectiveness	3.5.11	4.8.14	Watertight
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Enclosure effectiveness	3.5.11	4.8.14	Watertight
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Optical uniformity	3.7.4.1.1	4.8.4	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.

TABLE I. First article and comparison inspection for complete fixtures (Cont'd).

Tests	Requirement paragraph	Test paragraph	Remarks
Color and luminous transmittance	3.7.3.1	4.8.6.3	
Paint removal	3.7.5.5	4.8.17.2	
Mechanical shock	3.7.5.6	4.8.17.3	6 ft-lbs
Thermal shock	3.7.5.7	4.8.17.4	
Breakage pattern	3.7.5.9	4.8.17.6	
Magnetic permeability	3.4.8	4.8.18	

TABLE II. First article and comparison inspection for globes.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Optical uniformity	3.7.5.1	4.8.4	
Color and luminous transmittance	3.7.3.1	4.8.6.3	
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Enclosure effectiveness	3.5.11	4.8.14	Watertight
Paint removal	3.7.5.5	4.8.17.2	
Mechanical shock	3.7.5.6	4.8.17.3	6 ft-lbs
Thermal shock	3.7.5.7	4.8.17.4	
Breakage pattern	3.7.5.9	4.8.17.6	

General information: Assignment of Military part numbers and general information shall be as shown in table III.

TABLE III. - Part numbers and general information.

Military Part numbers M16377/33-	Item name	National Stock Number (NSN)	Supersedes part number
136.1	Complete fixture, Symbol 136.1	6210-00-790-4846	1/ MS17274-1
156	Complete fixture, Symbol 156	6210-00-790-4847	1/ MS17274-2
001	Globe assembly, clear		
002	Globe assembly, red		

1/ Formerly covered on Drawing 815-1197017.

Preparing activity:
Navy - SH
(Project 6210-N581)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.