MIL-F-16377/38A(SH)
9 May 1983
SUPERSEDING
MIL-F-16377/38(SHIPS)
30 November 1970

MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING; INCANDESCENT, DETAIL LIGHTING FOR HULL NUMERALS

(A) 100 WATTS, 120 VOLTS, WATERTIGHT, SYMBOL 304

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SH).

(A)

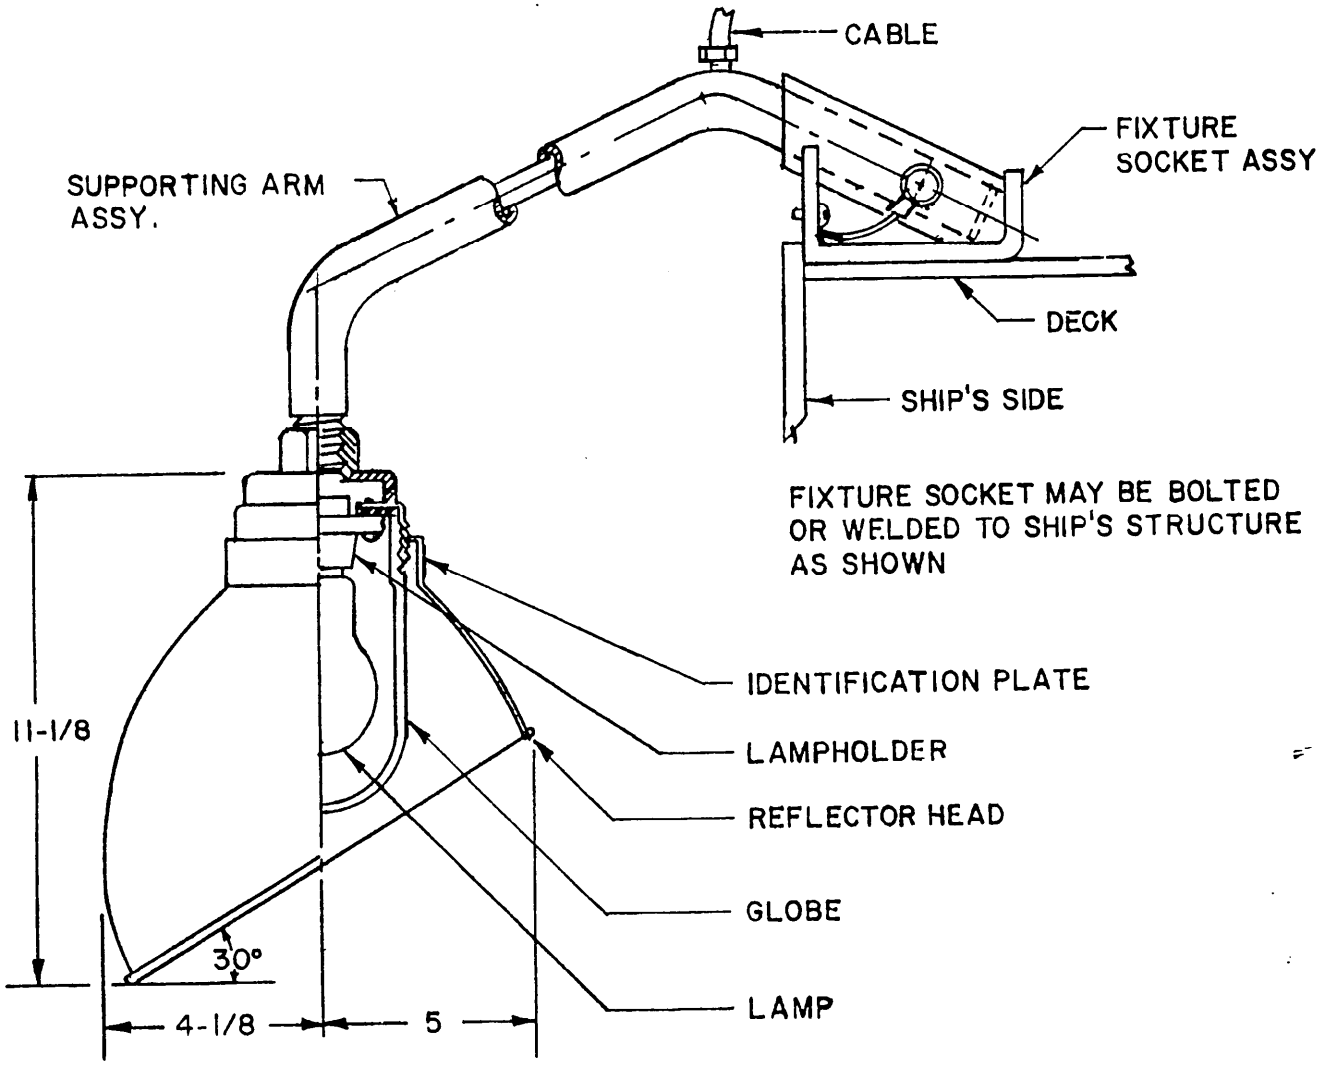



FIGURE 1. Typical view of Symbol 304.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.


(A) denotes changes.

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

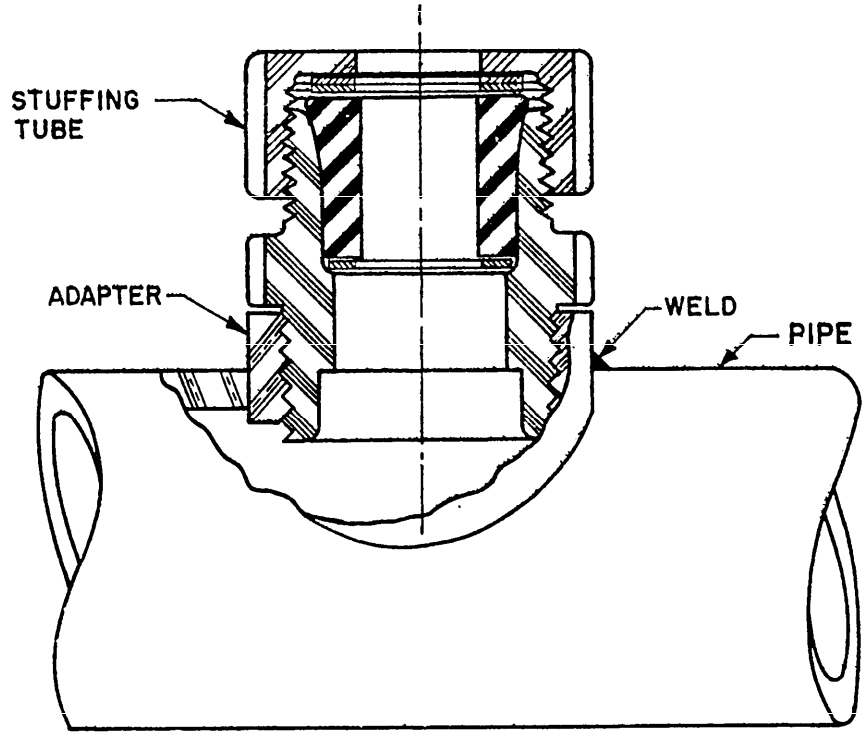

SH 10051 VIEW A

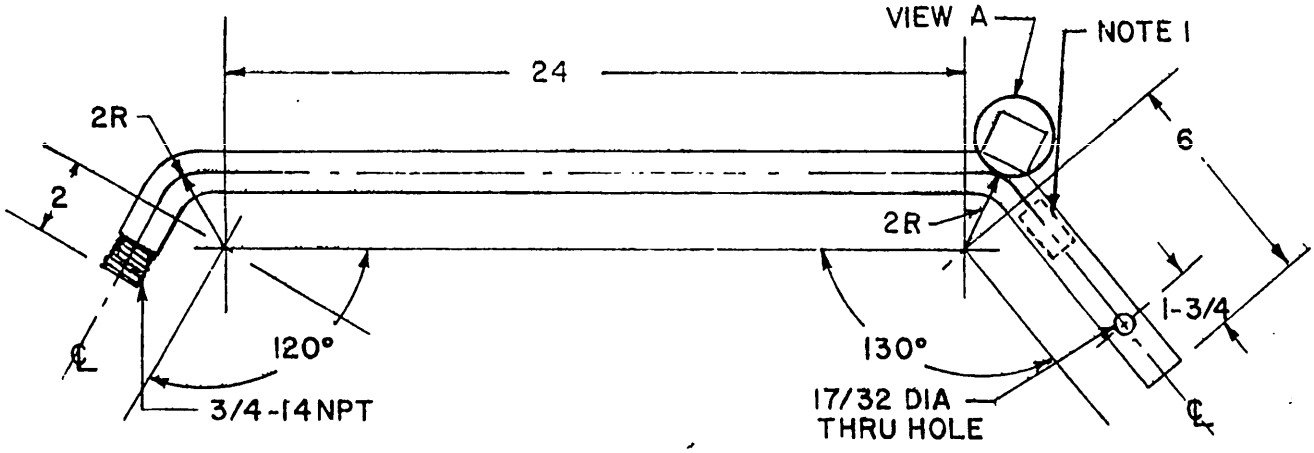


NOTES:

1. 4 inches from end press and cement-in a rubber stopper to seal tube end - watertight.
2. Material for pipe shall be 3/4 inch corrosion resistant steel seamless tubing, schedule 40, Type 304, 1.050 O. D., 0.937 I. D.

FIGURE 2. Supporting arm assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

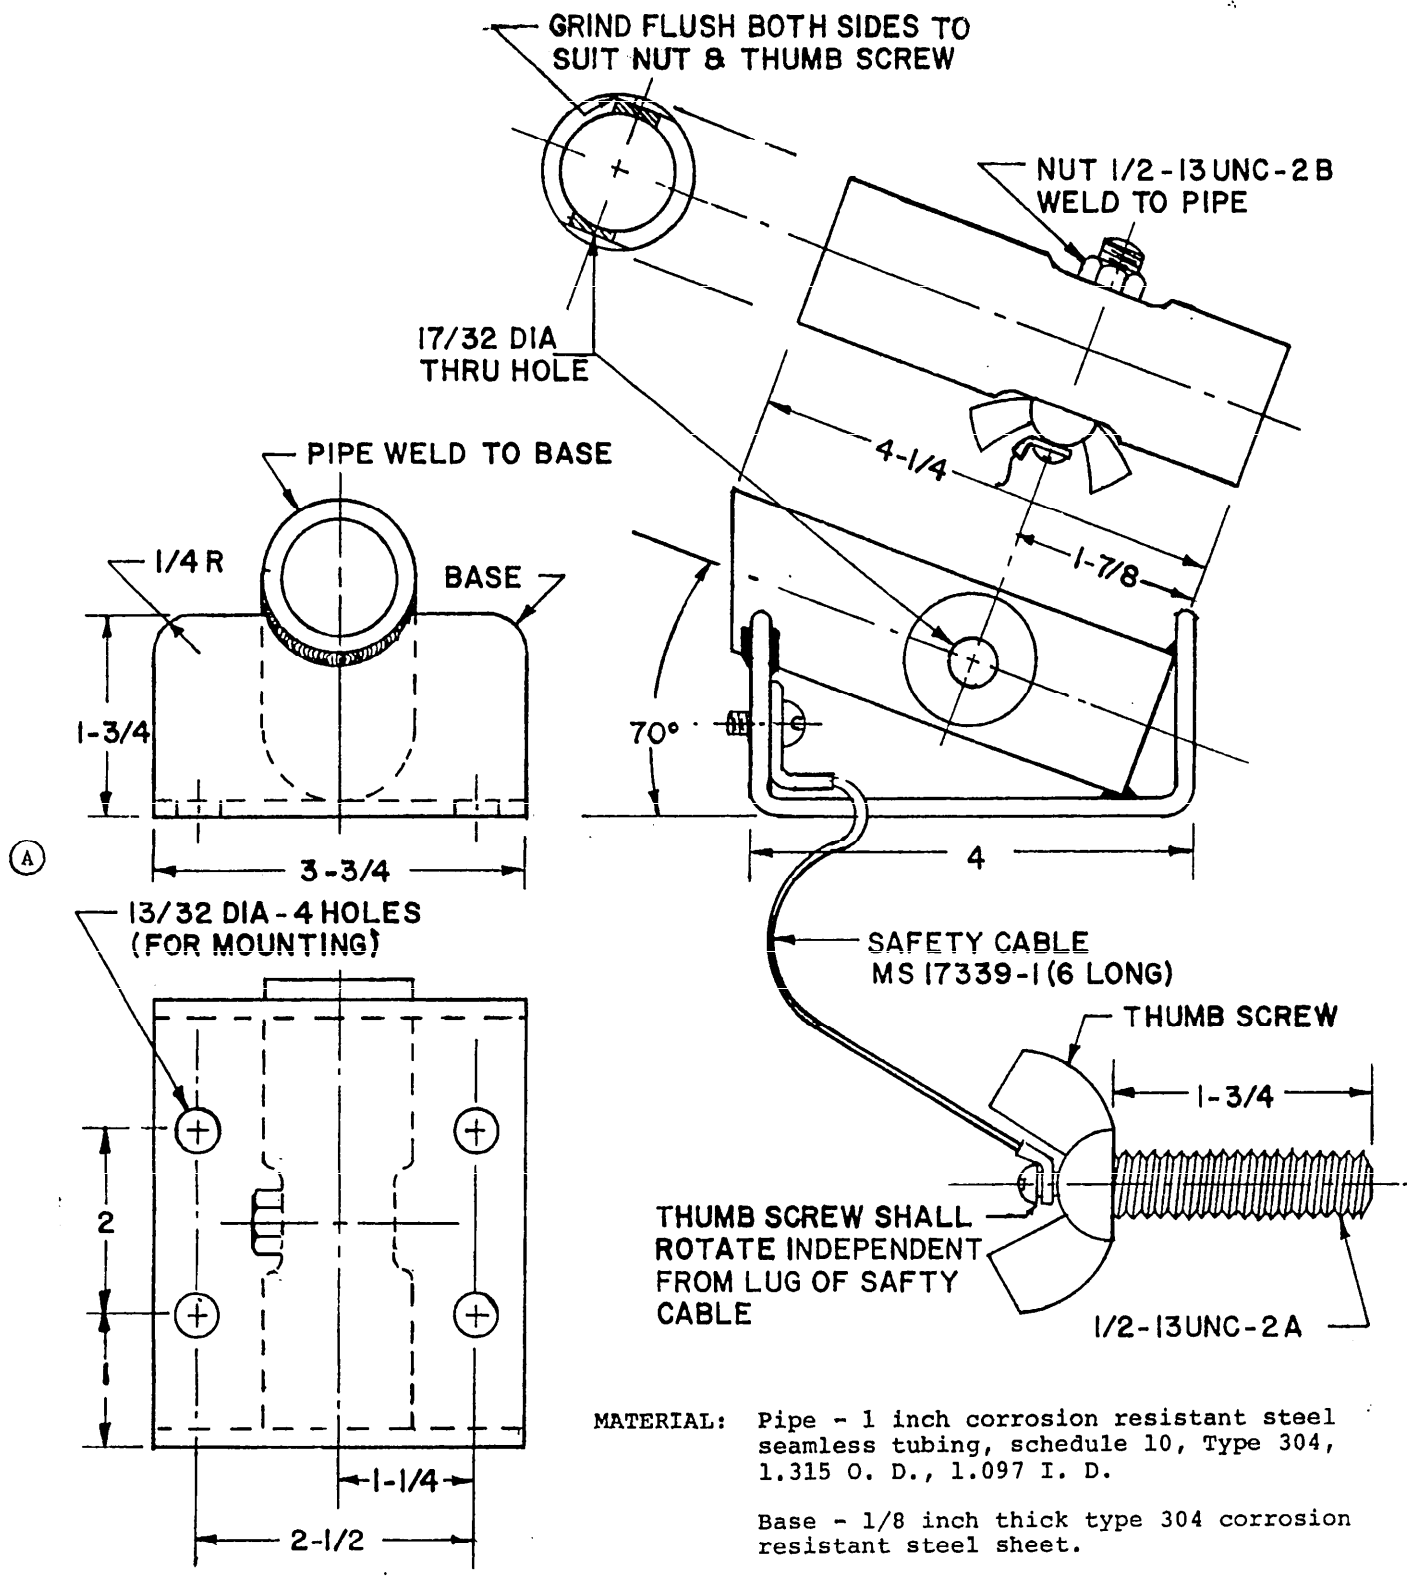


MATERIAL: Pipe - 1 inch corrosion resistant steel seamless tubing, schedule 10, Type 304, 1.315 O. D., 1.097 I. D.

Base - 1/8 inch thick type 304 corrosion resistant steel sheet.

FIGURE 3. Fixture socket assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

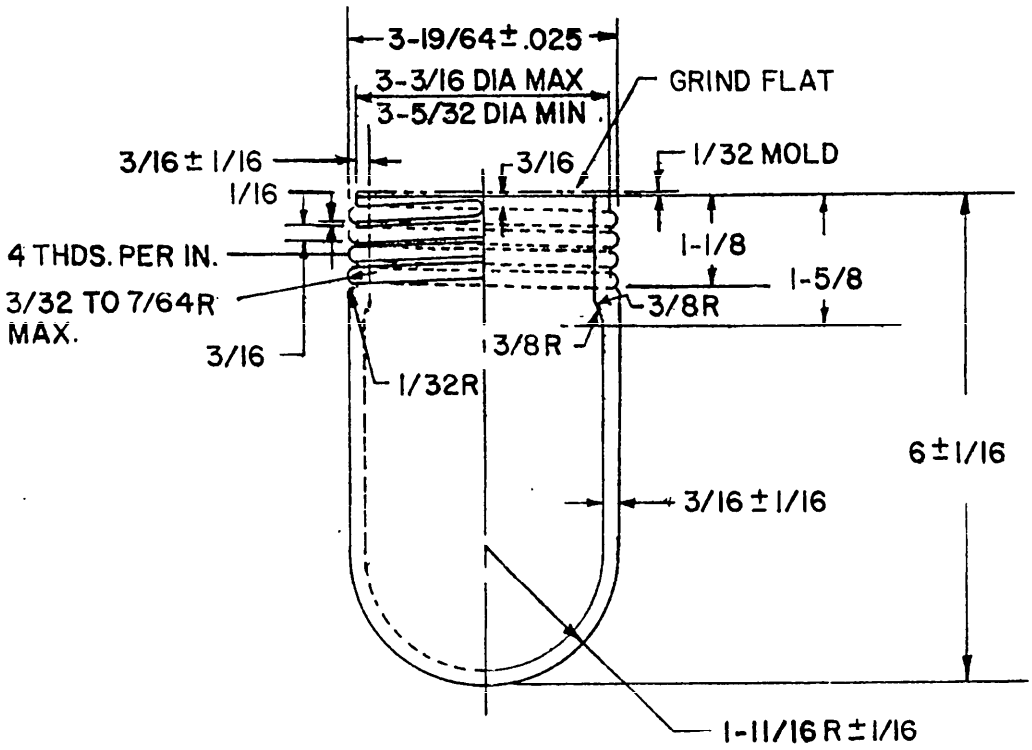

MATERIAL: High-impact, heat-resistant glass
Color: Clear transparent
Light transmittance: 80 percent minimum

FIGURE 4. Globe.

MIL-F-16377/38, SYMBOL 304
NSN 6210-00-505-0166
USE LAMP
NSN 6240-00-824-4676 ONLY
MFR'S NAME _____

Material shall be corrosion Resistant Steel, 0.020 thick. Letters shall be 1/8 inch high filled with black enamel.

FIGURE 5. Identification plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Type: II
Class: 1
Symbol 304: Light for lighting bow and hull numerals for use with one 100-watt, 120 volt, incandescent lamp.
Design:
Electrical rating: 120 volts, 100 watts.
Dimensions and configuration: See figures 1 and 2.
Supporting arm and fixture socket: Galvanized steel. A sealing compound shall be used for watertightness at installation of supporting arm to connection box.
Reflector head and connection box: Commercial type for sign illumination.
Effectiveness of enclosure: Watertight.
Lampholder: MIL-L-970/9.
Cable: 10 feet, type TSS-3 of MIL-C-915/8.
Electrical connections: Electrical connections shall be made watertight.
Grounding lead: Red grounding lead shall be connected to lampholder securing screw and to appropriate connection in the plug or outlet box.
Stuffing tube: Size 2, MIL-S-19622/3-002.
Packing assembly: Size 2, MIL-S-19622/17-04.
Lamp: This fixture shall be designed to accommodate a plastic coated 100-watt, 120-volt incandescent, rough service lamp. Industry number 100A21/RS(plastic coated). Lamp is not furnished.
Finish: The inside surface of the reflector head shall have a white baked enamel finish. Exterior surfaces shall be finished in accordance with MIL-F-16377.

(A) Identification plate: See figure 5.

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection: See table I.
Quality conformance:
Comparison inspection: Same as the first article inspection.
Inspection of product for delivery:
Examination: See MIL-F-16377
Examination for preparation of delivery: See Mil-F-16377
Quality conformance tests: See MIL-F-16377

TABLE I. First article and comparison insepction.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Enclosure effectiveness	3.5.11	4.8.14	Watertight 1/
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Salt spray	3.3.15	4.8.10	
Grounding circuit	3.6.13.3	4.8.11	
Magnetic permeability	3.4.8	4.8.18	

1/ Electrical circuit only.

General information:

(a) Military part number: M16377/38-304.
(b) Superseding 9-S-4675-L, Symbol 304.

Preparing activity:
Navy - SH
(Project 6210-N586)

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:47Z
Check the source to verify that this is the current version before use.