MIL-F-16377/39A(SHIPS)
4 January 1974
SUPERSEDING
MIL-F-16377/39(SHIPS)
30 November 1970

MILITARY SPECIFICATION SHEET

FIXTURE, LIGHT, INCANDESCENT, STREAMER TYPE, DETAIL LIGHTING FOR TOPSIDE SHIP DRESS LIGHTING, WATERTIGHT, 120 VOLTS, 425 WATTS

SYMBOL 307

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the light described herein shall consist of this document and the latest issue of MIL-F-16377.

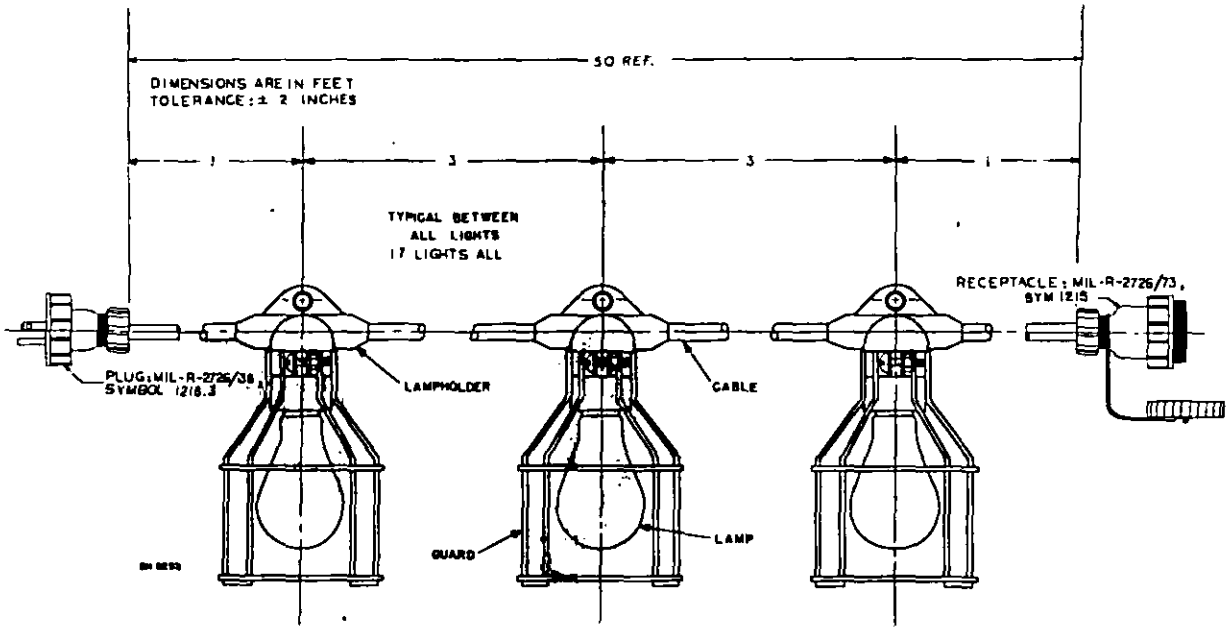


FIGURE 1.-LIGHT STREAMER ASSEMBLY

FSC 6230

(A) Denote changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:48Z
Check the source to verify that this is the current version before use.

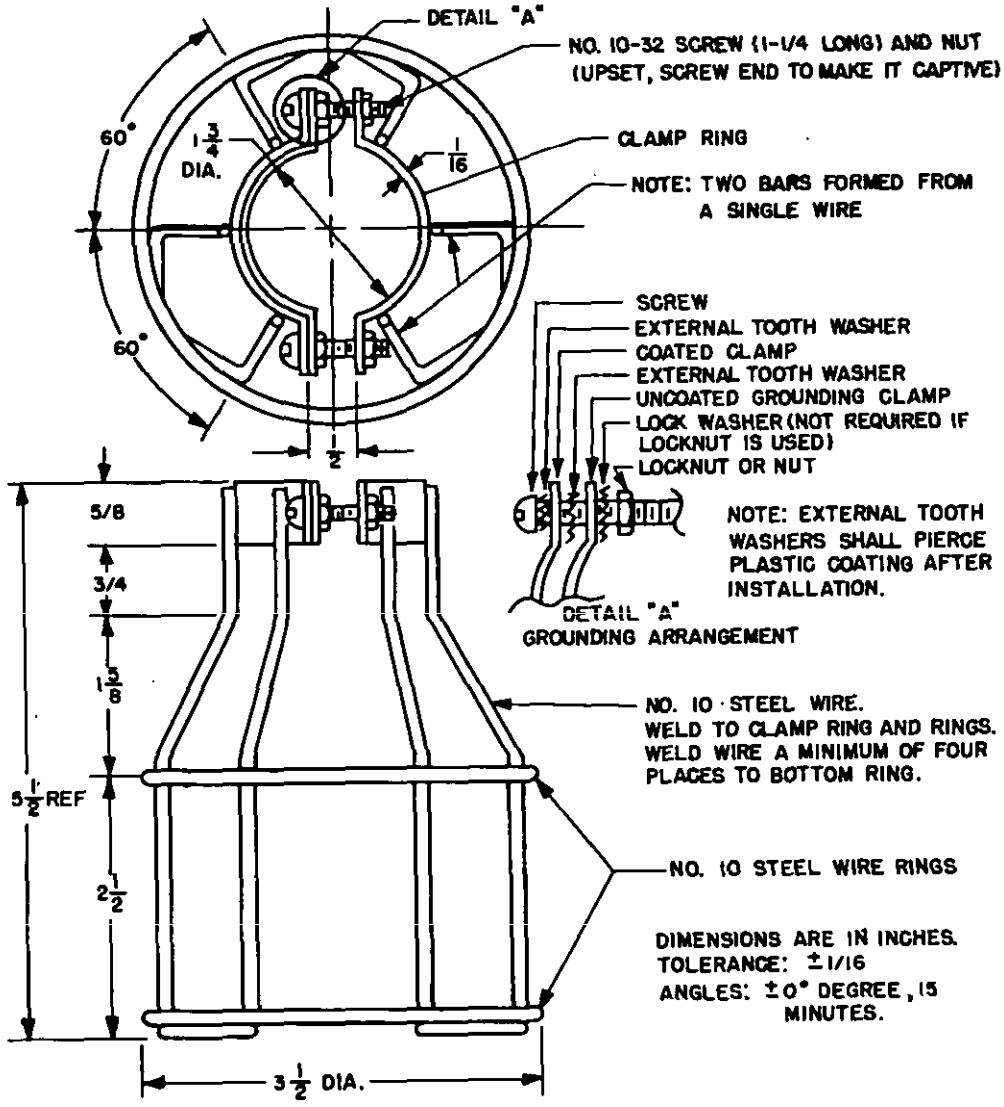


Figure 2 - Guard assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:48Z
Check the source to verify that this is the current version before use.

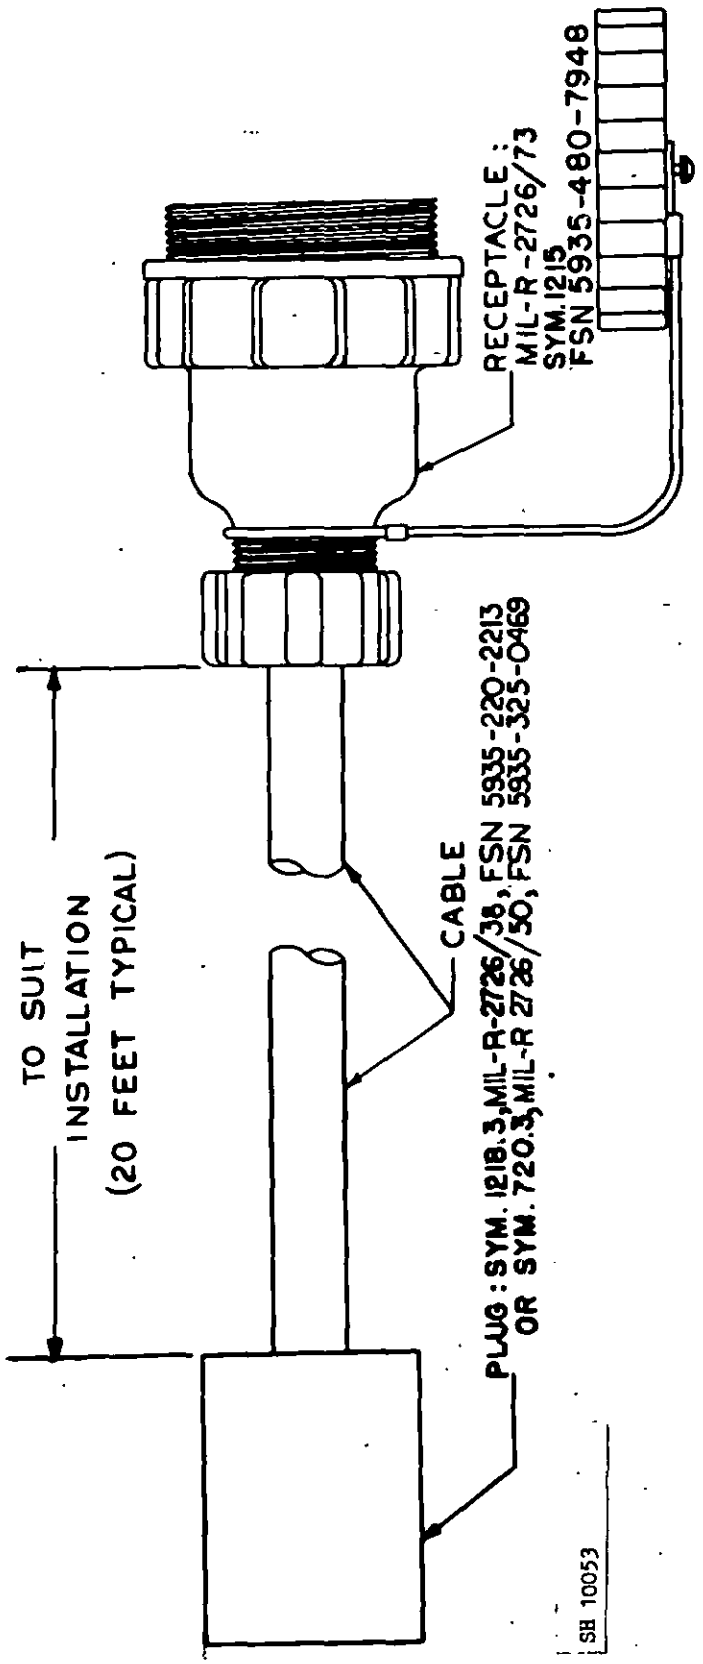


Figure 3 - Extension cable assembly.

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:48Z
Check the source to verify that this is the currentversion before use.



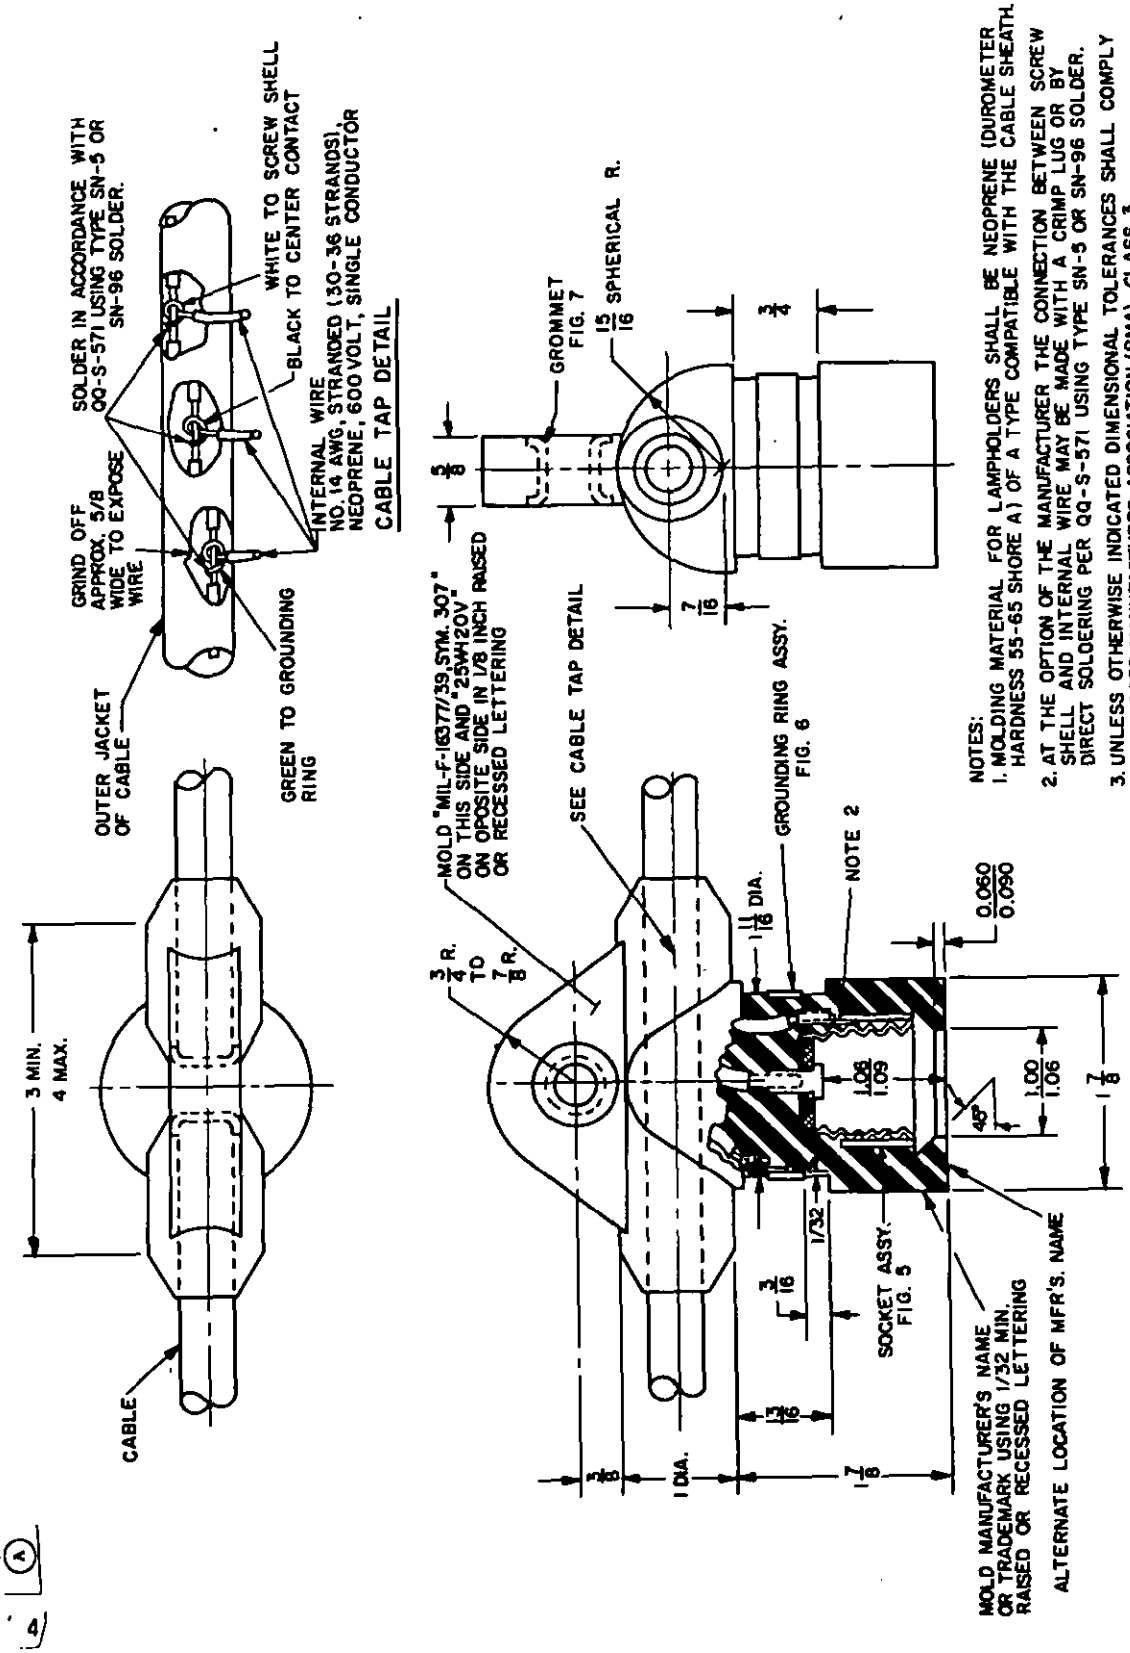


Figure 4 - Lampholder assembly.

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:48Z
Check the source to verify that this is the current version before use.

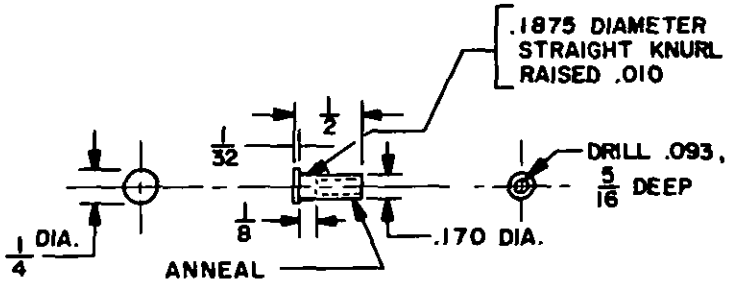


BUTTON CONTACT
BRASS




INSULATOR

LAMINATED PHENOLIC
TYPE FBG OF MIL-P-15035

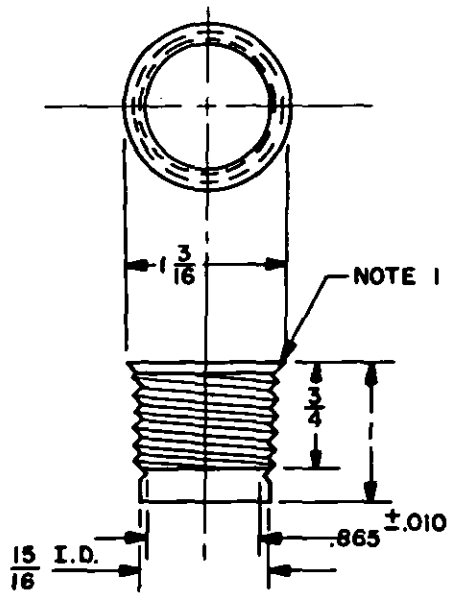

SCREW SHELL


BRASS OR COPPER-
NICKEL PLATED, 0.0125 THK.

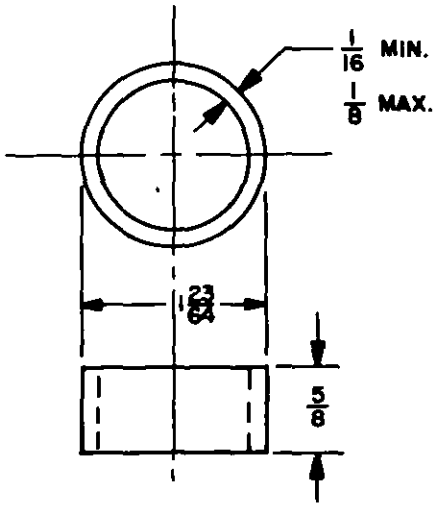

CRUSH STRENGTH SLEEVE
STEEL - TINNED

NOTES:

1. SCREW SHELL SHALL BE MADE FOR ASME STANDARD MEDIUM SCREW LAMP BASE, RIGHT HAND.
2. SCREW SHELL SHALL BE FIRMLY CRIMPED OVER INSULATOR.
3. COMPOSITION OF BRASS SHALL BE SUCH THAT IT IS RESISTANT TO CORROSION CRACKING.

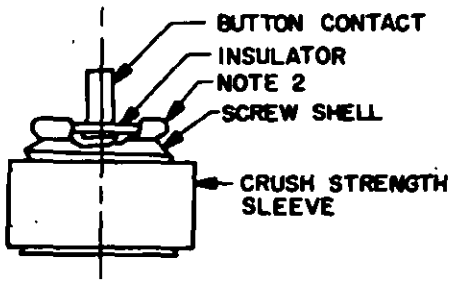

ASSEMBLY

SH 10667

Figure 5 - Socket assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:48Z
Check the source to verify that this is the current version before use.

(A)


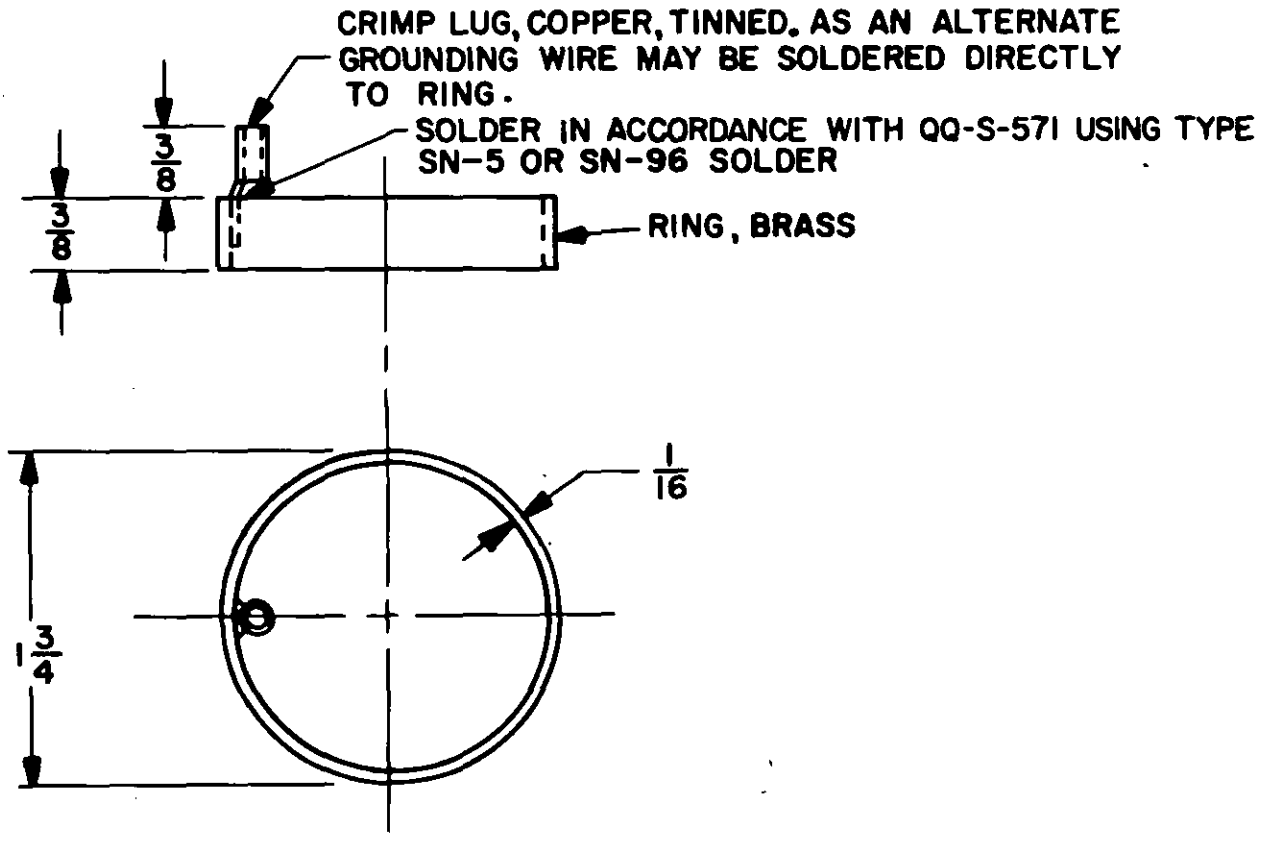


Figure 6 - Grounding ring assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:48Z
Check the source to verify that this is the current version before use.

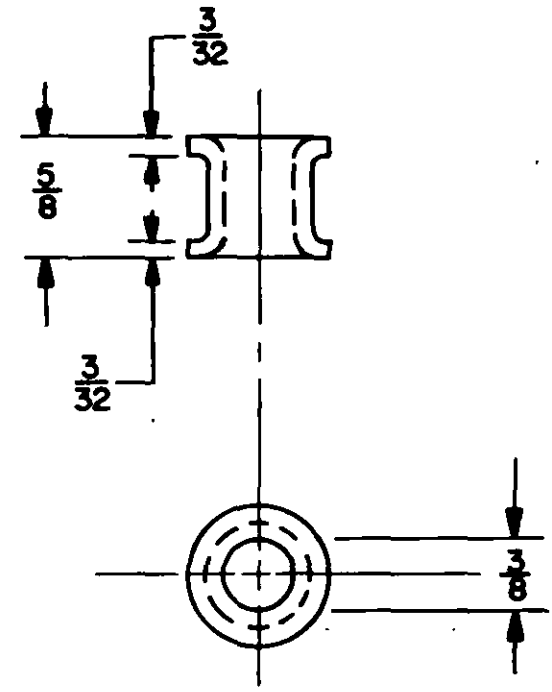

MATERIAL: BRASS

SH 10669

Figure 7 - Grommet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Type: II
Class: 1
Symbol 307: Streamer light for topside ship dress lighting with 17-25 watt, 120 volt incandescent lamps.

Design:

Electrical rating: 120 volts, 425 watts.
Dimensions and configurations: See figures 1 through 7.
Lampholder: Lampholders shall conform to figure 4. Quantity and spacing of lampholders shall be as shown on figure 1.
Cable: Cable shall be type SO, AWG size 14, 3 conductor (white, black, green), in accordance with J-C-580.
Electrical connectors: Electrical plugs and receptacles shall be as shown on figures 1 and 3.
Guard: Guards shall be fabricated from corrosion-resistant materials as shown on figure 2. The guard (excluding the screws, nuts, washers and the grounding clamp) shall be plastic coated. Coating material shall be vinyl plastisol or equal. Color shall be blue. Plastic guards molded of Ultra-Violet (UV) stabilized polycarbonate clear material to the dimensions shown on figure 2 with a snap-on feature which fits tightly over the lampholder neck may be used as an alternate design.
(A) Lamp: Streamer, Symbol 307, shall be designed to accommodate 17 lamps, incandescent, rough service, medium screw, plastic coated, 25 watt, 120 volt, industry number 25A/RS(120), PSN 6240-106-9636. Unless otherwise specified in the contract or order, lamps shall not be furnished.
(A) Weight: Symbol 307 complete - 32 pounds maximum.
Streamer assembly: Streamer assemblies shall be furnished as shown on figure 1.
Extension cable assembly: Unless otherwise specified in the contract or order, extension cable assemblies for energizing the streamers shall not be furnished (see General Information).

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection: See table I.
Quality conformance:
Comparison inspection: Same as the first article inspection
Inspection of product for delivery:
Examination: See MIL-F-16377
Examination for preparation of delivery: See MIL-F-16377
Quality conformance tests: In accordance with MIL-F-16377 and table I less the salt spray test.

Table I - First article and comparison inspection.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Enclosure effectiveness	3.5.11.3	4.8.14.4	Watertight
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Salt spray	3.5.15	4.8.10	
(A) Grounding circuit	3.6.13.3	4.8.11	1/

(A) 1/ Grounding circuit is defined as the circuit between the grounding contact in the plug or receptacle and the grounding ring of the first lampholder adjacent to it and between the grounding rings of successive lampholders.

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:48Z
Check the source to verify that this is the current version before use.

General information:

(a) Extension cable assemblies will be furnished by the installing activity as shown on figure 3 to suit installation.

(b) Military Part Numbers: Assignment of Military Part Numbers and general information is shown in table II.

Table II - Part number and general information.

Military part number M16377/39-	Item name	Federal stock Number (FSN)
307	Complete streamer assembly	----------
001	Streamer assembly without guard assemblies	6230-160-0610
002	Guard assembly	6230-159-2231
003	Extension cable assembly	----------

Preparing activity:
Navy - SH
(Project 6230-N200)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1974 -713-151/3399

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:48Z
Check the source to verify that this is the currentversion before use.