
MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING; LOCKS FLUORESCENT LAMP

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SH).

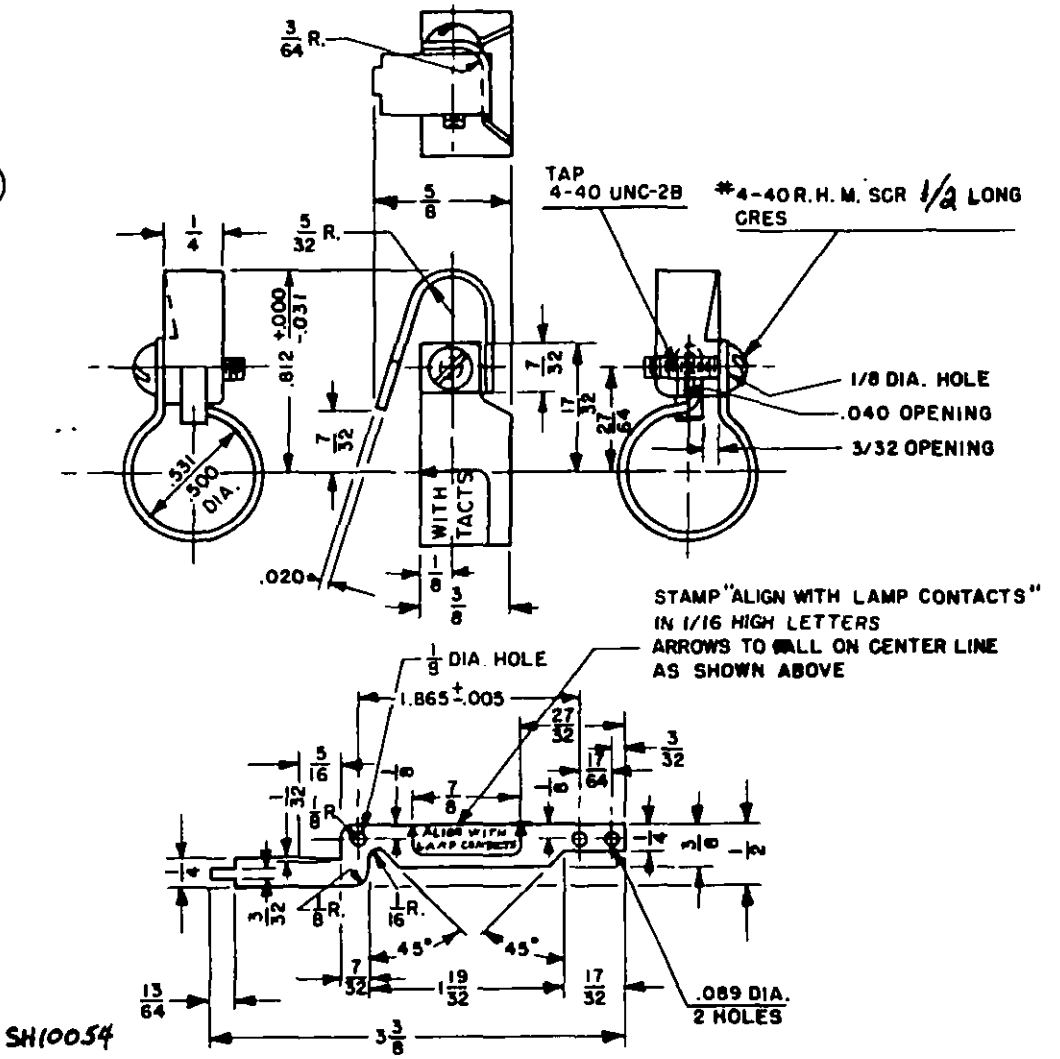


Part Number: M16377/40-001
National Stock Number: 6250-00-399-7039

FIGURE 1. Lock assembly for one 6 or 8 watt fluorescent lamp, T-5.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

(A) Denotes changes



FSC 6250

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:48Z
Check the source to verify that this is the current version before use.

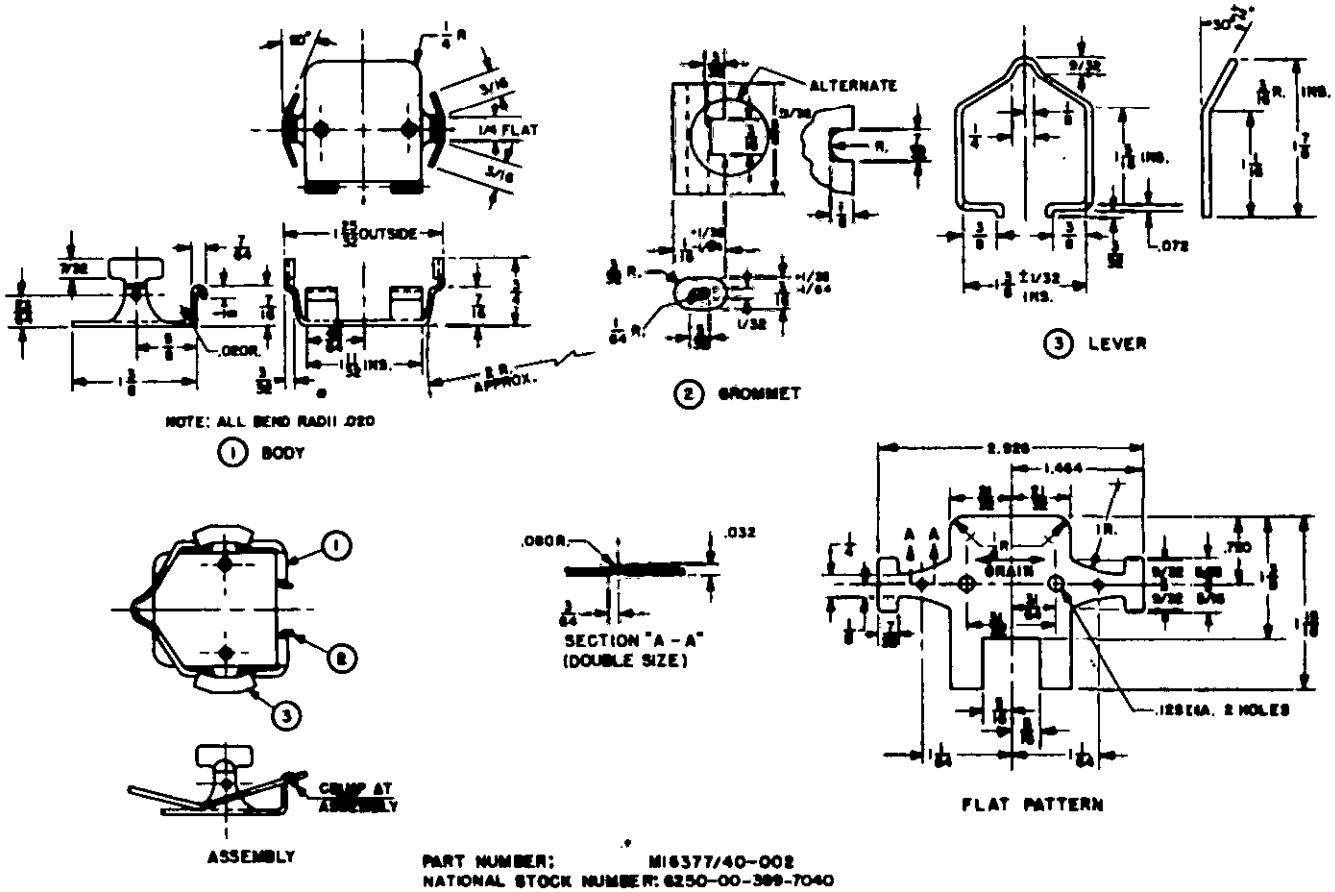



FIGURE 2. Lock assembly for one 15 or 20 watt fluorescent lamp, T-12.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:

Dimensions and configurations: See figures 1 and 2. All dimensions are in inches.
Material:
Part Number M16377/40-001: Phosphor bronze, Commercial hard.
Part Number M16377/40-002:
(A) Body - Phosphor bronze Commercial Hard; thickness: 0.020; gage: 24
Lever - Phosphor bronze, spring wire; diameter: 0.072.
Grommet - Tubing, neoprene (40-50 Durometer).
Finish: Zinc or nickel plate (finish is optional).

QUALITY ASSURANCE

Quality assurance shall be as specified in MIL-F-16377 and as follows:

| | |
|---|---|
| First article inspection: | See table I |
| Quality conformance: | |
| Comparison inspection: | Same as the first article inspection |
| Inspection of product for delivery: | |
| Examination: | See MIL-F-16377 |
| Examination for preparation of delivery: | See MIL-F-16377 |
| Quality conformance tests: | None required |

TABLE I. First article and comparison inspection.

| Tests | Requirement paragraph | Test paragraph | Remarks |
|---|---|---|---|
| Examination | 3.13 | 4.5 | |
| Shock | 3.5.12 | 4.8.7 | 1/ |
| Vibration | 3.5.13 | 4.8.8 | 1/ |

1/ Four locks each, part numbers M16377/40-001, and M16377/40-002, shall be installed in a fixture of design in accordance with MIL-F-16377/7 and MIL-F-16377/11, respectively.

GENERAL INFORMATION:

(a) The locks described herein are intended for use with the fluorescent lighting fixtures to prevent the fluorescent lamps from becoming loose under the severe shock and vibration conditions encountered aboard Navy Ships.
(b) The locks specified herein were formerly covered on NAVSHIPS Drawing 9000-S6401-73939 and MS 16565.
(c) Military part numbers and National Stock Numbers are as shown in figures 1 and 2.

Preparing activity:
Navy - SH
(Project 6250-N158)



Source: https://assist.dla.mil -- Downloaded: 202610-18T08:48Z
Check the source to verify that this is the current version before use.