INCH-POUND

MIL-DTL-16377/40B(SH)
18 December 2008

SUPERSEDING
MIL-F-16377/40A(SH)
29 July 1981

DETAIL SPECIFICATION SHEET

FIXTURES, LIGHTING; LOCKS FLUORESCENT LAMP

This specification is approved for use by the Naval Sea Systems Command and is available for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-16377.

All dimensions in inches. For tolerances, other than specified herein, see 3.5.2 of MIL-DTL-16377.

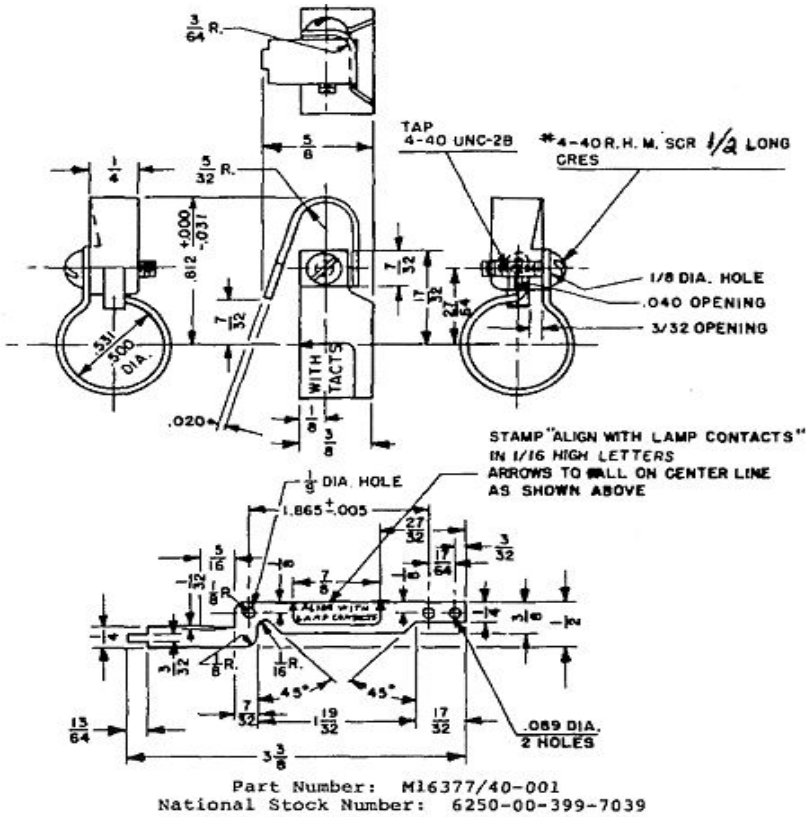


FIGURE 1. Lock assembly for one 6- or 8-watt T5 fluorescent lamp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:48Z
Check the source to verify that this is the current version before use.

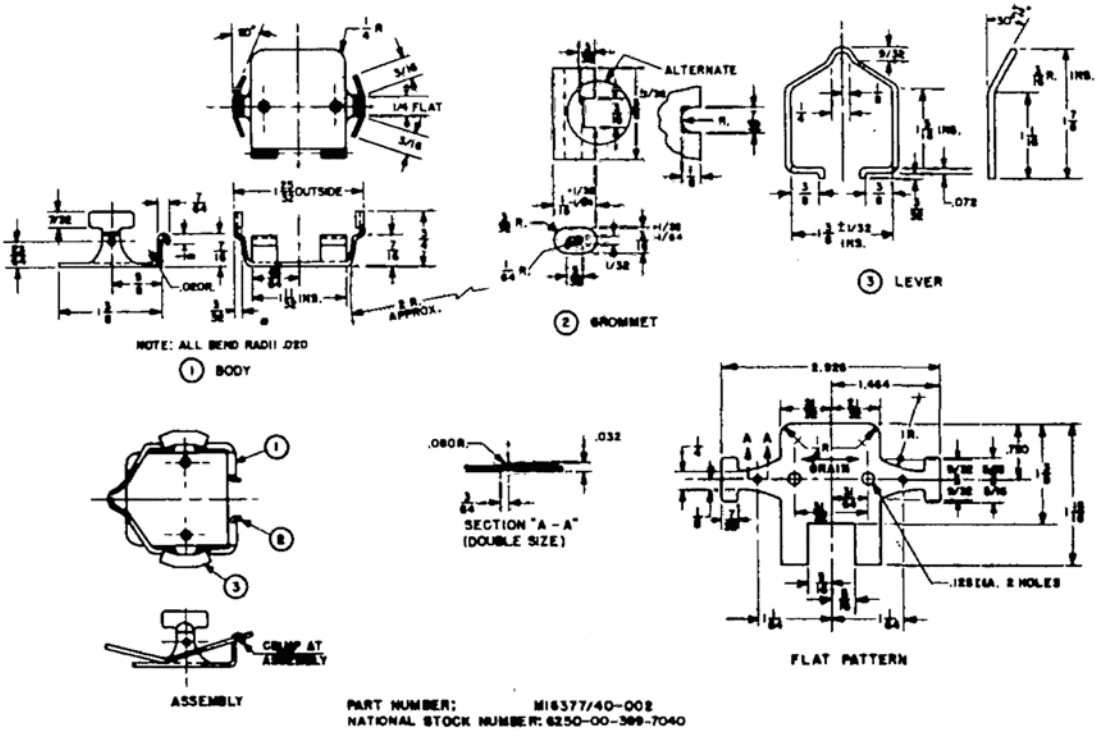


FIGURE 2. Lock assembly for one 15-, 17-, or 20-watt T12 fluorescent lamp.

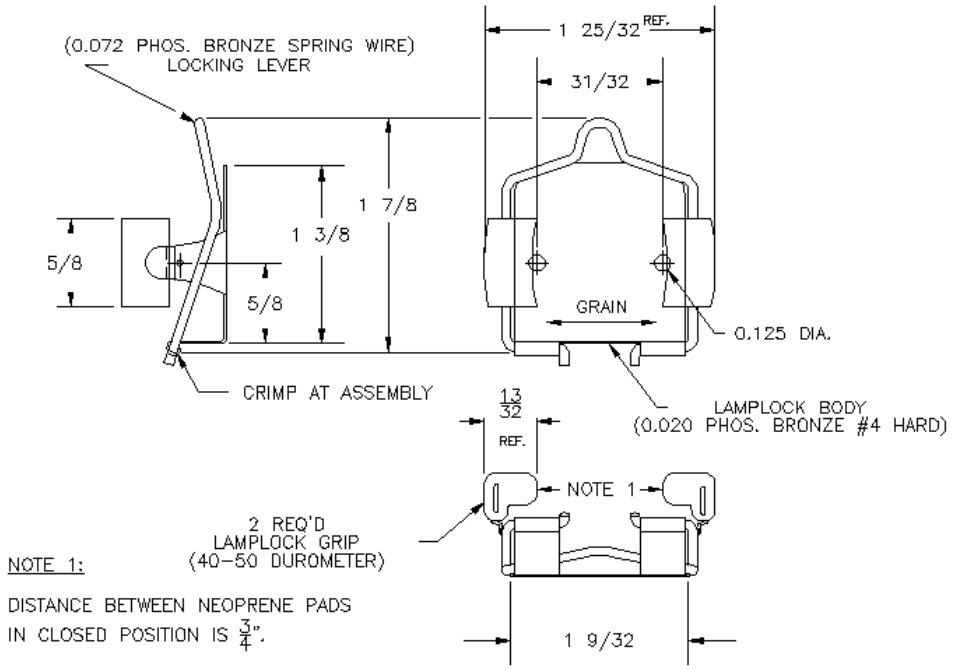


FIGURE 3. Lock assembly for one 17-watt T8 fluorescent lamp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:

Dimensions and configurations	See figures 1, 2, and 3.
Material:	
T5 lamp lock assembly	Phosphor bronze, commercial hard.
T12 lamp lock assembly	
Body	Phosphor bronze commercial hard; thickness: 0.020; gage: 24.
Lever	Phosphor bronze, spring wire; diameter: 0.072.
Grommet	Tubing, neoprene (40-50 durometer).
Finish	Zinc or nickel plate (finish is optional).
T8 lamp lock assembly	See figure 3.

EXAMINATIONS AND TESTS:

Examinations and tests shall be as specified in MIL-DTL-16377 and the following:

First article testing/inspection	See table II.
Comparison inspection	See table II.
Conformance inspection	See MIL-DTL-16377.
Inspection of product for delivery:	
Examination	See MIL-DTL-16377.
Conformance test	See MIL-DTL-16377.
Examination for preparation of delivery	See MIL-DTL-16377.

GENERAL INFORMATION:

Table I. Standard parts.

Table II. First article tests.

NOTES:

1. The locks described herein, are intended for use with the fluorescent lighting fixtures, to prevent the fluorescent lamps from becoming loose under the severe shock and vibration conditions encountered aboard Navy ships.
2. The locks specified herein, were formerly covered on NAVSHIPS Drawing 9000-S6401-73939 and MS16565.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:48Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Name	Military p/n or specification	National Stock Number (NSN)
Lock assembly, 6- or 8-watt T5 fluorescent lamp	M16377/40-001	6250-00-399-7039
Lock assembly, 15-, 17-, or 20-watt T12 fluorescent lamp	M16377/40-002	6250-00-399-7040
Lock assembly, 17-watt T8 fluorescent lamp	M16377/40-003	---

TABLE II. First article and comparison inspection.

Test	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	---
Shock	3.5.12	4.8.7	1/
Vibration	3.5.13	4.8.8	1/
NOTE: 1/ Lamp locks require installation in fixture for testing.			

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Preparing Activity:
Navy – SH
(Project 6250-2006-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:48Z
Check the source to verify that this is the current version before use.