INCH-POUND
MIL-DTL-16377/40C(SH)
26 May 2023
SUPERSEDING
MIL-DTL-16377/40B(SH)
18 December 2008

DETAIL SPECIFICATION SHEET

FIXTURES, LIGHTING; LOCKS, FLUORESCENT LAMP

This specification is approved for use by the Naval Sea Systems Command and is available for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-16377.

Unless otherwise noted, all dimensions are in inches. For tolerances, other than those specified herein, see 3.5.2 of MIL-DTL-16377.

Figures 1 through 3 provide information for the light fixtures covered by this specification sheet. See the requirements sections for specific references to these figures.


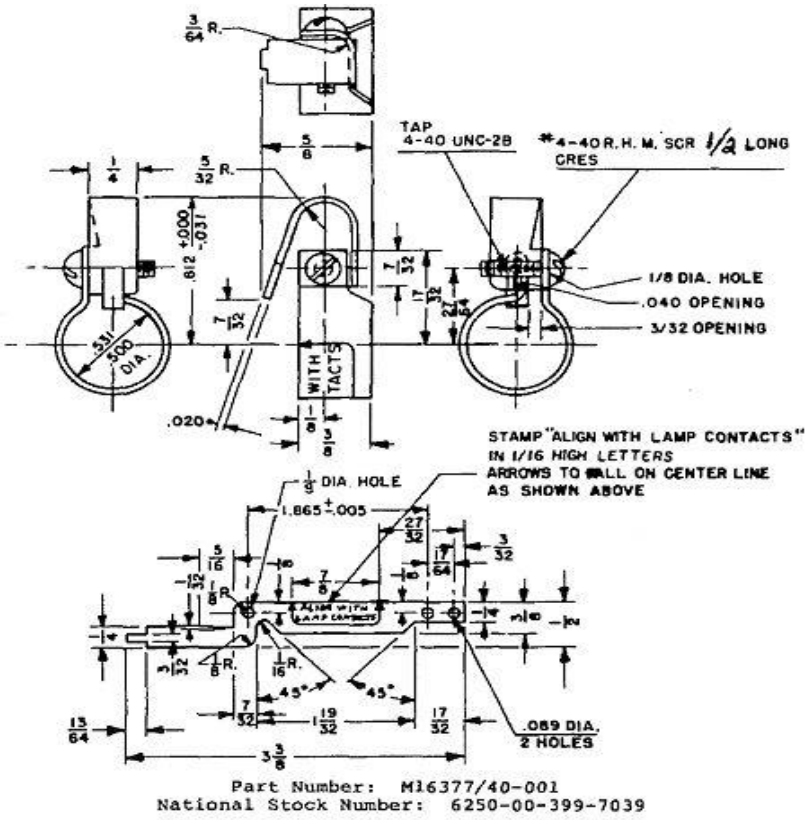


FIGURE 1. Lock assembly for one 6- or 8-watt T5 fluorescent lamp.

Distribution Statement A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:48Z
Check the source to verify that this is the current version before use.

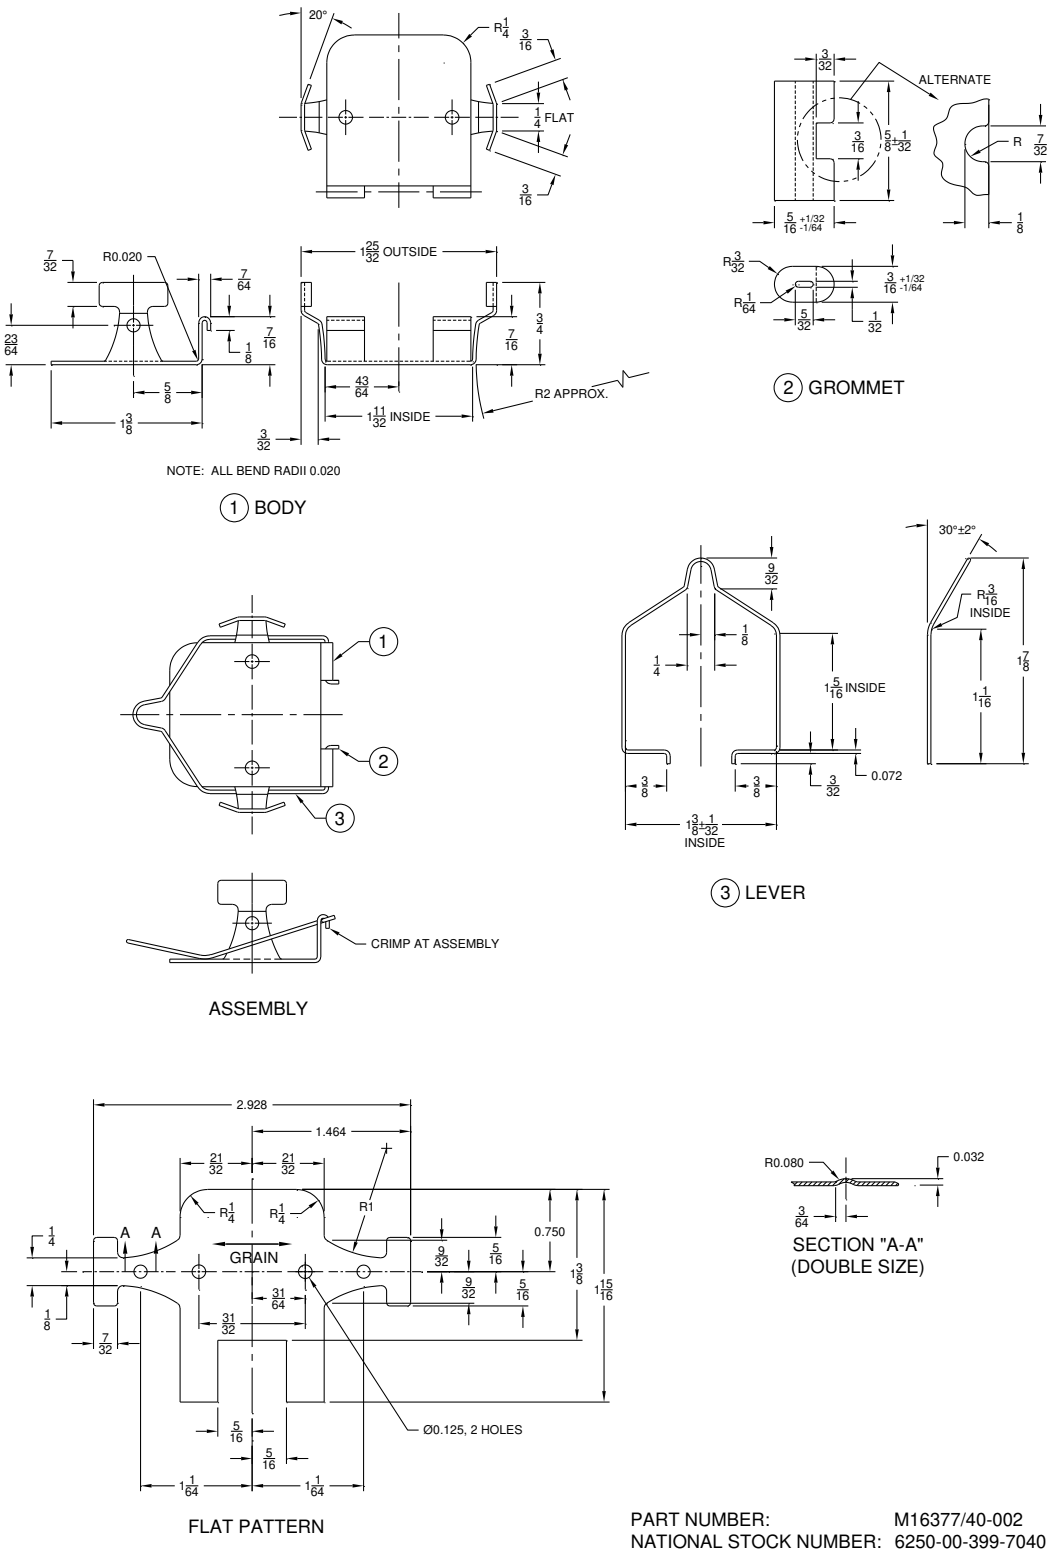

PART NUMBER: M16377/40-002
NATIONAL STOCK NUMBER: 6250-00-399-7040

FIGURE 2. Lock assembly for one 15-, 17-, or 20-watt T12 fluorescent lamp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:48Z
Check the source to verify that this is the current version before use.

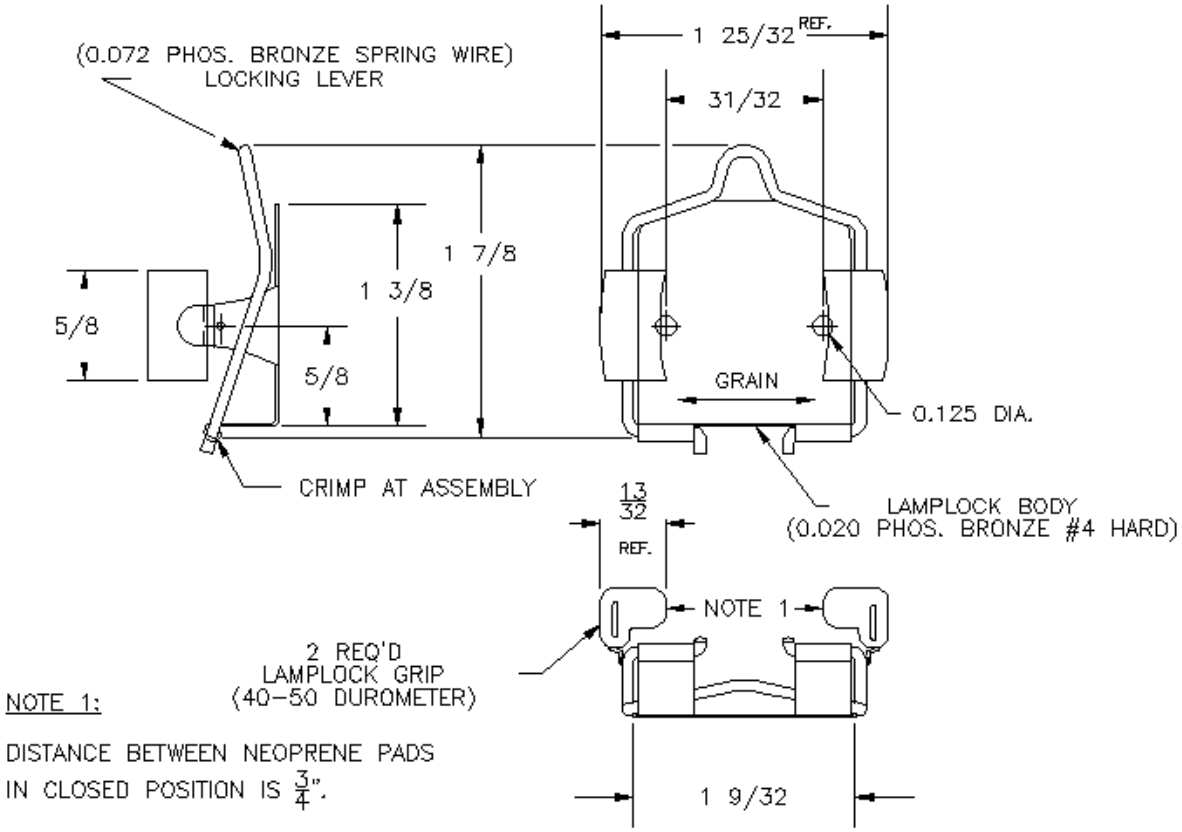


FIGURE 3. Lock assembly for one 17-watt T8 fluorescent lamp.

REQUIREMENTS

DESIGN

Dimensions and configuration:	See figures 1, 2, and 3.
Material:	
T5 lamp lock assembly:	Phosphor bronze, commercial hard.
T12 lamp lock assembly:	
Body:	Phosphor bronze, commercial hard; thickness: 0.020; gage: 24.
Lever:	Phosphor bronze, spring wire; diameter: 0.072.
Grommet:	Tubing, neoprene (40-50 durometer).
Finish:	Zinc or nickel plate (finish is optional).
T8 lamp lock assembly:	See figure 3.

EXAMINATIONS AND TESTS

Examinations and tests shall be as specified in MIL-DTL-16377 and as follows:

First article inspection:	
Complete fixtures:	See table I.
Conformance inspection:	
Comparison inspection:	Same as the first article inspection.
Conformance inspection:	See MIL-DTL-16377.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:48Z
Check the source to verify that this is the current version before use.

GENERAL INFORMATION

Assignment of military part numbers and general information is shown in table II.

NOTE: The locks described herein are intended for use with the fluorescent lighting fixtures to prevent the fluorescent lamps from becoming loose under the severe shock and vibration conditions encountered aboard Navy ships.

TABLE I. First article and comparison inspection.

Tests	Requirement Paragraph of MIL-DTL-16377	Test Paragraph of MIL-DTL-16377	Remarks
Examination	3.13	4.5	---
Shock	3.5.12	4.8.7	1/
Vibration	3.5.13	4.8.8	1/
NOTE: 1/ Lamp locks require installation in fixture for testing.			

TABLE II. Parts numbers and general information.

Item Name	Military Part Number M16377/40-	National Stock Number (NSN)
Lock assembly, 6- or 8-watt T5 fluorescent lamp	001	6250-00-399-7039
Lock assembly, 15-, 17-, or 20-watt T12 fluorescent lamp	002	6250-00-399-7040
Lock assembly, 17-watt T8 fluorescent lamp	003	---

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing activity:
Navy – SH
(Project 6250-2023-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:48Z
Check the source to verify that this is the current version before use.