MIL-F-16377/28A(SH)
11 April 1983
SUPERSEDING
MIL-F-16377/28(SHIPS)
30 November 1970

MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING; INCANDESCENT, DETAIL LIGHTING FOR AMMUNITION HOIST, 50 WATTS, 120 VOLTS, WATERTIGHT, SYMBOL 23.1

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SH).

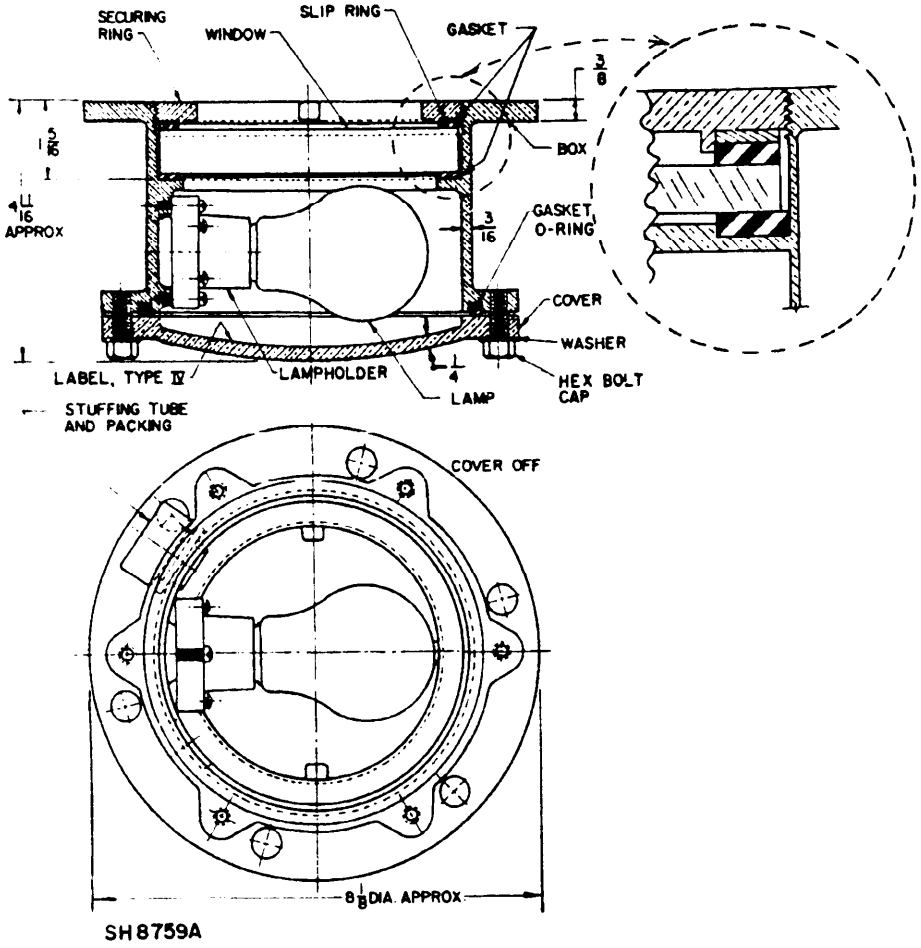


FIGURE 1. Typical view of Symbol 23.1.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

(A) denotes changes

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:45Z
Check the source to verify that this is the current version before use.

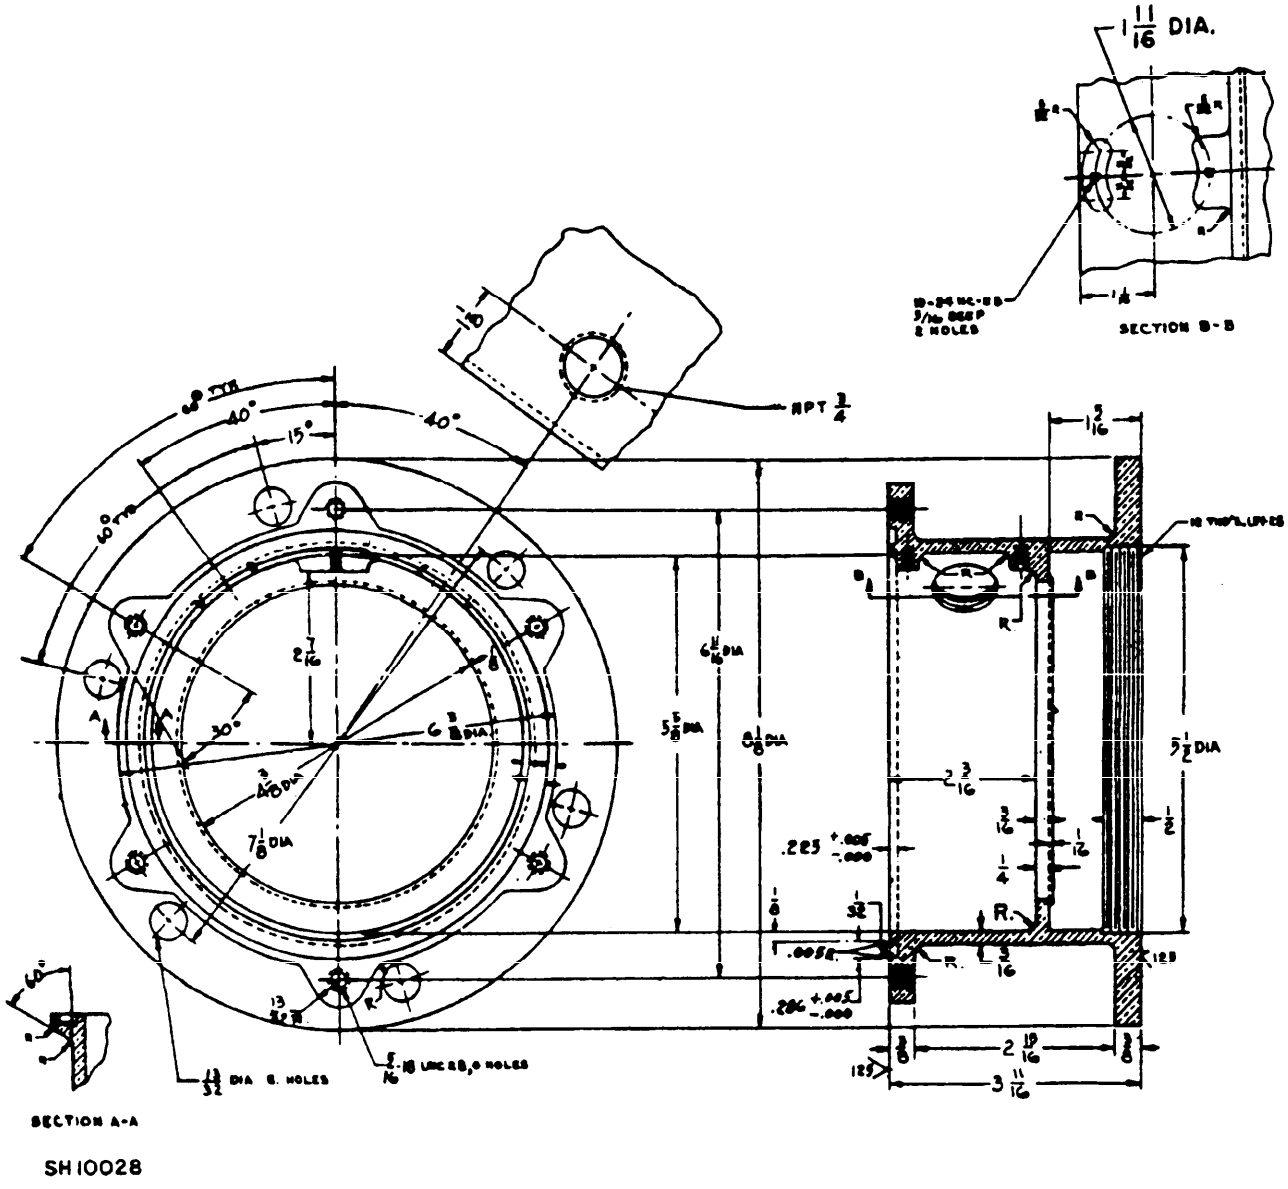


FIGURE 2. Box.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:45Z
Check the source to verify that this is the current version before use.

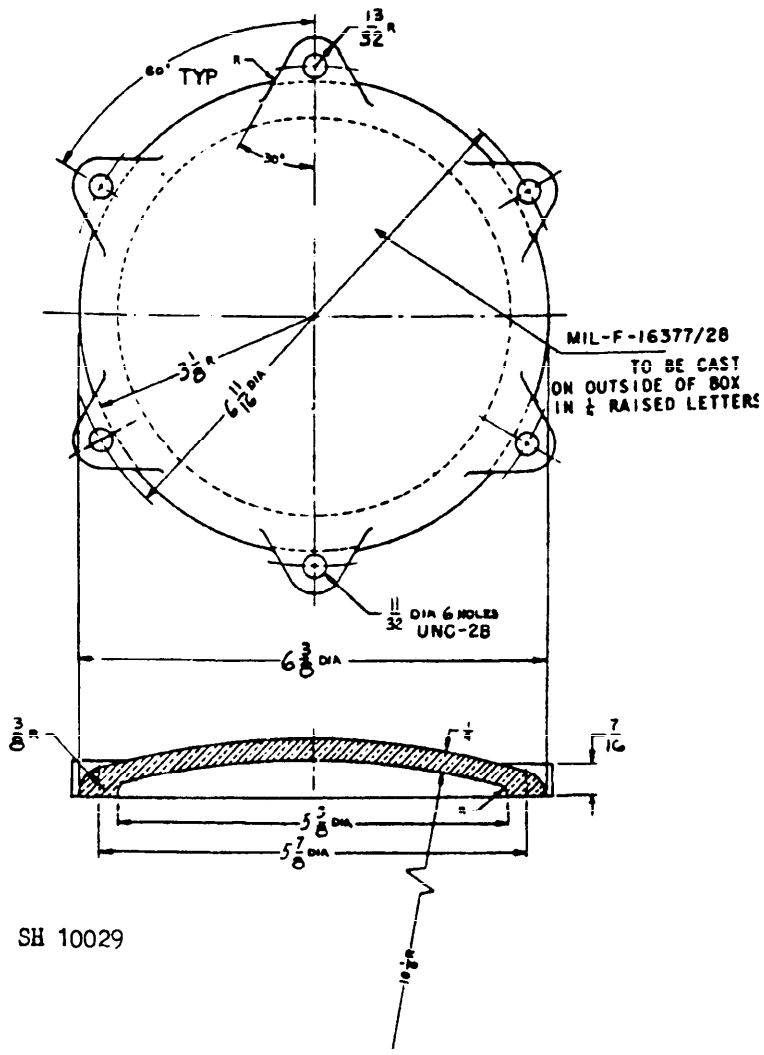


FIGURE 3. Cover.


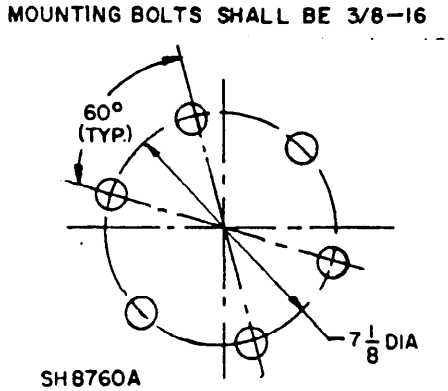



FIGURE 4. Mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:45Z
Check the source to verify that this is the current version before use.

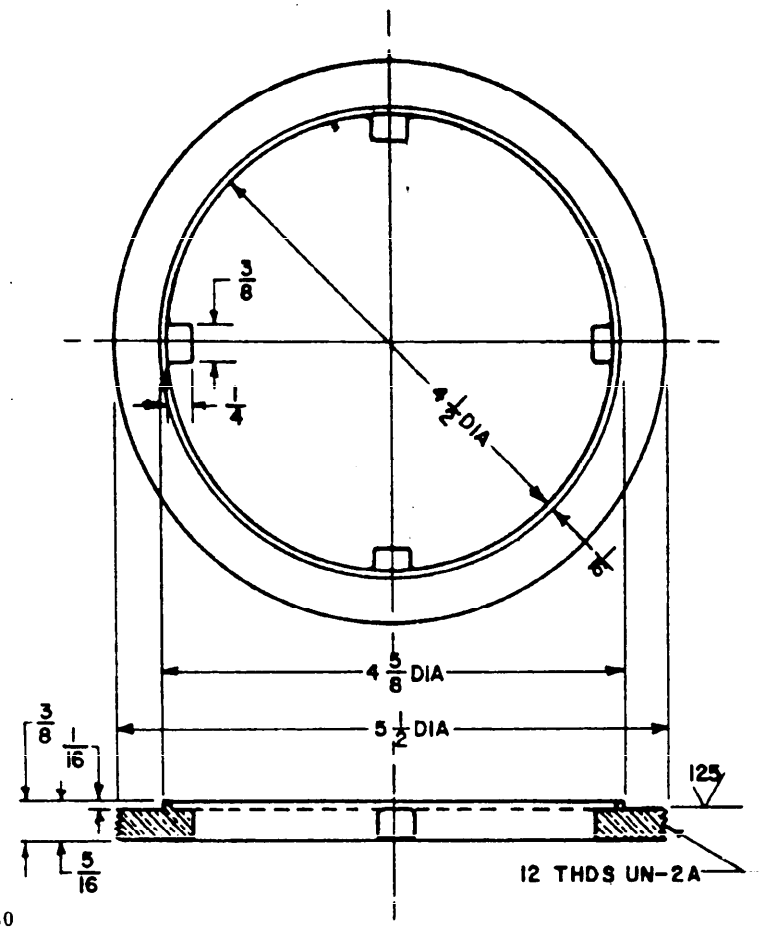

SH 10030

FIGURE 5. Securing ring.

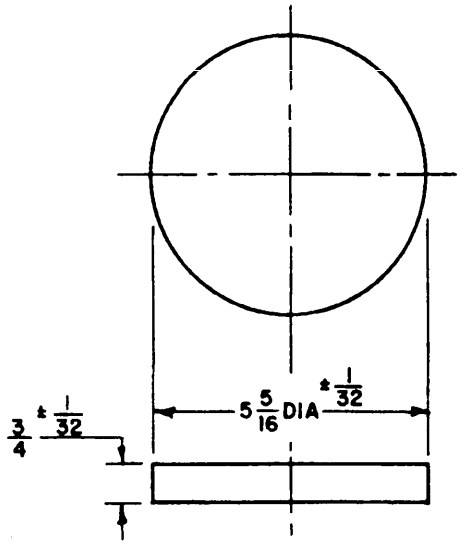

SH 10001

Material: High Impact, Heat Resistant Glass
Color: Clear Transparent
Transmittance: 85 percent minimum

FIGURE 6. Window.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CLASSIFICATION:
Type: II
Class: 1
SYMBOL NUMBER:
23.1: Fixture, detail lighting for ammunition hoist, bulkhead mounted, for use with one white 50-watt incandescent lamp.
DESIGN:
Electrical rating: 120 volts, 50 watts.
Dimensions and configuration: See figures 1, 2 and 6.
Box, securing ring, and cover: Brass of corrosion resistant steel.
Slip ring: Brass or corrosion resistant steel, 5-11/32 inches o.d. by 4-21/32 inches i.d.by 1/32 inch thick.
Gasket:
"O"-ring: Rubber, AN6227-61.
Flat: Rubber, 5-3/8 inches o.d. by 4-5/8 inches i.d. by 1/8 inch thick.
Window: Clear transparent see Figure 6.
Lampholder: MIL-L-970/6 two contact.
Stuffing tube: Size 2, MIL-S-19622/3-002.
Stuffing tube packing: Size 2, MIL-S-19622/17-03.
Lamp and cable: This fixture shall be designed to accommodate a 50 watt white lamp shown on W-L-101/80 (Industry number 50A/RS(120) and size DPS-3 cable conforming to MIL-C-915/40. (Lamp and cable are not furnished with fixture). (A)
Weight: 15 pounds max.
Label: Labels shall be furnished in accordance with MIL-F-16377. One type IV label shall be applied as shown on figure 1. The information to be shown on the type IV label shall be

"INSTALL 50-WATT LAMP ONLY
LAMP: NSN6240-00-143-3070."

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection:
Complete fixtures: See table I
Window See table II
Quality conformance:
Comparison inspection: Same as the first article inspection
Inspection of product for delivery:
Examination: See MIL-F-16377
Examination for preparation of delivery: See MIL-F-16377
Quality conformance tests: See MIL-F-16377

GENERAL INFORMATION:
Assignment of Military part numbers and general information is shown in table III.

TABLE I. First article and comparison inspection for complete fixtures.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Enclosure effectiveness	3.5.11	4.8.14	Watertight
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Enclosure effectiveness	3.5.11	4.8.14	Watertight
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Optical uniformity	3.7.5.1	4.8.4	
Color and luminous transmittance	3.7.3.7	4.8.6.3	
Magnetic permeability	3.4.8	4.8.18	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:45Z
Check the source to verify that this is the current version before use.

TABLE II. First article and comparison inspection for window.

Tests	Requirement paragraph	Test paragraph
Examination	3.13	4.5
Optical uniformity	3.7.4.1.1	4.8.4
Color and luminous transmittance	3.7.3.7	4.8.6.3
Shock	3.5.12	4.8.7
Vibration	3.5.13	4.8.8

TABLE III. Part number and general information.

Military Part number 1/ M16377/28-	Item name	National Stock Number (NSN)
23.1	Complete fixture, Symbol 23.1	6210-00-151-9844
001	Window	6210-00-399-6321

1/ Formerly covered on Drawing 9-S-4419-L and MS17317.

Preparing activity
Navy - SH
(Project 6210-N576)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:45Z
Check the source to verify that this is the current version before use.