MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING; INCANDESCENT, DETAIL LIGHTING FOR WATER GAUGES, 15 or 25 WATTS, 120 VOLTS, SYMBOL 134.1

This specification is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SH).

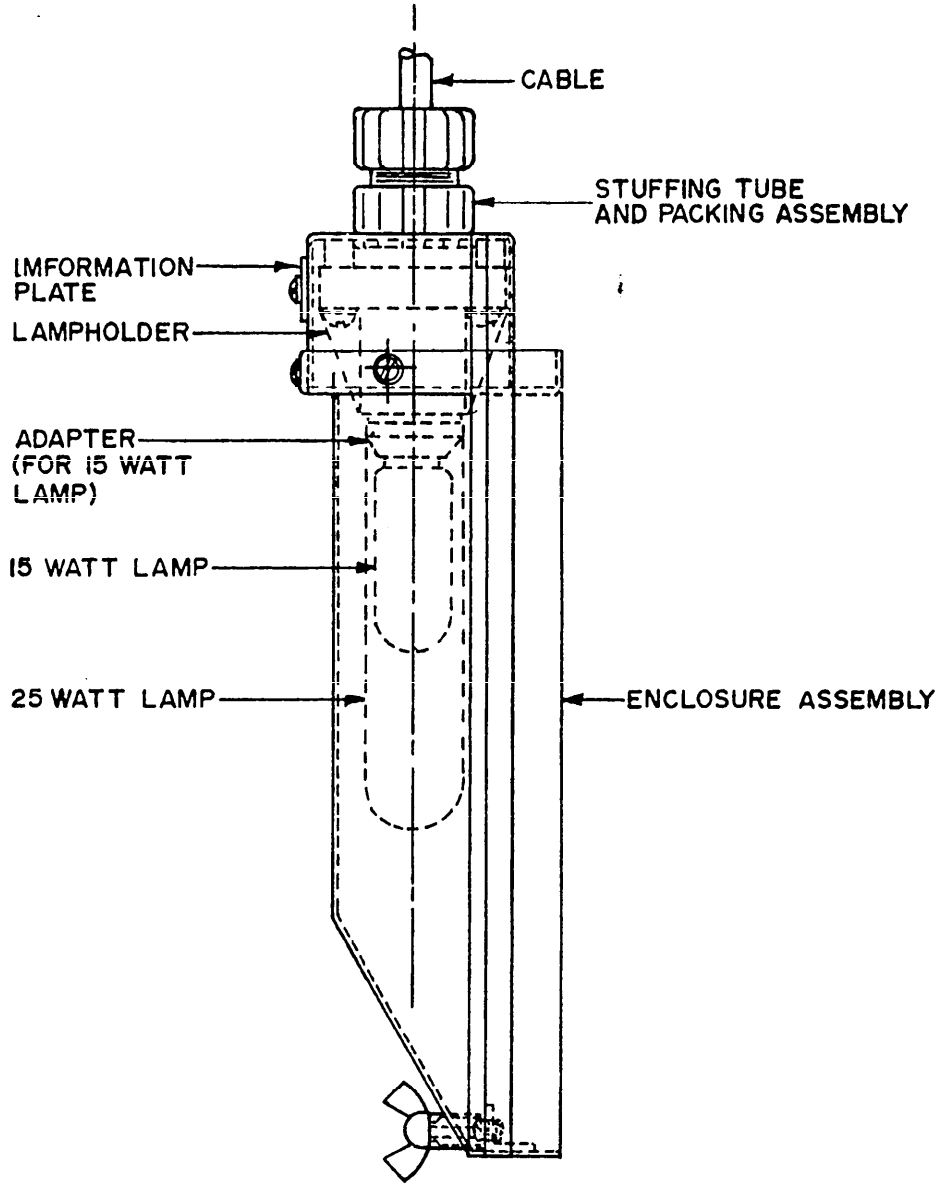


FIGURE 1. Fixture, incandescent, Symbol 134.1.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.

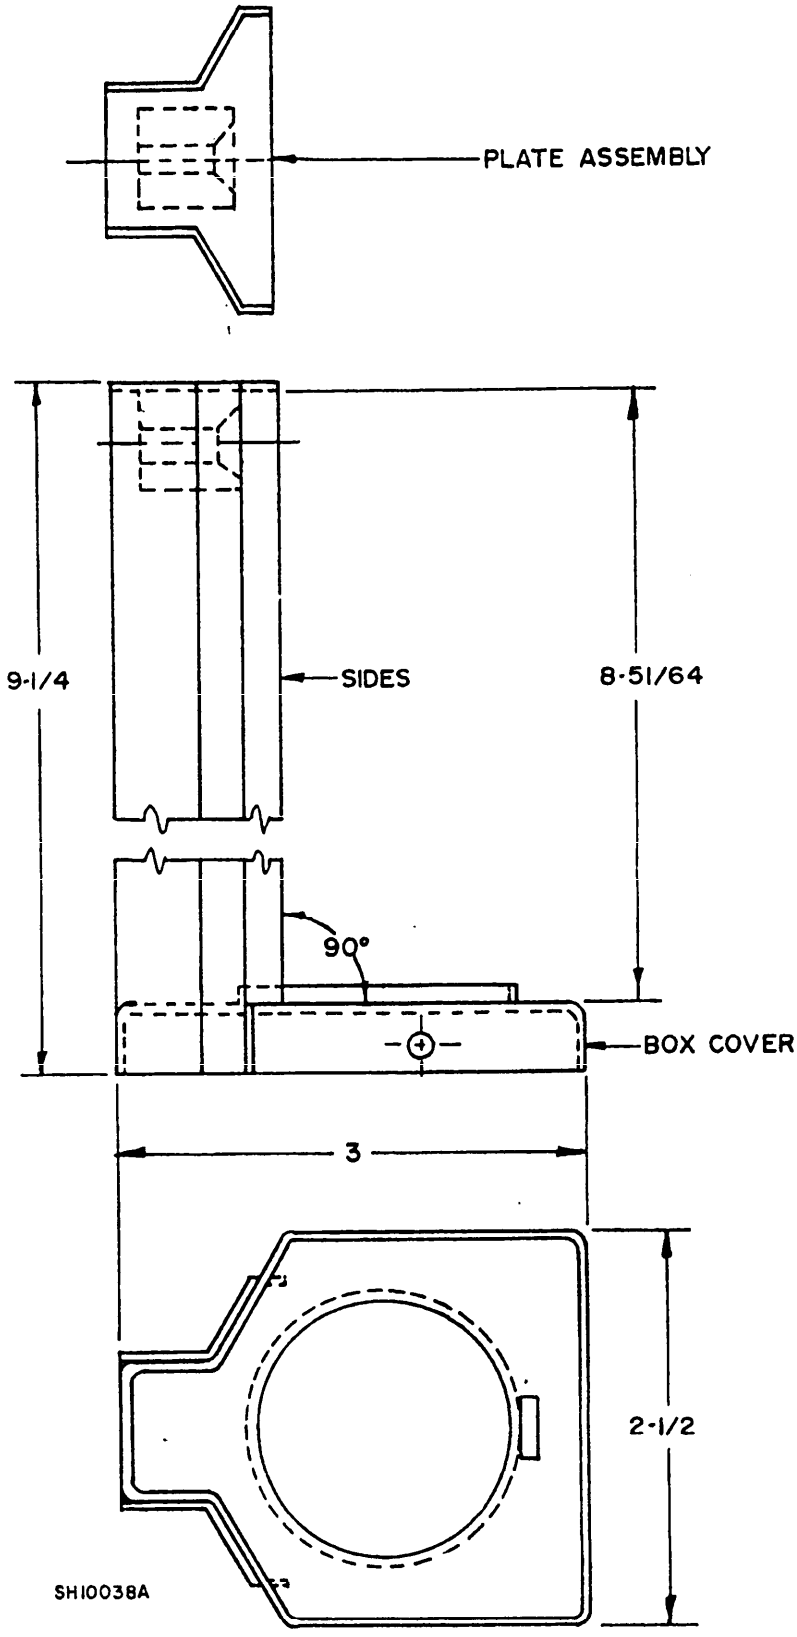


FIGURE 2. Housing assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.

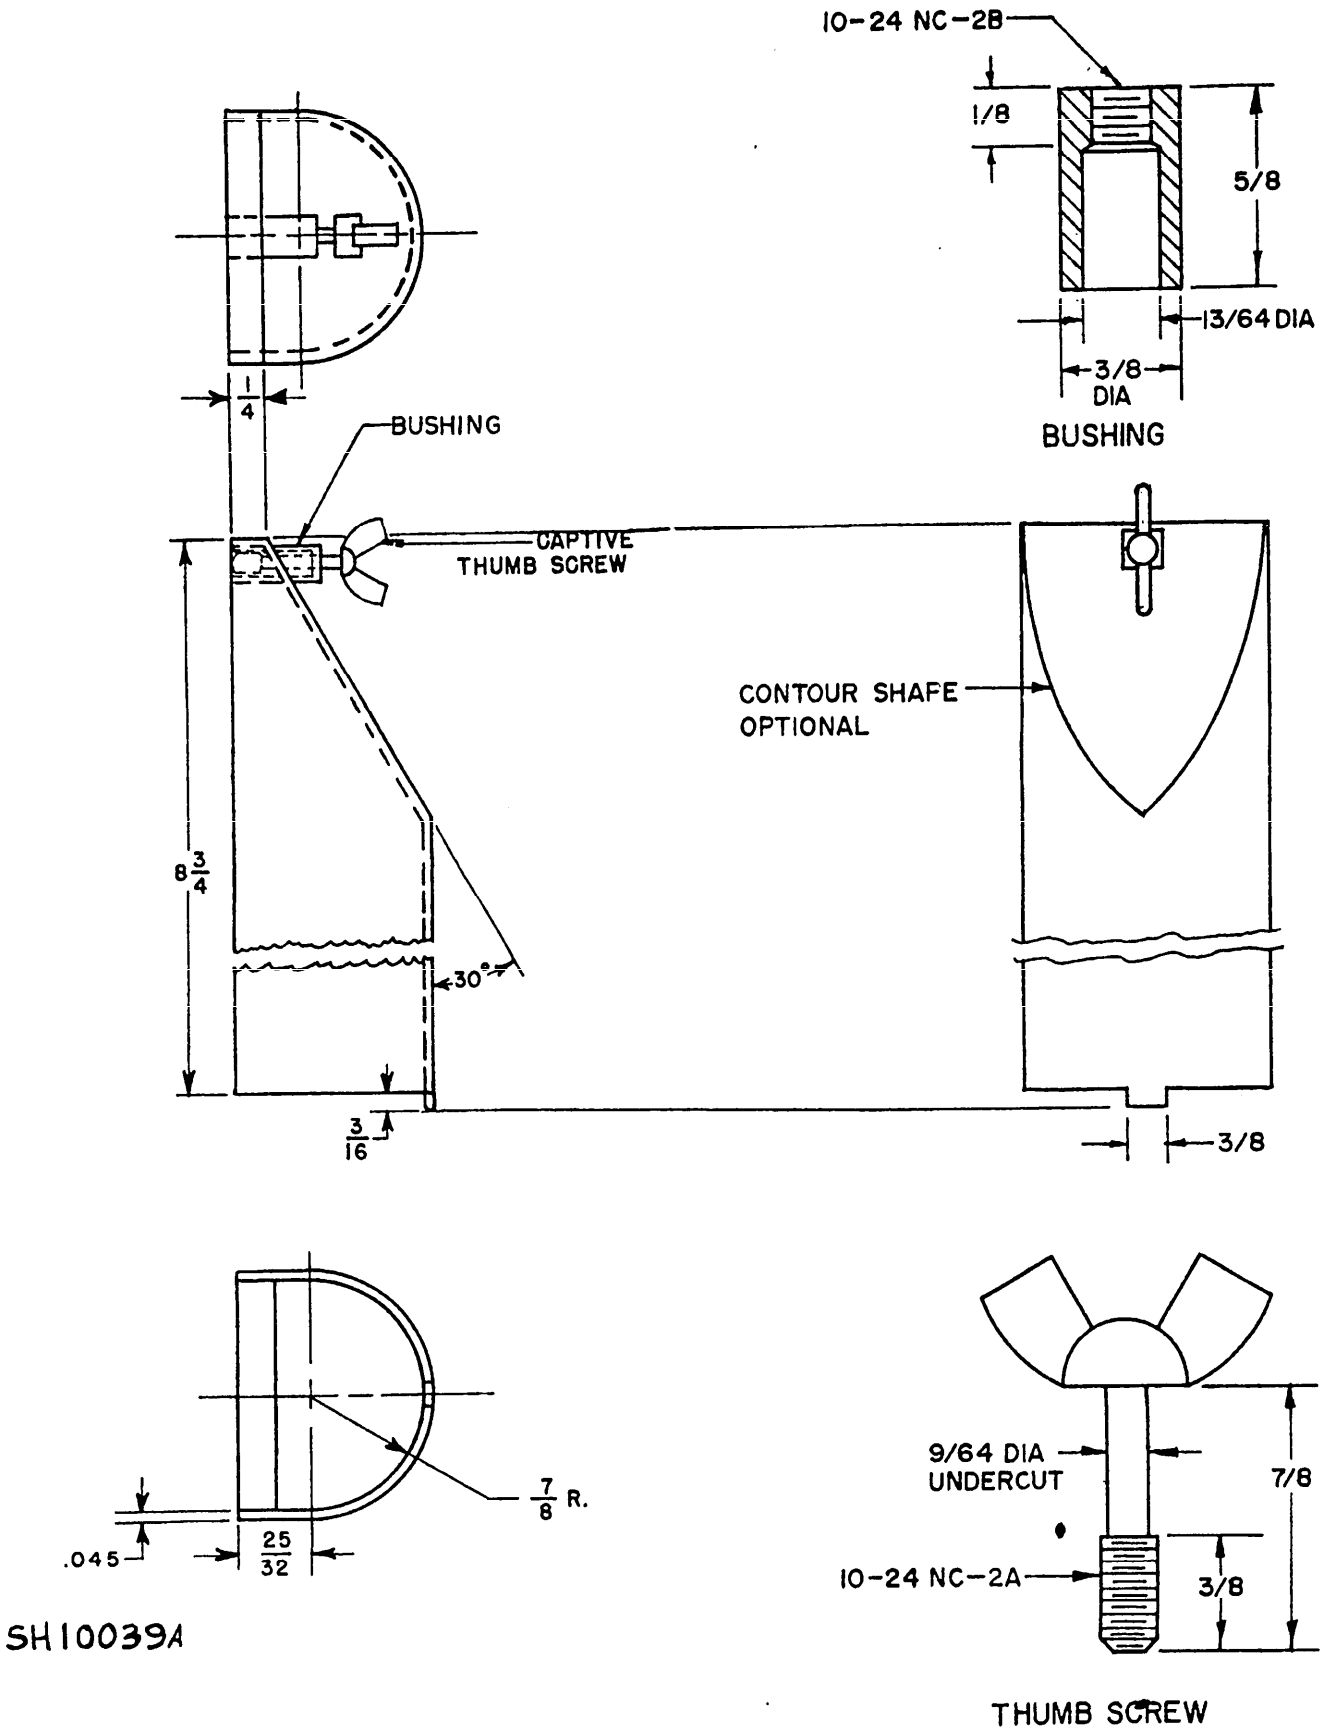


FIGURE 3. Lamp cover assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.

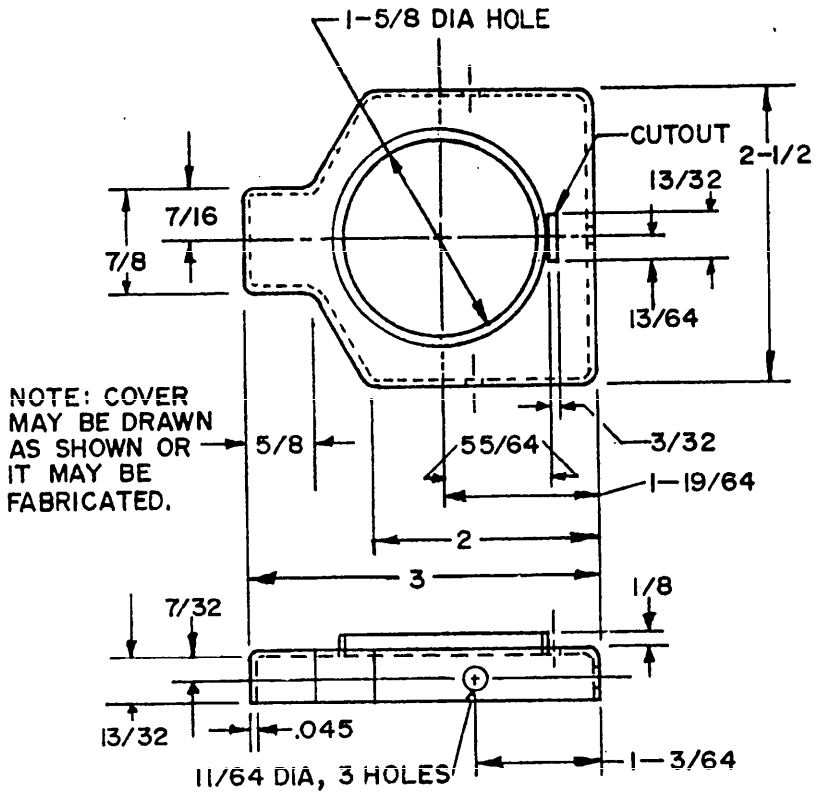


FIGURE 4. Box cover.

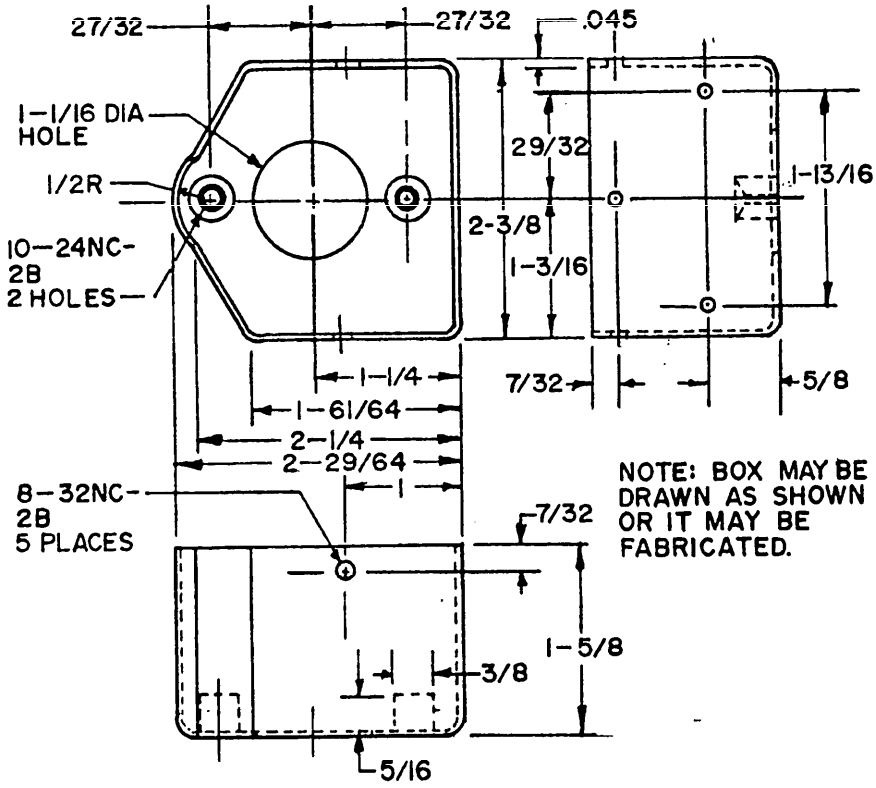


FIGURE 5. Box.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.

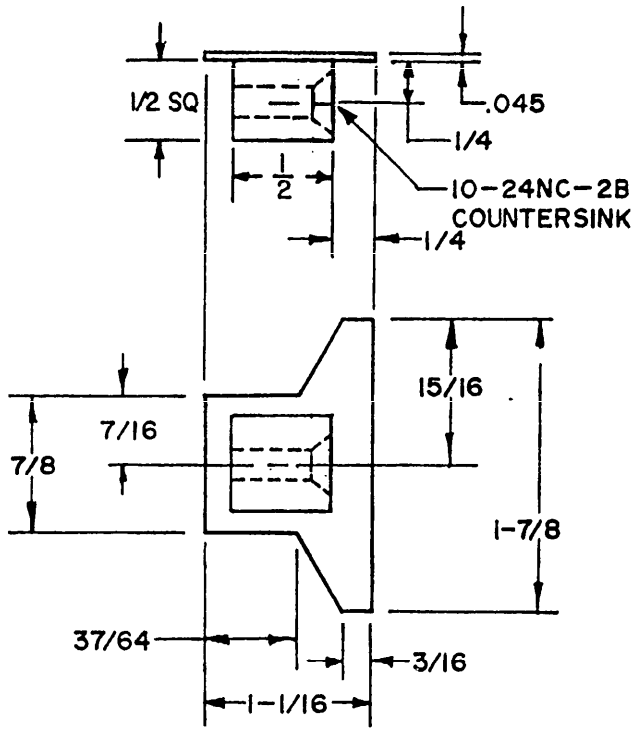


FIGURE 6. Plate assembly.



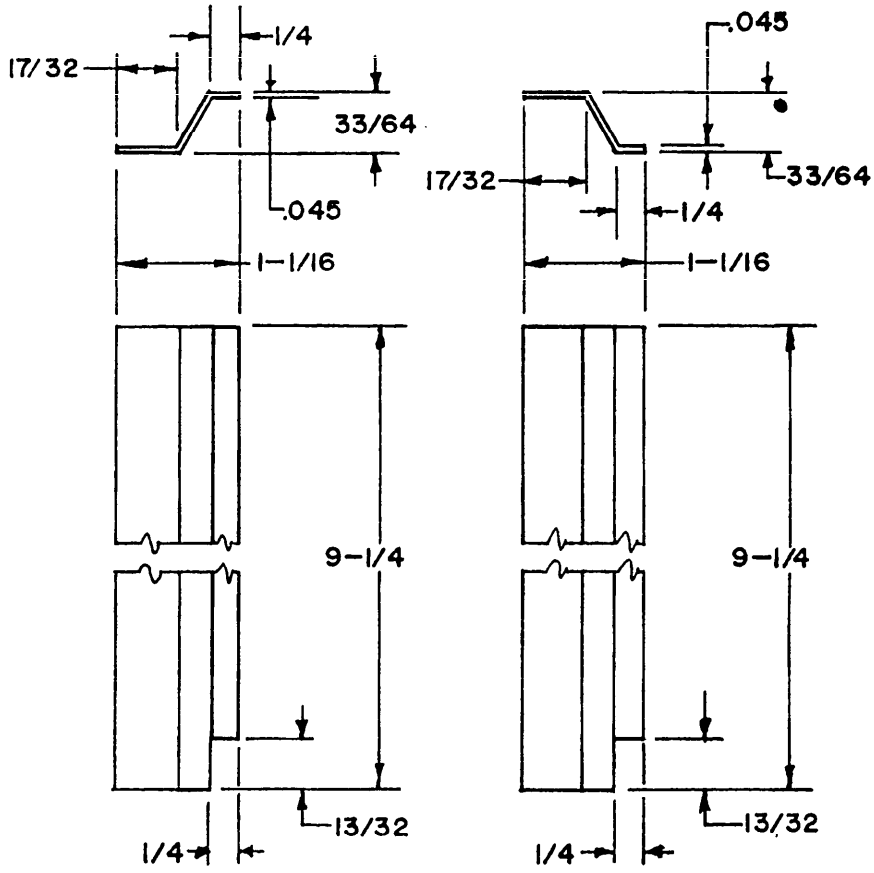


FIGURE 7. Sides.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.

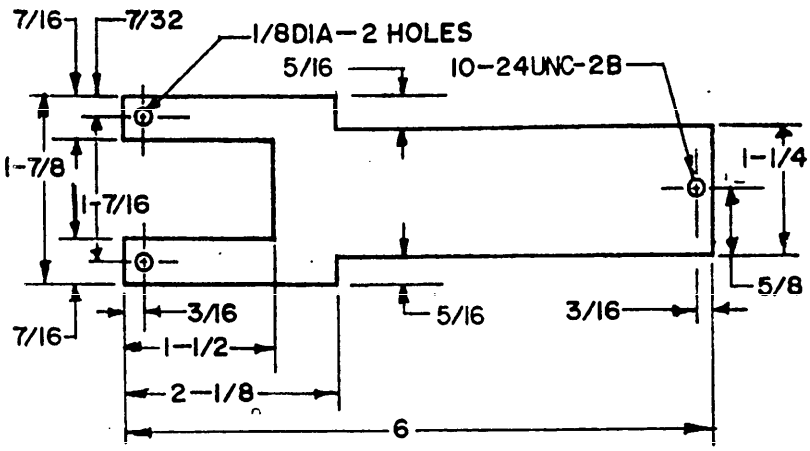


BLANK

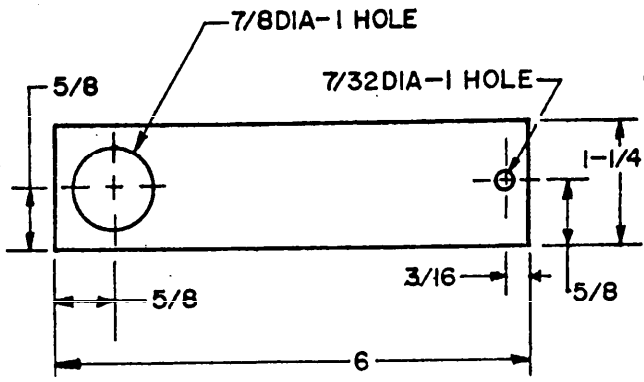


BLANK

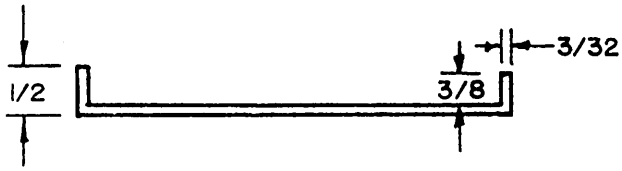


A-SHORT BRACKET

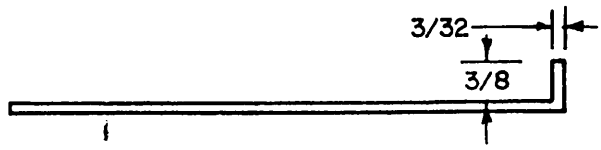


B-RETAINING BRACKET

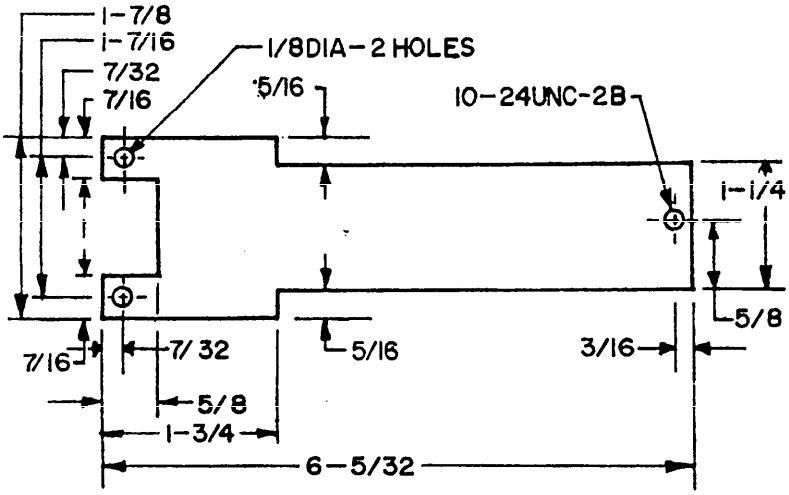


BLANK

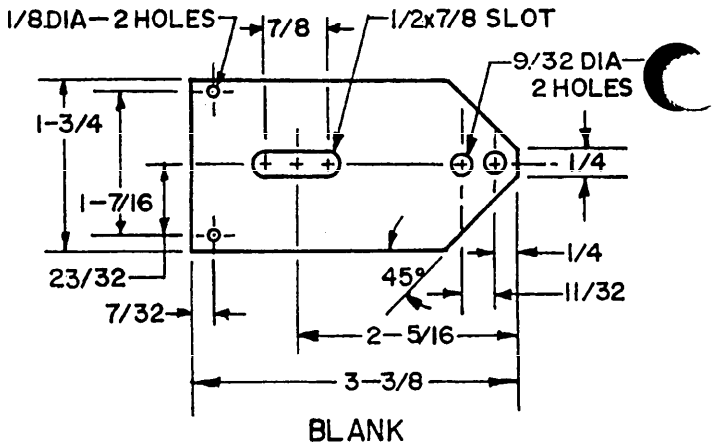

BLANK

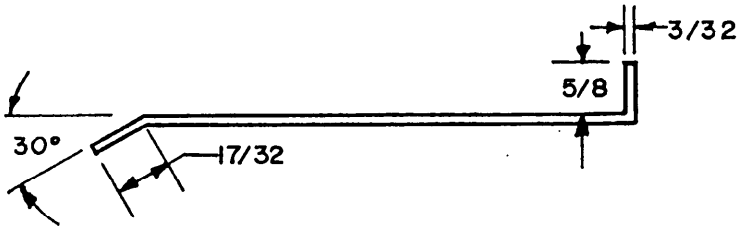

C-LONG BRACKET

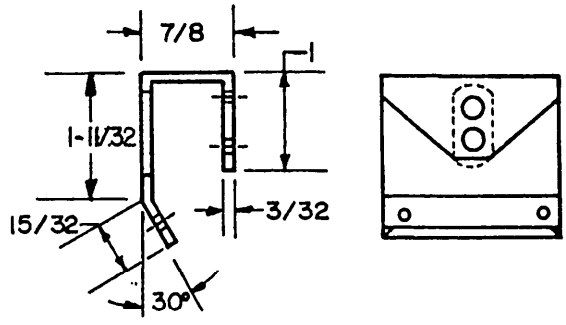

D-FLUSH BRACKET

NOTE: BLANKS SHALL BE BENT AS INDICATED. FINAL BENDING OF LONG AND SHORT BRACKETS SHALL BE DONE BY INSTALLING ACTIVITY.

3H8782B

FIGURE 6. Brackets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.

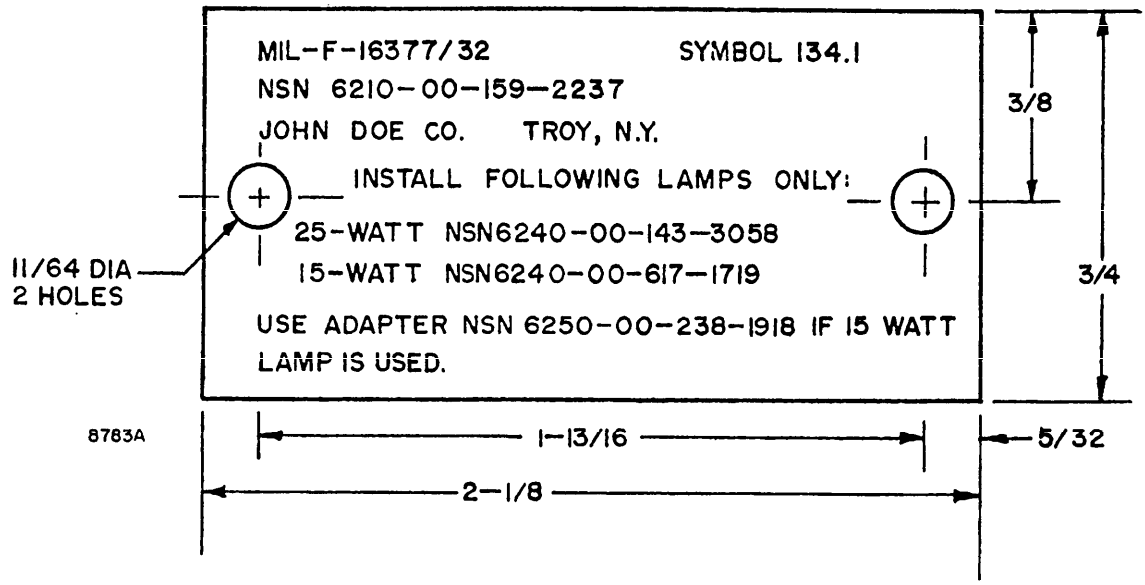


FIGURE 9. Information plate.

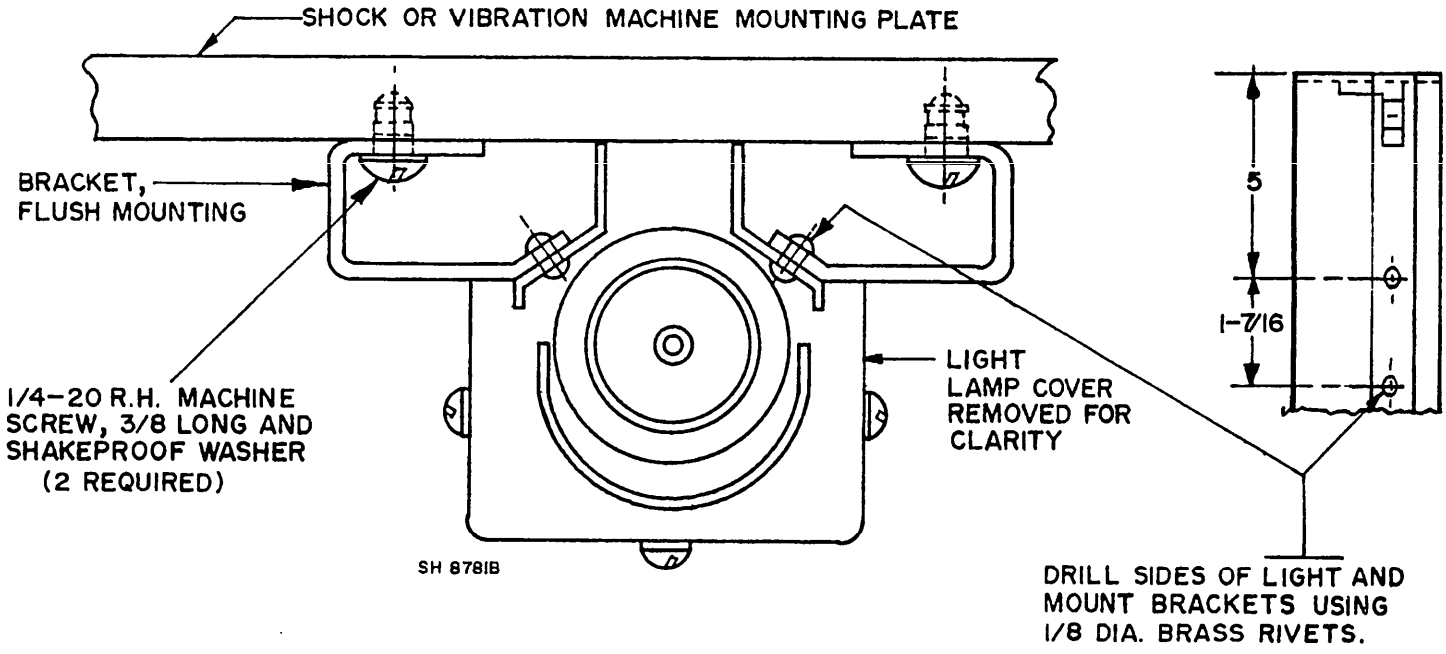


FIGURE 10. Mounting for shock and vibration tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CLASSIFICATION:
Type: II
Class: 1

SYMBOL NUMBER:
134.1: Light, with mounting brackets, for use with one white 25-watt incandescent lamp, or a 15 watt lamp by means of an adapter.

DESIGN:
Electrical rating: 15 or 25 watts, 120 volts.
Dimensions and configuration: See figures 1 through 10.
Enclosure assembly: Brass. At assembly all seams and joints shall be silver brazed.
Lampholder: MIL-L-970/6, two contact.
Cable: 15 feet of type DCOP-2 in accordance with MIL-C-915/3.
Stuffing tube: Size 2 - MIL-S-19622/1-002.
Packing assembly: MIL-S-19622/17-01 (size 2).
Mounting brackets and hardware: Brass. The following shall be furnished with each light in a bag attached to the light:

(a) Two short brackets.
(b) Two long brackets.
(c) Two retaining brackets.
(d) Two flush brackets.
(e) Two # 10-24 R.H. Machine screws, 5/8 long.
(f) Two 1/4-20 R.H. Machine screws, 3/8 long.
(g) Two shockproof washers for 1/4-20 screw.
(h) Four 1/8 Dia. R.H. rivets, 1/4 long.

Lamp and adapter: Lights shall be designed to accommodate a 25-watt lamp shown on MS15551-1, Industry number 25T10/1F(115). A 15-watt lamp shown on MS15574-1, Industry number 15T7C, may be used with these lights by means of an adapter. The adapter shall convert medium screw to candelabra screw, shall be UL approved, and rated at 75 watts. (Lamps and adapter are not furnished.)
Weight: 3 pounds maximum.
Designation and marking: An information plate shall be furnished in accordance with MIL-F-16377 permanently mounted as shown on figure 1. Legend shall be as shown on figure 9 in 3/32 high black filled letters. Material shall be brass, 1/32 thick.
Finish: Clean and bright deep only. This light shall not be painted.

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection:	See table I.
Quality conformance:	
Comparison inspection:	Same as the first article inspection.
Inspection of product for delivery:	
Examination:	See MIL-F-16377.
Examination for preparation of delivery:	See MIL-F-16377.
Quality conformance tests:	See MIL-F-16377.

GENERAL INFORMATION: (a) Assignment of Military part numbers and general information is as follows:
Military part number: M16377/32-134.1
National Stock number: 6210-00-159-22-37.
(b) Formerly covered on Drawing 9-S-5160L and MS17782.

TABLE I. First article and comparison inspection for complete fixtures.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Shock	3.5.12	4.8.7	1/
Vibration	3.5.13	4.8.8	1/
Dielectric	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Magnetic permeability	3.4.8	4.8.18	

1/ The light shall be mounted on a test plate using the bracket for flush mounting as shown on figure 10.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 6210-N580)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:46Z
Check the source to verify that this is the current version before use.