This document has been approved for public release and sale; its distribution is unlimited.

MIL-F-16377/34(SHIPS)
30 November 1970
SUPERSEDING
MS17151(SHIPS)
9 June 1961
MS17152A(SHIPS)(IN PART)
7 January 1963
MS17153A(SHIPS)(IN PART)
12 August 1965
(See page 8)

MILITARY SPECIFICATION SHEET

FIXTURES, LIGHT, INCANDESCENT, DETAIL LIGHTING FOR GYRO COMPASS

FOR SUBMARINES, PRESSUREPROOF, 15 WATTS, 120 VOLTS, SYMBOL 335

The complete requirements for procuring the light described herein shall consist of this document and the latest issue of MIL-F-16377(SHIPS).

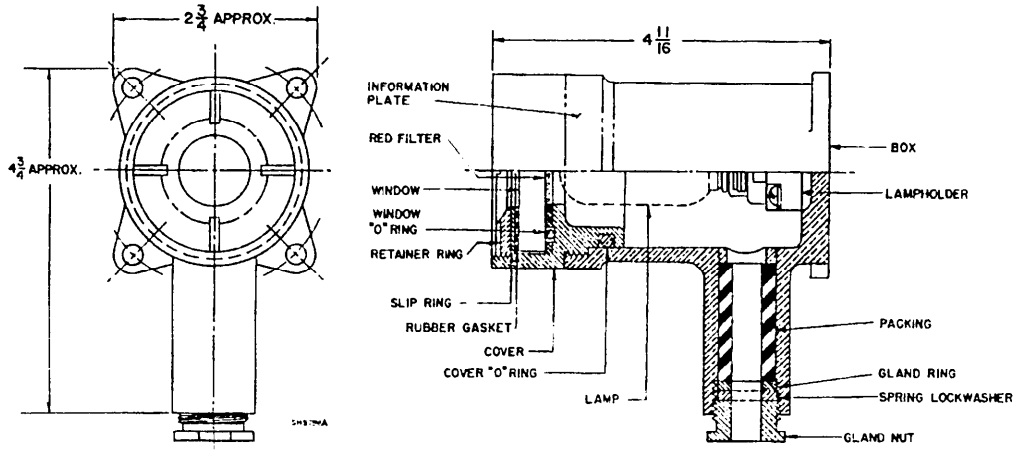


Figure 1 - Light, incandescent, detail lighting, Symbol 335.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

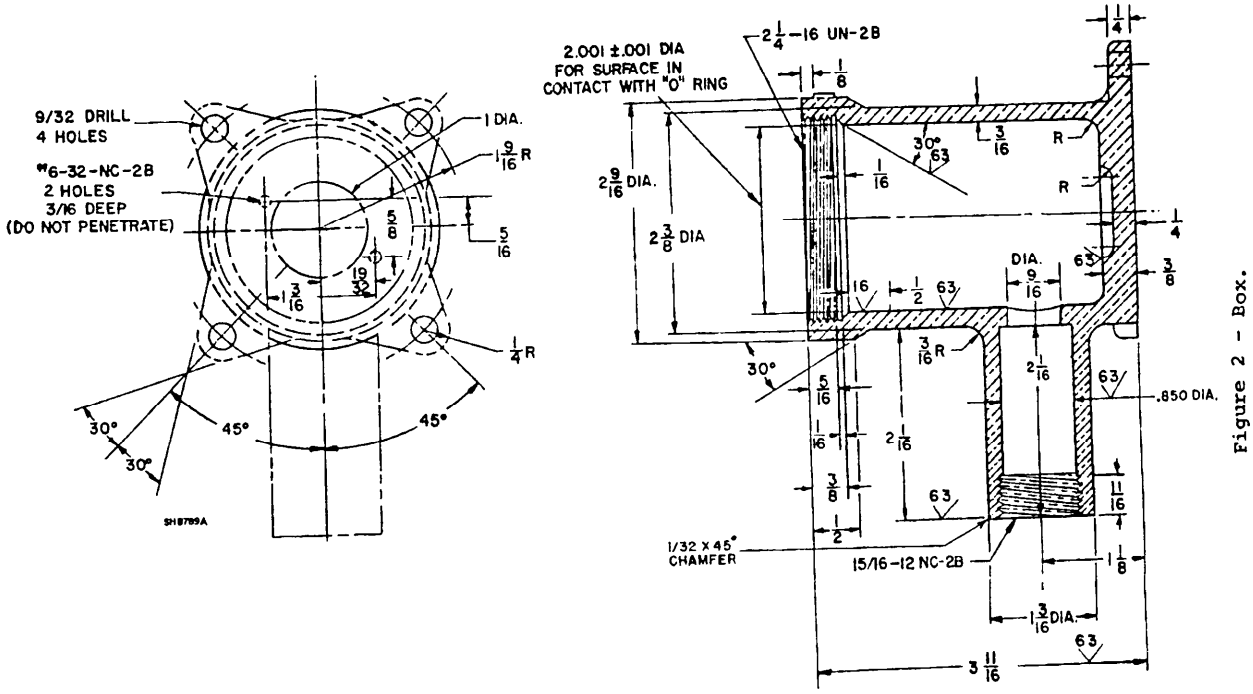


Figure 2 - Box.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

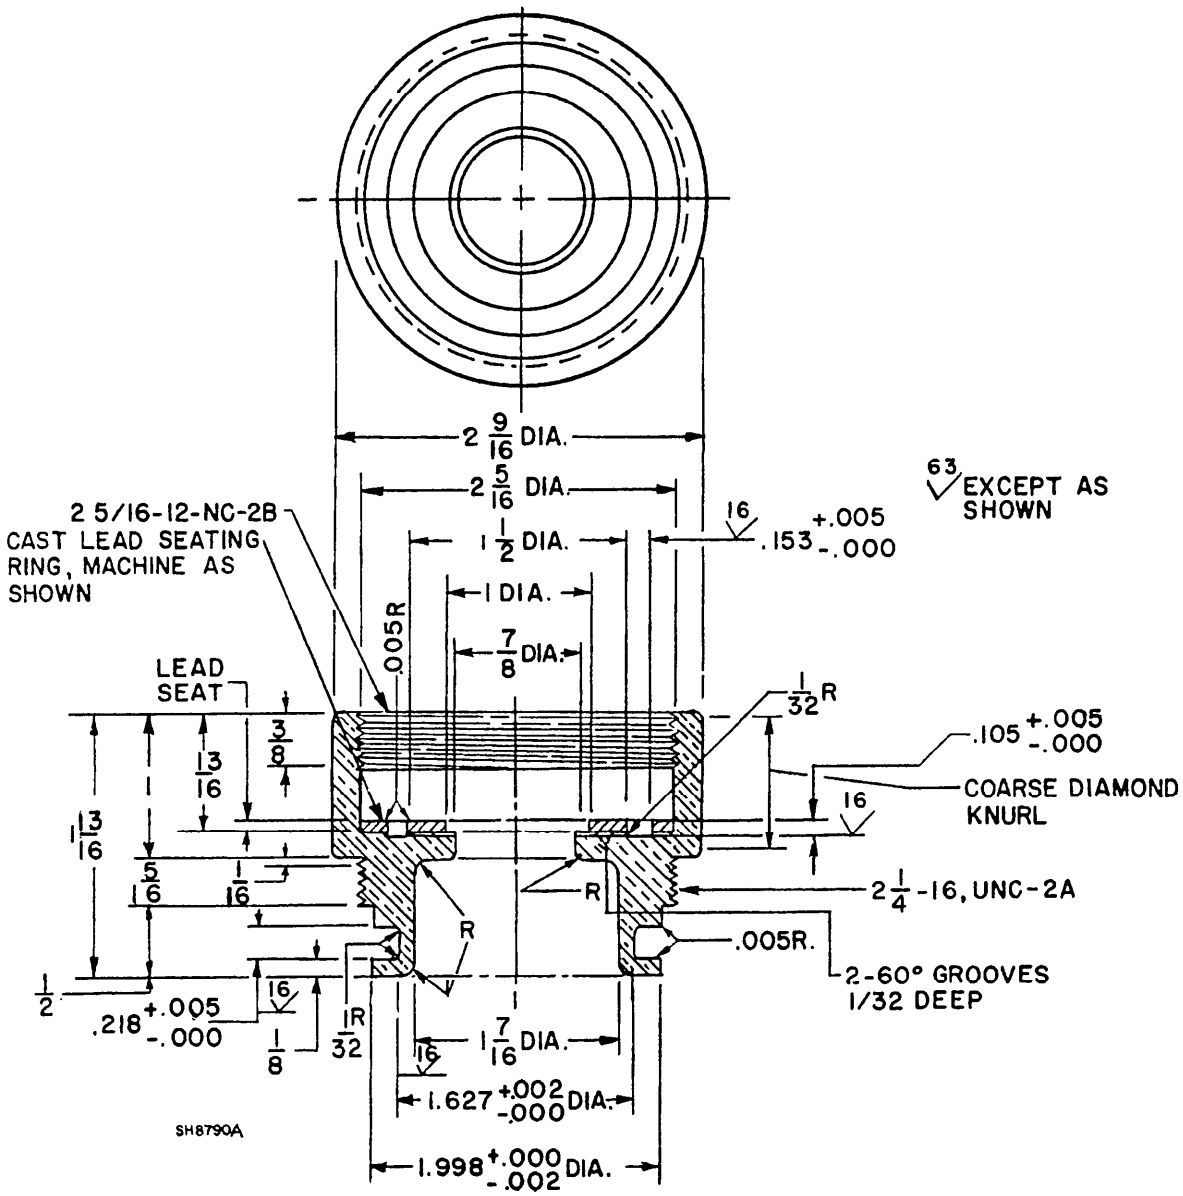


Figure 3 - Cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

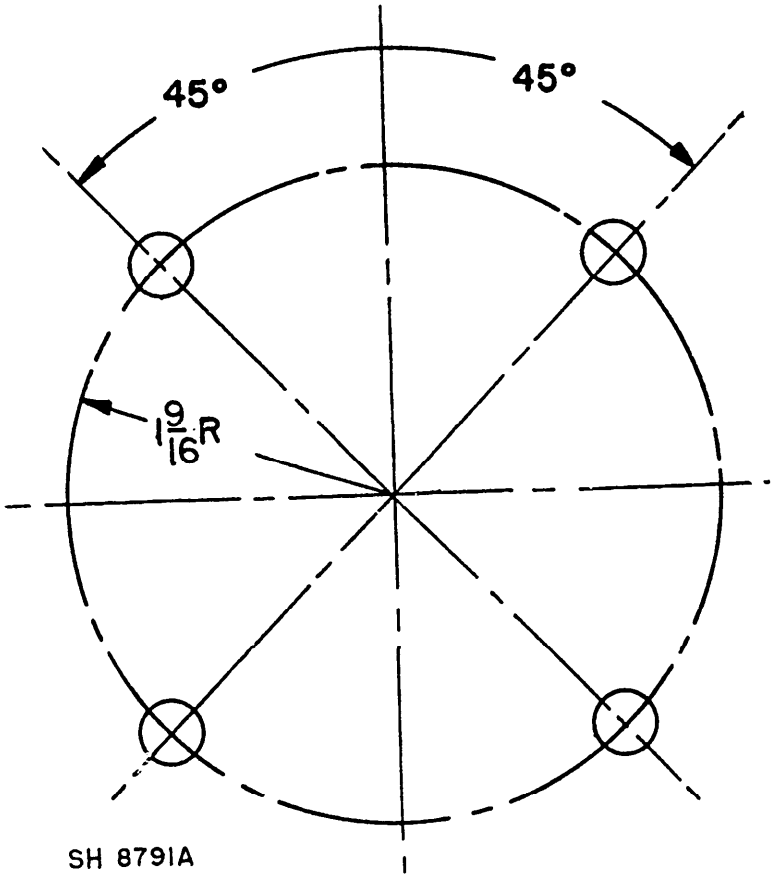


Figure 4 - Mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.


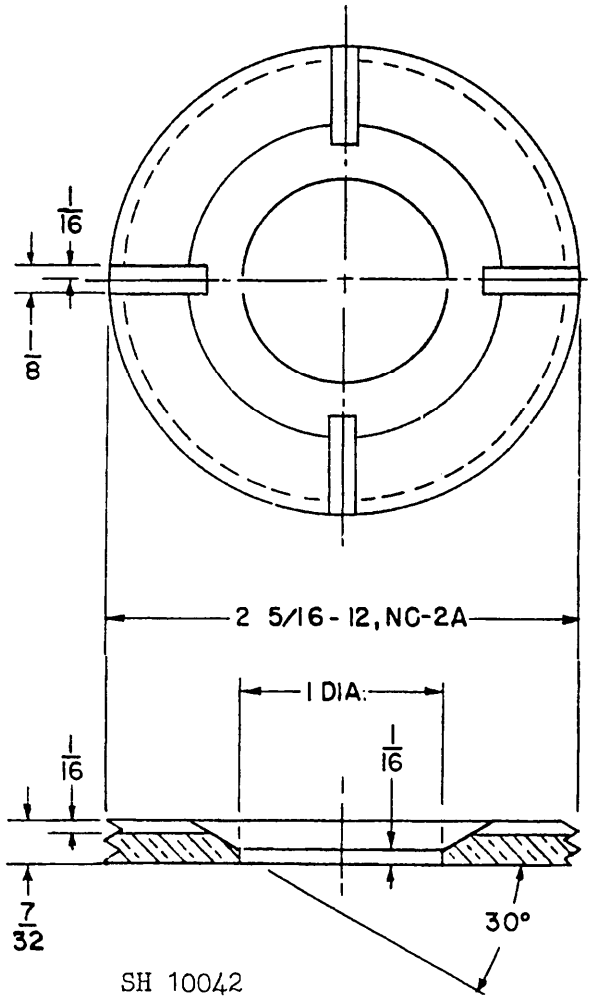


Figure 5 - Retainer ring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

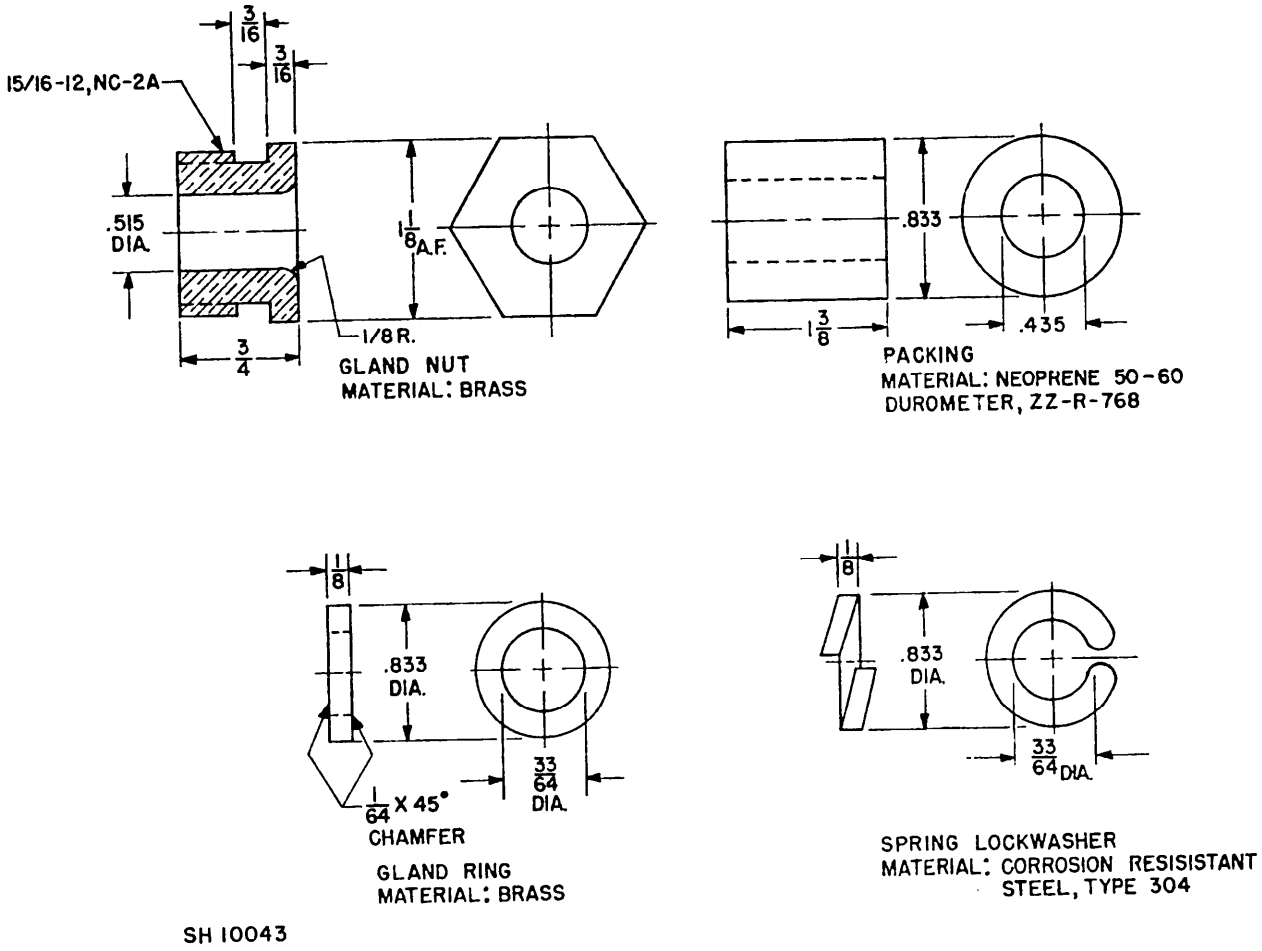

SH 10043

Figure 6 - Gland nut, packing, gland ring and spring lockwasher.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Type: II

Class: 1

Symbol 335: Light, incandescent, detail lighting for gyro compass for submarines, for use with one white (clear) 15-watt lamp.

Design:

Electrical rating: 120 volts, 15 watts.

Dimensions and configuration: See figures 1 through 6.

Box and cover: Brass or bronze. If cast material is used, which proves to be porous under the effectiveness of enclosure test (no water leakage is allowed), then the box and cover shall be impregnated in accordance with MIL-STD-276.

Ring, retainer: Brass, figure 5.

Ring, slip: Brass, 2-1/8 o.d. by 1.00 i.d. by 1/32 inch thick.

Gaskets:

Window, flat: Rubber, 2-1/8 o.d. by 1.00 i.d. by 1/16 inch thick.

Window, "O"-ring: Neoprene, or Buna N rubber, 65-75 durometer hardness. Size shall conform to AN6227-27.

Cover, "O"-ring: Neoprene, or Buna N rubber, 65-75 durometer hardness. Size shall conform to AN6227-29.

Window:

Clear-transparent, heat resistant glass, 1-5/16 inches in diameter by 3/32 inch thick.

Red filter: 0.968 inch diameter by 0.062 thick. Material shall be plastic sheet conforming to type RTPS-1 of MIL-P-24191.

Lampholder: MIL-L-970/1.

Gland nut, packing, gland ring and lock washer: See figure 6.

Lamp and cable: Light shall be designed to accommodate a 15-watt (clear) white incandescent lamp, conforming to MS15574-1, industry number 15T7C and DSS-3 cable of MIL-C-915/8. (Lamp and cable not furnished.)

Weight: 4 pounds, 4 ounces, max.

Information plate: Brass, permanently mounted where shown on figure 1. Legend in 1/8 inch characters shall be as follows:

"INSTALL 15-WATT LAMP ONLY
LAMP: FSN6240-617-1719
MIL-F-16377/34 REV.___"
(insert revision letter of document)

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection:	See table I
Quality conformance:	
Comparison inspection:	Same as the first article inspection
Inspection of product for delivery:	
Examination:	See MIL-F-16377
Examination for preparation of delivery:	See MIL-F-16377
Quality conformance tests:	See MIL-F-16377

Table I - First article and comparison inspection for complete fixtures.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Enclosure effectiveness	3.5.11	4.8.14.4	Submersible to 1000 p.s.i.
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Enclosure effectiveness	3.5.11	4.8.14	Submersible to 1000 p.s.i.
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Magnetic permeability	3.4.8	4.8.18	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

General Information: Assignment of Military part numbers and general information is shown in table II.

Table II - Part number and general information.

Military part number M16377/34-	Item name	Federal Stock Number (FSN)	Supersedes part number
335 001 002	Complete fixture, Symbol 335 Window, clear Red filter	6210-635-8814	1/ MS17151-335 MS17152-6 MS17153-2

1/ Formerly covered on Drawing 9000-S6410-74493.

Preparing activity:
Navy - SH
(Project 6210-N390)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.