MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING; BALLAST, FOR ONE 8-WATT T-5 FLUORESCENT LAMP

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SHIPS).

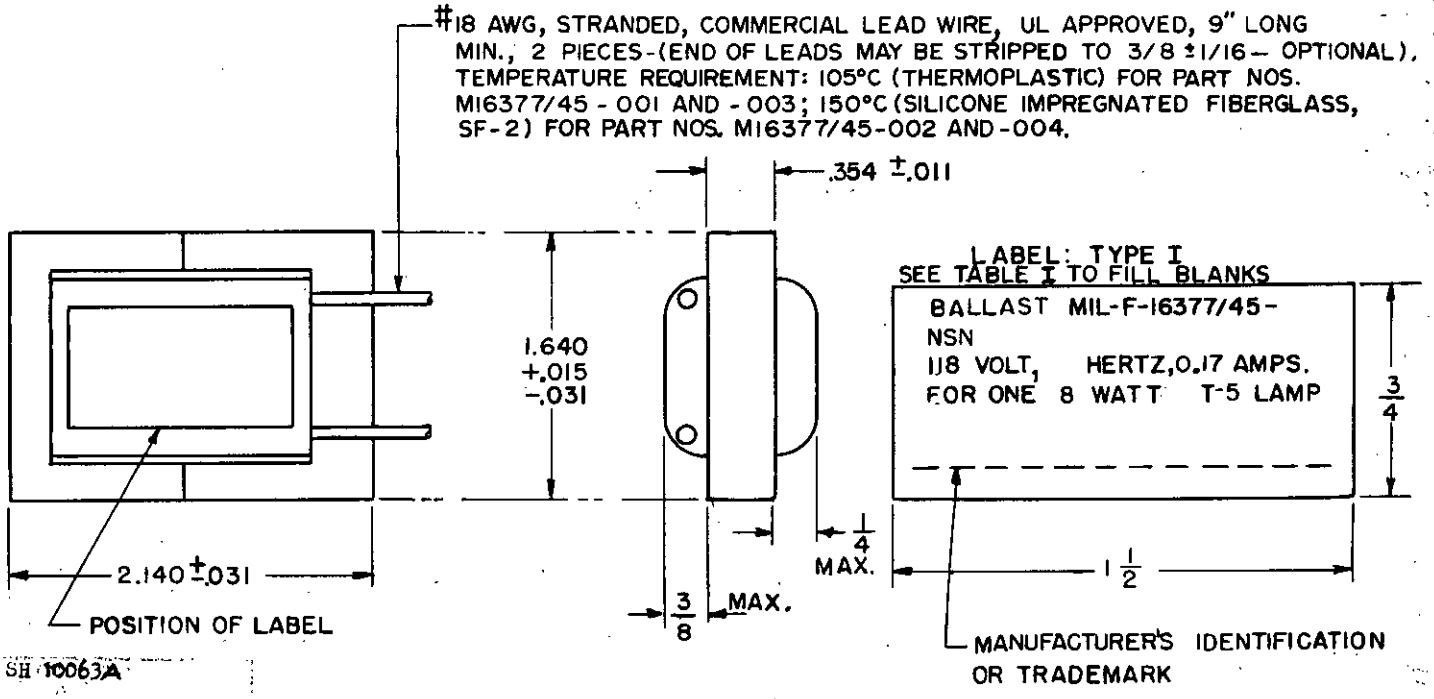


FIGURE 1. Ballast for one 8-watt T-5 fluorescent lamp.

(A) TABLE I. Ballast rating and general information.

Military Part Number M16377/45	Rating Volts	Amperes	Hertz	National Stock Number (NSN)	Remarks
001 1/	118	0.17	60	6250-00-295-2735	Standard
002	118	0.17	60		Heat Resistant
003	118	0.17	400		Standard
004	118	0.17	400		Heat Resistant

1/ Previously covered by MS16572.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

(A) denotes changes

FSC 6250

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:

Dimensions and configurations: See figure 1

(A) Assembly: The ballast shall consist of a laminated iron core and coil, integrally assembled and conforming to the dimensions and requirements shown herein. The ballast shall have a standard rating as shown on table I. Commercial U. L. approved ballast may be furnished if it conforms to the dimensions and requirements specified herein.

(A) Impregnating: The assembled ballast shall be submerged in coil varnish for sufficient time to insure complete penetration and baked. Impregnation is not required if nylon coated magnet wire, nylon bobbin, and oxide coated laminations are used.

Markings: Ballast shall conform to marking requirements and color coding of leads as specified in the applicable paragraph of American Standards Association (ASA) standard for "fluorescent lamp ballasts, number C82.1."

Label: Label shall be in accordance with type I except as specified herein.

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection:	See table II
Quality conformance:	
Comparison inspection:	Same as the first article inspection
Inspection of product for delivery:	(See table II for test procedures)
Examination:	See MIL-F-16377
Examination for preparation of delivery:	See MIL-F-16377

Quality conformance tests:

(a) Power output (except ratio peak current to r.m.s. current).
(b) Dielectric withstanding voltage.
(c) *Insulation resistance.*
(d) Voltage drop across ballast.

GENERAL INFORMATION:

Assignment of Military part numbers and general information is shown in table I.

TABLE II. First article and comparison inspection.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	3/
Performance:	1/	2/	3/
(a) Power output			
(b) Regulation			
(c) Noise			
(d) Voltage Drop across ballast			
Dielectric withstanding voltage	3.6.15	4.8.2	3/
Insulation resistance	3.6.16	4.8.3	3/

1/ The performance of the ballasts shall be in conformance with the requirements listed in the applicable paragraph of ASA standard for "fluorescent lamp ballasts, number C82.1" except for the following:
(a) *Power output when operated with an* 8-watt lamp shall be not less than 83 percent.
(b) Regulation when operated with an 8-watt lamp shall be not less than 79 percent or more than 115 percent

In addition to the above requirements the voltage drop across the ballast shall be no less than 84 volts.

2/ Test procedure:
(a) *Performance tests shall be made in accordance with* ASA standard measurement of fluorescent lamp ballast, number C82.2."
(b) Fluorescent lamp reference ballasts shall be in conformance with ASA standard for "fluorescent lamp reference ballasts, number C82.3."
(c) Lamps shall conform with approved ASA standard "dimensional and electrical characteristics of preheat start fluorescent lamps, number C78."
(d) Voltage across starter terminals and across ballast, when supplying a reference lamp, shall be measured.

3/ Sample lot size for inspection shall consist of five ballasts.

Preparing activity:
Navy - SH
(Project 6250-N160)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:49Z
Check the source to verify that this is the current version before use.