MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING; BALLAST AND STARTER BOX FOR FOUR 6-WATT OR 8-WATT FLUORESCENT LAMPS, T-5, WATERTIGHT, SYMBOLS 455 AND 455.1

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SH).

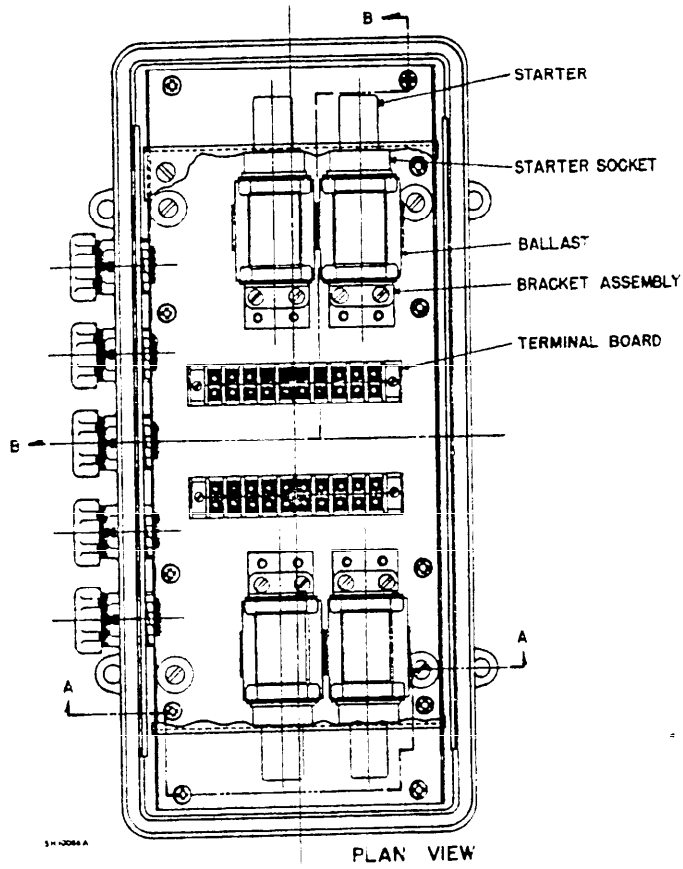


FIGURE 1. Ballast and starter box plan view (cover and baffle plate removed).

TABLE I. Ballast and starter box characteristics and general information.

Military Part Number M16377/47-	Ballasts shall be in accordance with MIL-F-16377/45	National Stock Number (NSN)	Circuit Use
455 1/	M16377/45-002		120 volts, 60 Hertz
455.1	M16377/45-004		120 volts, 400 Hertz

1/ Previously covered by MS17235.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

FSC 6250

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:49Z
Check the source to verify that this is the current version before use.

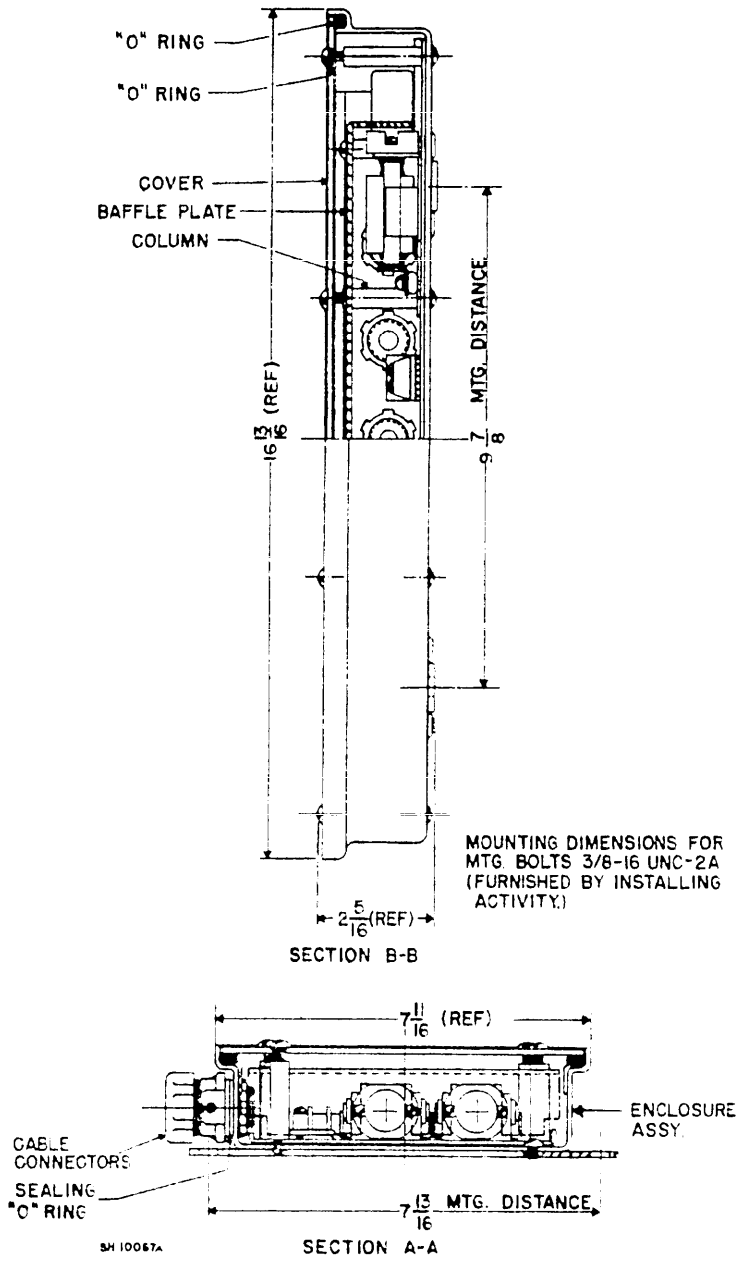


FIGURE 2. Ballast and starter box typical section views.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:49Z
Check the source to verify that this is the current version before use.

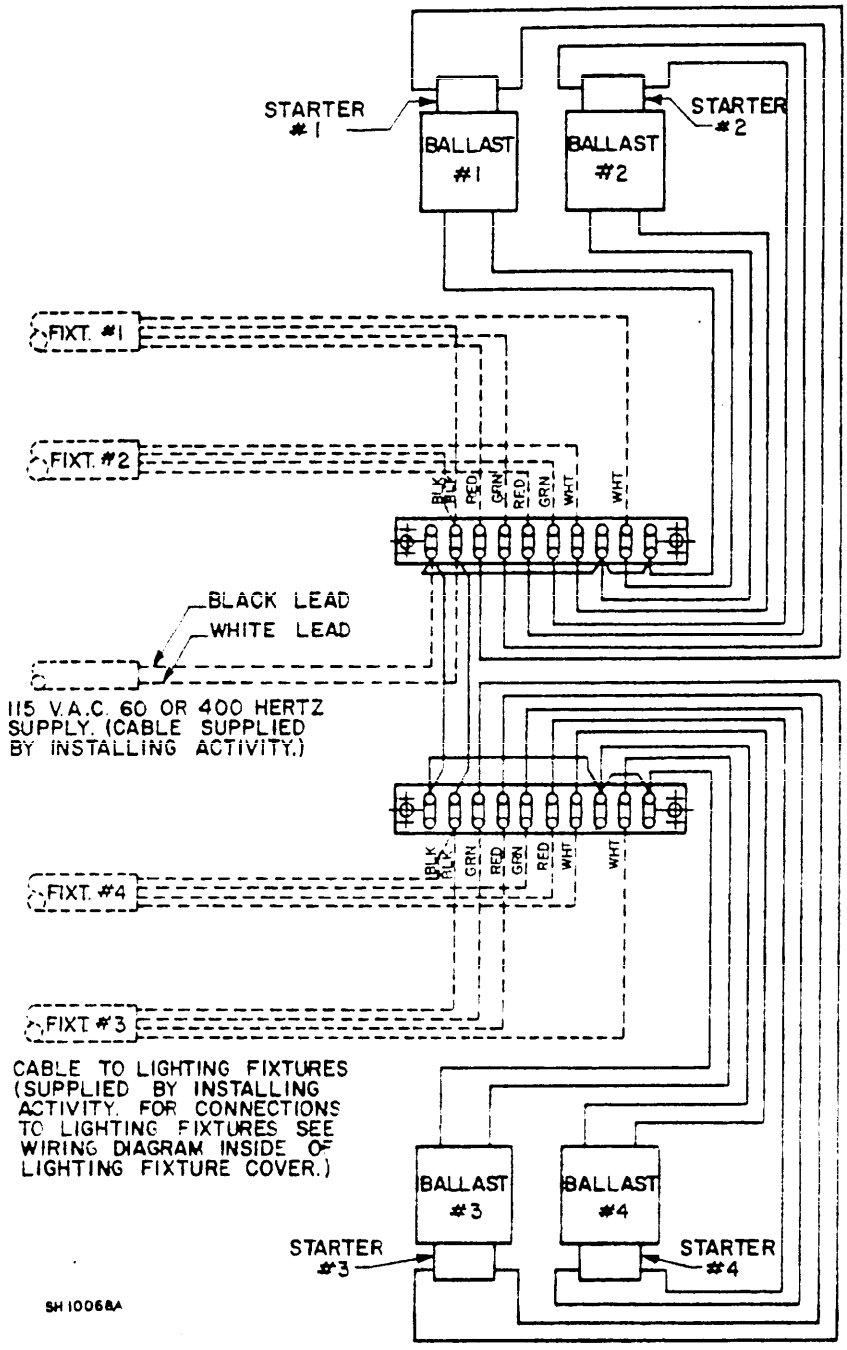


FIGURE 3. Wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:

Electrical rating: The unit shall be designed to operate on circuits as shown on table I.
Dimensions and configurations: See figures 1 and 2.
Materials: Enclosure assembly, baffle plate and cover: Aluminum Bracket assemblies: Ballast and starter socket retaining bracket assemblies shall be made of aluminum and phosphor bronze spring clips for retaining the ballasts. "O" rings: Commercial neoprene rubber. Sealing "O" ring: Silicone rubber.
Watergauge lights: The ballast and starter box shall be designed to operate four 6 watt or 8 watt watergauge lights, Symbols 151, 152, 153, 154 shown on MIL-F-16377/2 and MIL-F-16377/3.
Wiring diagram: See figure 3.
Operating temperature: 60°C min.
Effectiveness of enclosure: Watertight.
Terminal board: Type 8TB10 of MIL-T-55164/14.
Ballast: See table I.
Starter socket: MIL-L-970/13.
Starter: Type IV, in accordance with W-S-755 (commercial designation AT-58).
Cable connector: Aluminum, cable connectors shall accommodate cable type FSGU-3 of MIL-C-915/31.
Internal wiring: Internal wiring shall be furnished and installed. All internal wiring shall be AWG No. 18 stranded, commercial, high temperature wire FS-2, 150°C. min., UL approved.
Finish: All surfaces of enclosure assembly, cover and baffle plate shall receive a light gray baked-on enamel finish.
Labels: Type I shall be in accordance with MIL-F-16377.
Type III shall depict the wiring diagram of figure 3 and shall be attached to the inside of cover.

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection	See table II
Quality conformance:	
Comparison inspection:	Same as the first article inspection
Inspection of product for delivery:	
Examination:	See MIL-F-16377
Examination for preparation of delivery:	See MIL-F-16377
Quality conformance tests:	Operation, Dielectric withstanding voltage and insulation resistance.

GENERAL INFORMATION:

Assignment of Military part numbers and general information is shown in Table I.

TABLE II. First article and comparison inspection.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Enclosure effectiveness	3.5.11	4.8.14	Watertight
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Continuity of grounding	3.6.13.4	4.8.12	
Enclosure effectiveness	3.5.11	4.8.14	Watertight
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Temperature	3.5.17	4.8.19	

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity
Navy - SH
(Project 6250-N164)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:49Z
Check the source to verify that this is the current version before use.