MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING, FILTER ASSEMBLIES FOR DESK LIGHTS, ADJUSTABLE

RED AND WHITE SYMBOL 121.1 AND BLUE AND WHITE SYMBOL 121.2

This specification is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SH.).

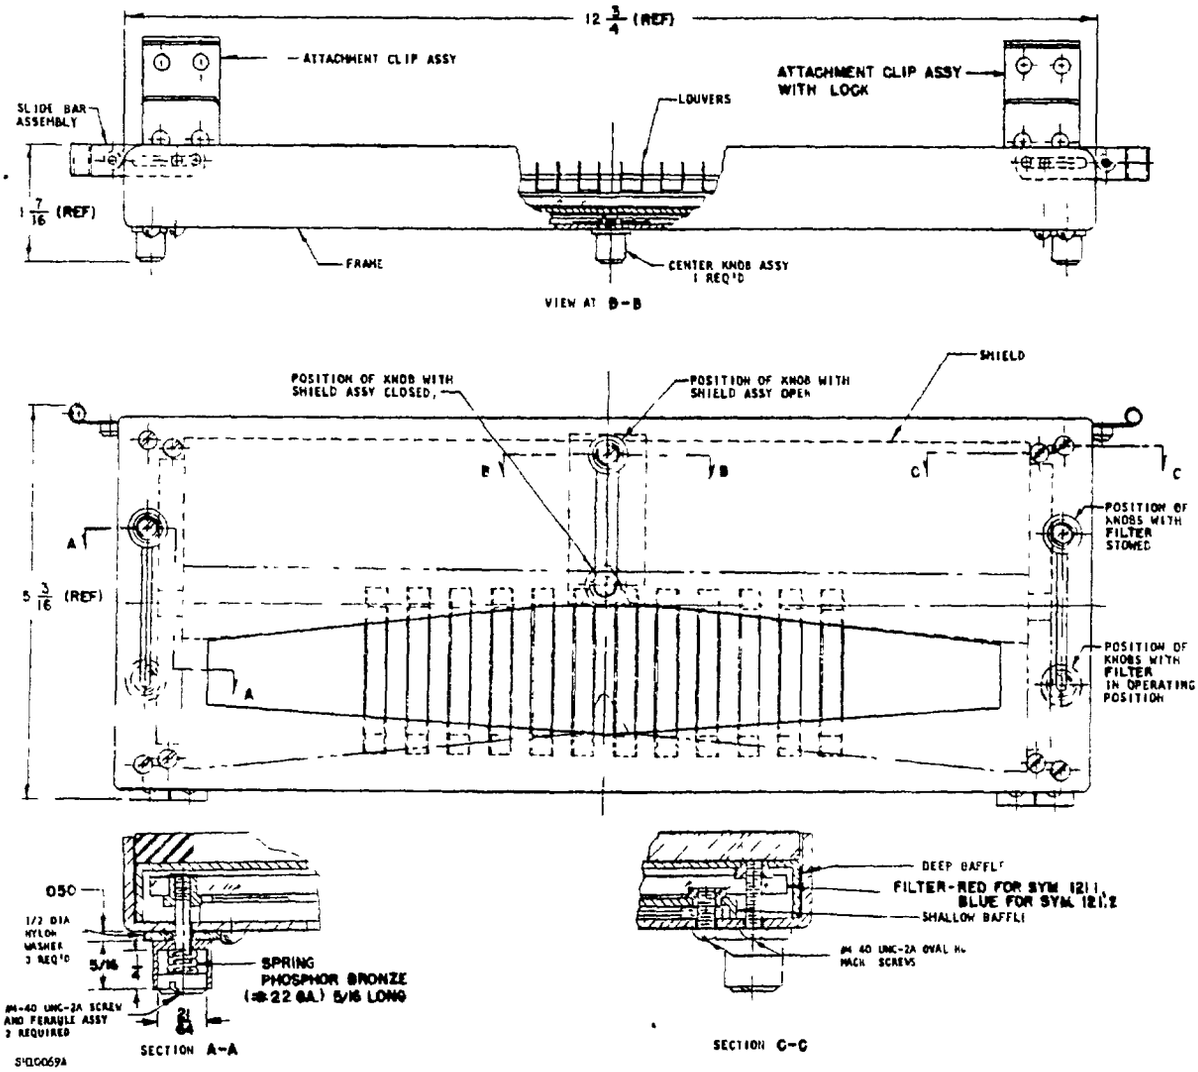


FIGURE 1. Filter assembly, Symbols 121.1 and 121.2.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:49Z
Check the source to verify that this is the current version before use.

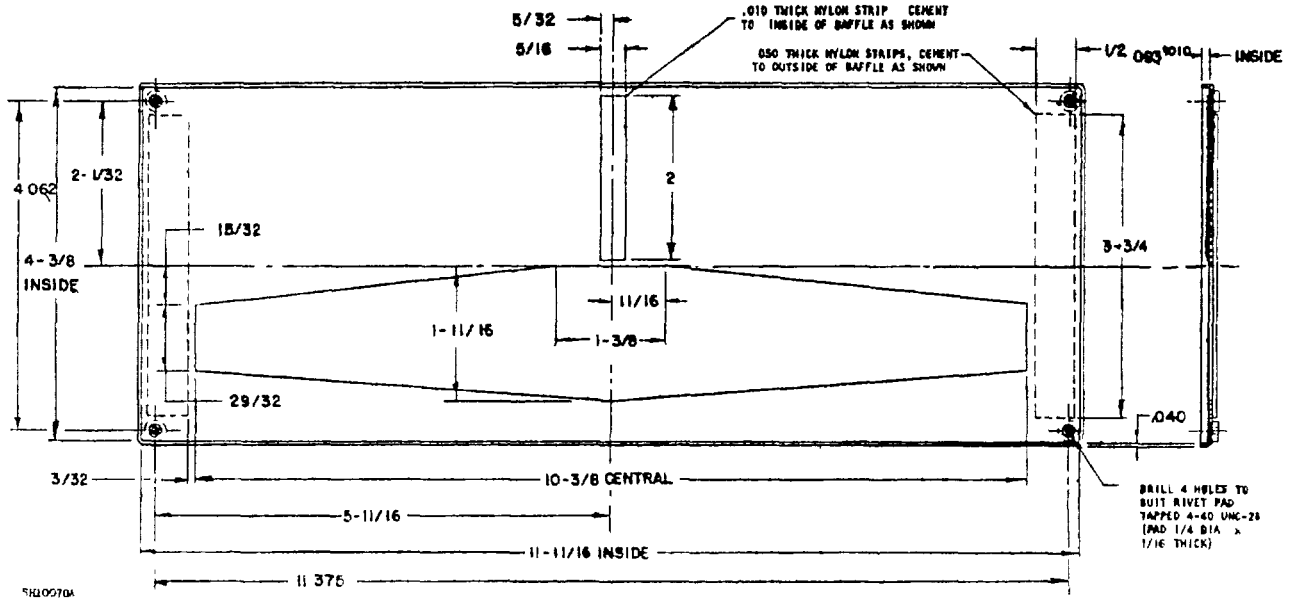


FIGURE 2. Shallow baffle assembly.

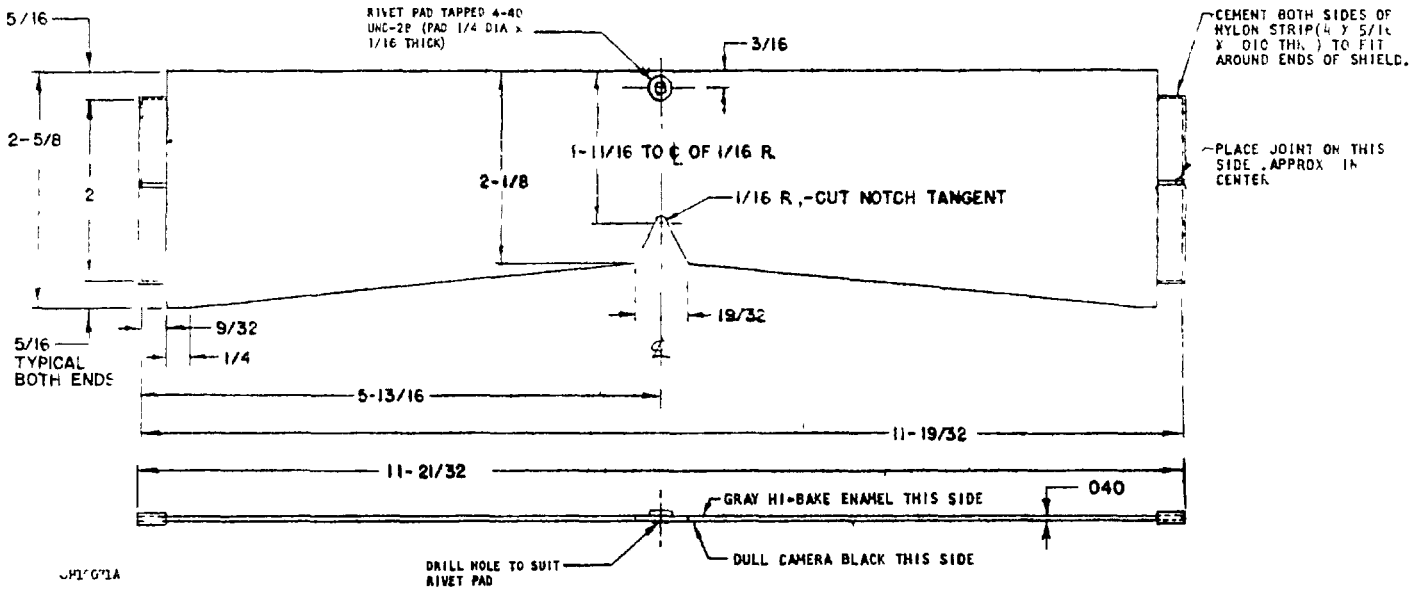


FIGURE 3. Shield assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:49Z
Check the source to verify that this is the current version before use.

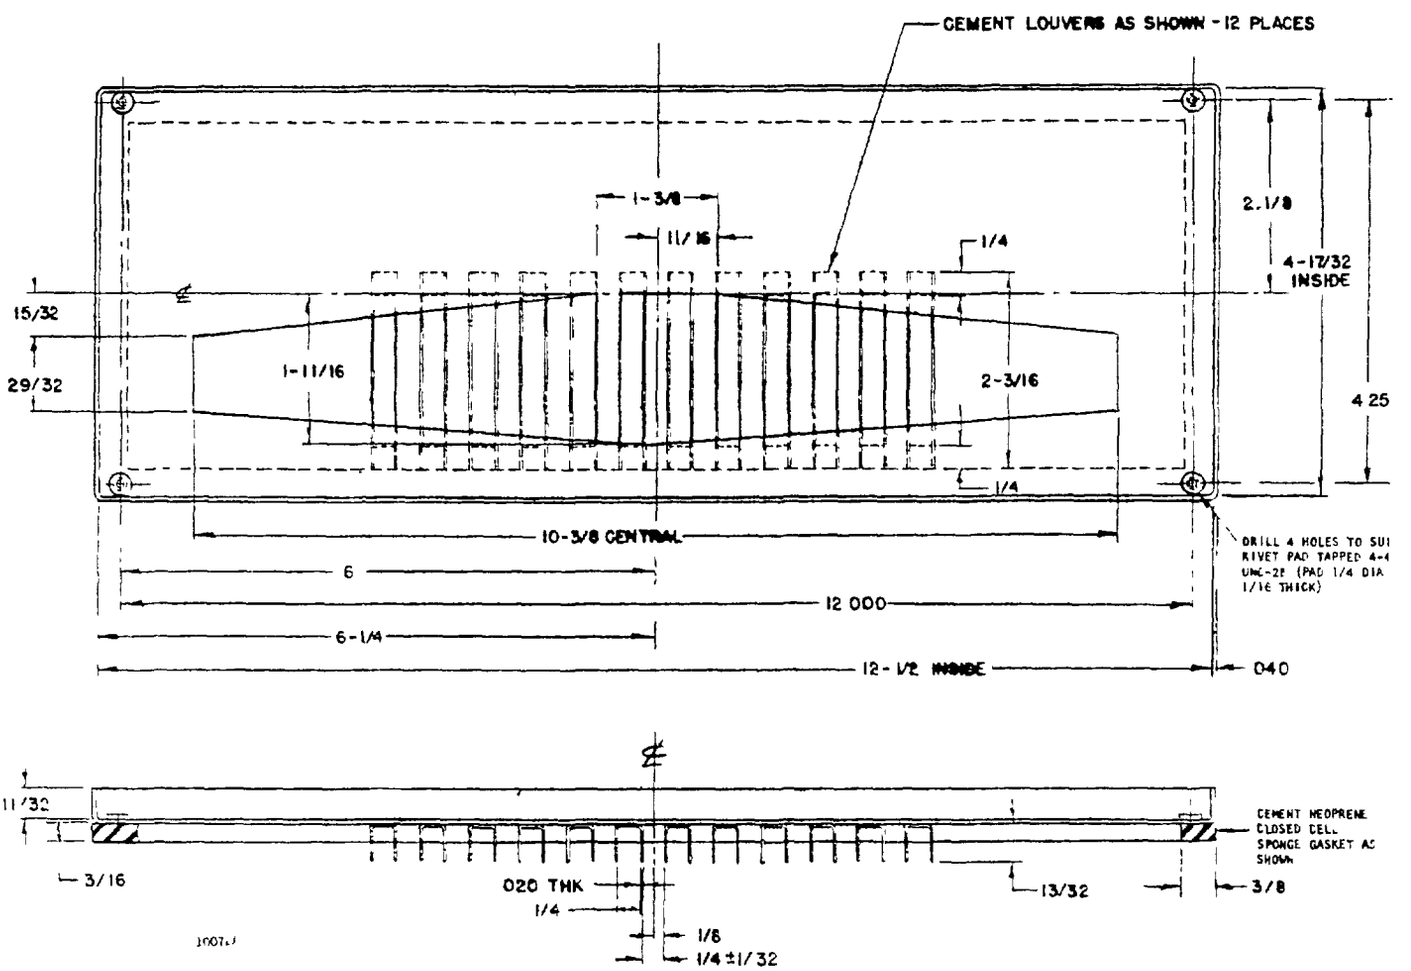


FIGURE 4. Deep baffle assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:49Z
Check the source to verify that this is the current version before use.


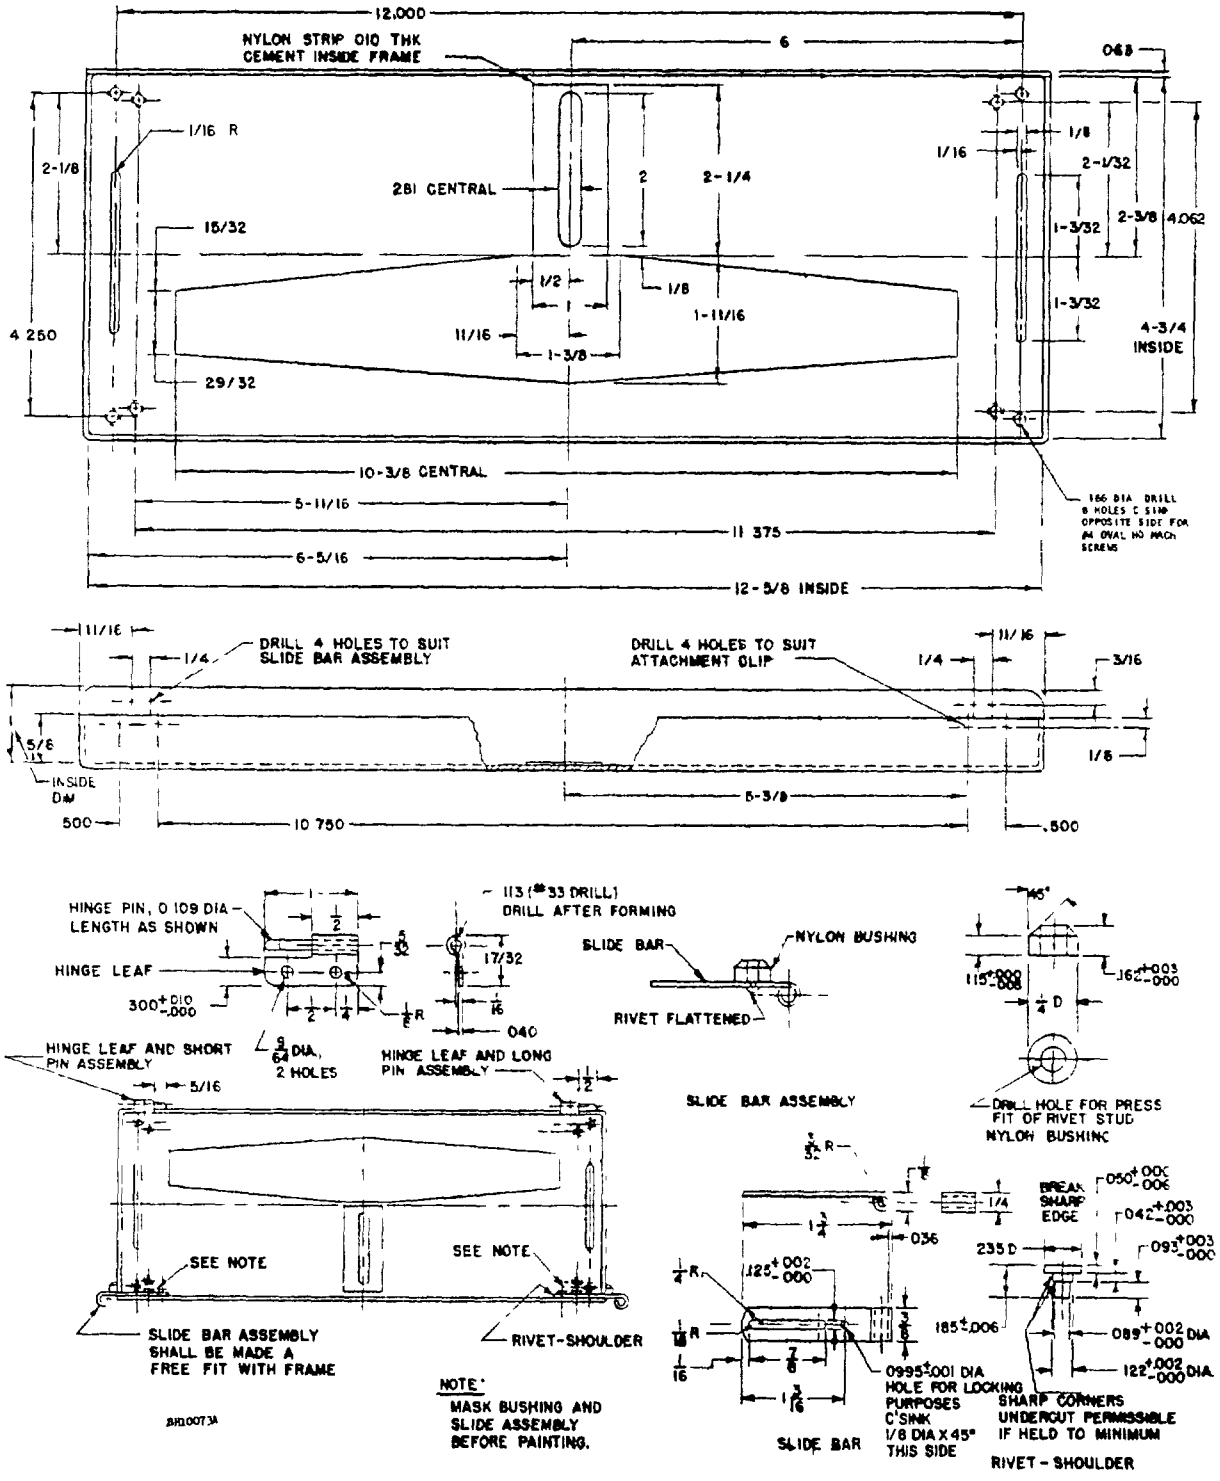


FIGURE 5. Frame assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:49Z
Check the source to verify that this is the current version before use.

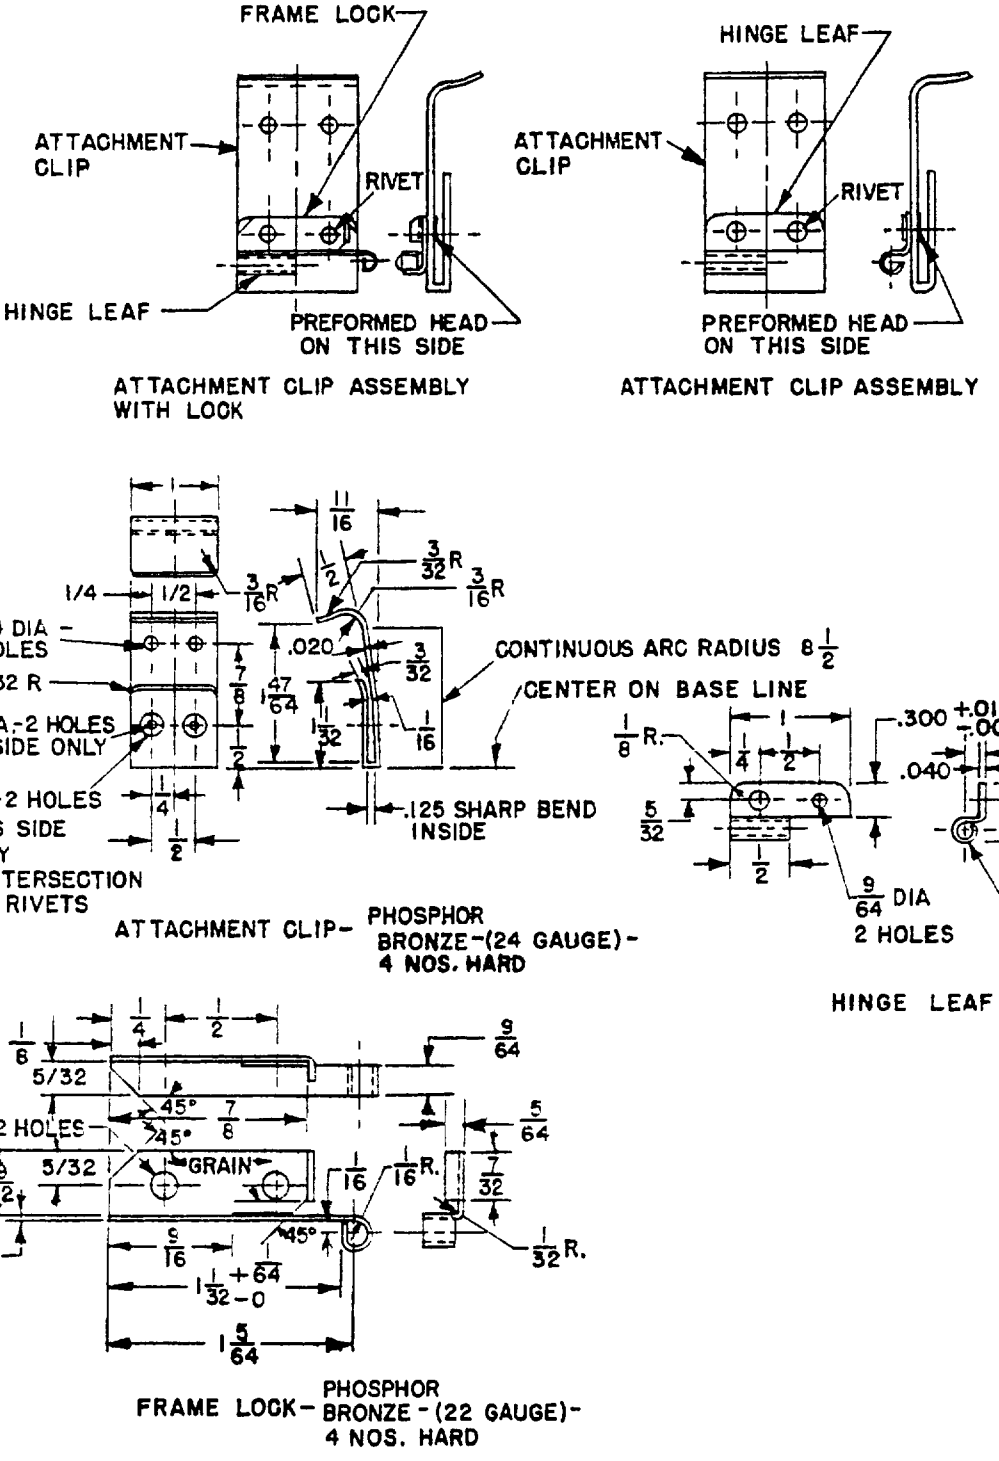

SH1007L4A

FIGURE 6. Attachment clip assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:49Z
Check the source to verify that this is the current version before use.


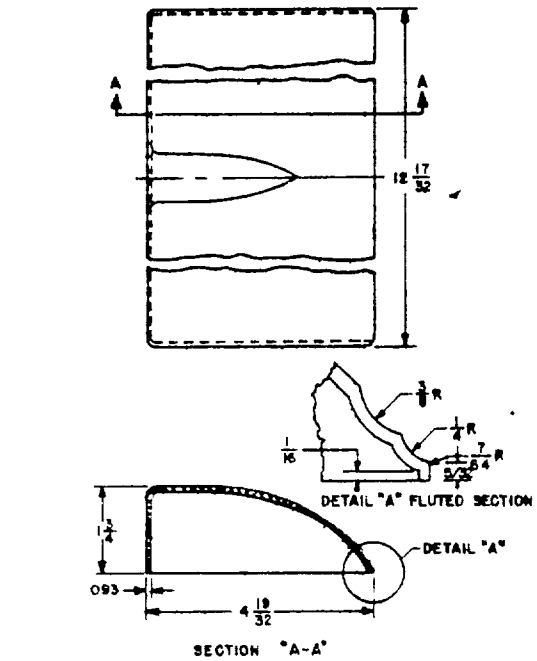


FIGURE 7. Desk light head.

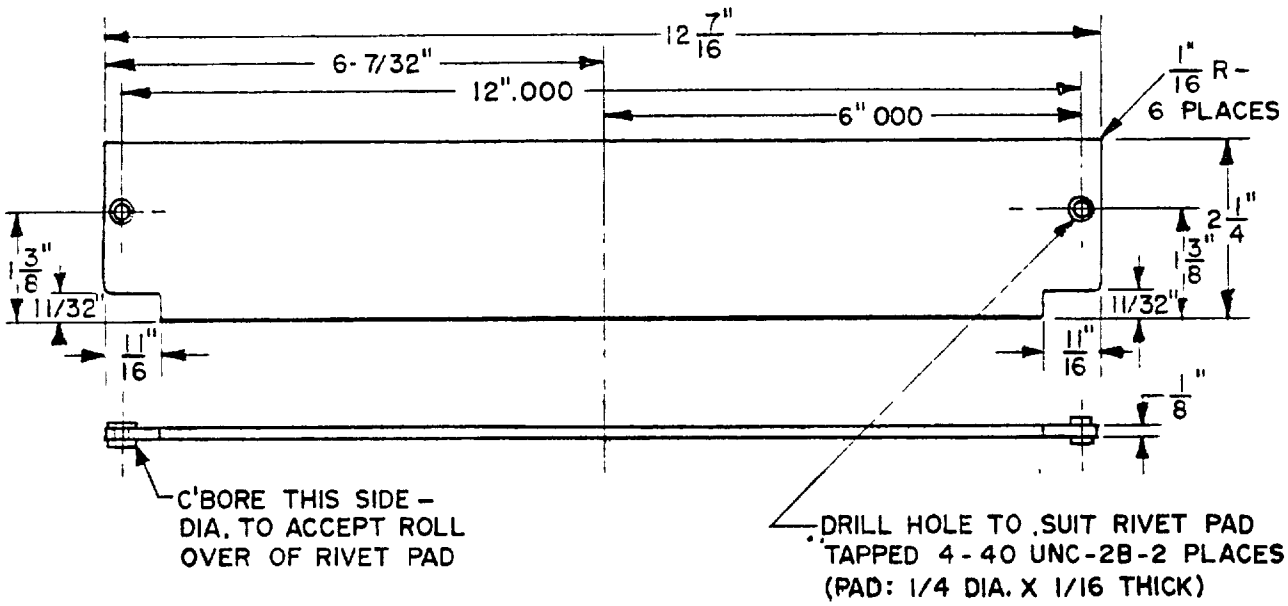

SYMBOL 121.1 - RED TRANSPARENT.

SH10076A SYMBOL 121.2 - BLUE TRANSPARENT.


FIGURE 8. Filter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:49Z
Check the source to verify that this is the current version before use.

INSTALLATION INSTRUCTIONS

CONTENTS

1. FRAME ASSEMBLY
2. HINGE BRACKET - WITH FRAME LOCK
3. HINGE BRACKET
4. FOUR 5/16 LONG 6-32 R.H.M.S
5. FOUR #6 WASHER EXTERNAL TOOTH
6. FOUR #6-32 HEX NUT

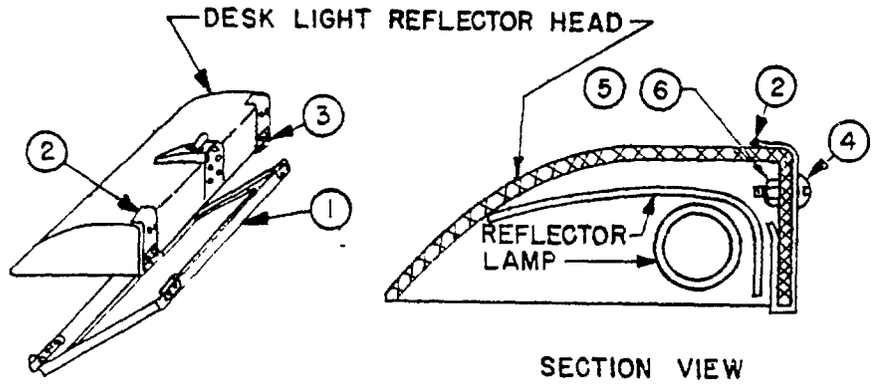

SH10077A

(a) REMOVE LAMP, STARTER AND REFLECTOR FROM DESK LIGHT REFLECTOR HEAD.
(b) SNAP HINGE BRACKET "2" IN POSITION AT EXTREME LEFT HAND SIDE OF REFLECTOR HEAD.
(c) SNAP HINGE BRACKET "3" IN POSITION AT EXTREME RIGHT HAND SIDE OF REFLECTOR HEAD.
(d) ENGAGE HINGE PINS OF FRAME ASSEMBLY "1" WITH HINGE BARREL OF "2" AND "3". ENGAGE LEFT HAND SIDE (LONG PIN) FIRST.
(e) USING HINGE BRACKETS "2" AND "3" AS A DRILL TEMPLATE, DRILL (4) 0.140 DIAMETER HOLES ONE AT A TIME THRU REFLECTOR HEAD. AFTER DRILLING EACH HOLE PLACE SCREW (HEAD ON BRACKET SIDE) INTO HOLE AND SECURE WITH WASHER AND HEX NUT.
(f) REPLACE REFLECTOR, STARTER AND LAMP.
(g) SWING FRAME ASSEMBLY CLOSED AND LATCH IN PLACE WITH TWO LOCKING SLIDES.

FIGURE 9. Installation instruction sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

SYMBOL NUMBERS:

121.1: Filter assembly for use with fluorescent desk lights, adjustable for red and white illumination.

121.2: Filter assembly for use with fluorescent desk lights, adjustable for blue and white illumination.

DESIGN:

Dimensions and configurations: See figures 1 through 8. The filter assembly shall be designed to mount on a desk light head shown on figure 7. The filter assembly attachment clips and slide bars shall be so designed as to hold the filter firmly against the desk light head, allowing no light to escape from the sides.

Material: Frame, baffles, shield, knobs and knob screws shall be aluminum; other items as specified on the applicable figures.

Filter. See figure 8 Material shall be acrylic plastic sheet as follows:

Symbol 121.1 Red transparent, 1/8 inch thick, type RTPS-1 of MIL-P-24191.

Symbol 121.2 Blue transparent, 1/8 inch thick, type BTPS-1 of MIL-P-24191.

Weight: 1 pound 8 ounces maximum.

Finishing: Frame assembly shall be painted with grey HI-Bake enamel outside, Dull Camera Black inside. Shield assembly, shall be painted Grey Hi-Bake enamel on exposed side, Dull Camera Black inside. Shallow and deep baffle assemblies shall be painted Dull Camera Black all over See 3 8.3.4 and 3.8 3.4 (b) of MIL-F-16377.

Instruction sheet An installation instruction sheet as shown on figure 9 shall be furnished with each filter assembly

Labels One type 1 label shall be furnished in accordance with MIL-F-16377.

QUALITY ASSURANCE

Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection	See table I
Quality conformance	
Comparison inspection	Same as the first article inspection.
Inspection of product for delivery.	
Examination	See MIL-F-16377
Examination for preparation of delivery	See MIL-F-16377
Quality conformance tests	Optical uniformity only

GENERAL INFORMATION.

(a) The window frame and shield assembly shown is designed to mount on head of desk lights, MIL-F-16377/15, MIL-F-16377/16, MIL-F-16377/19 The addition of this assembly converts any such desk light for red and white illumination (for chartboard use) or blue and white illumination (for use in command information center (cic) blue illumination) as applicable. Adjustment of the shield, using the center knob, controls the amount of light falling on a surface Sliding the filter over the opening by using the side knobs converts this fixture for low level illumination (red or blue as applicable)

(b) Military part number for Symbol 121.1: M16377/48-121.1

(c) Military part number for Symbol 121 2 M16377/48-121.2

(d) National Stock number Symbol 121 1 NSN6230-00-548-2040, Symbol 121.2, NSN6230-00-514-0905

(e) Previously covered by MS16721.

TABLE I. First article and comparison inspection

Test	Requirement paragraph	Test paragraph	Remarks
Examination	3 13	4.5	
Operation	3.13	4.8	
Optical uniformity	3.7.4.2.1	4.8.4	
Color and luminous transmittance	3.7.3	4.8.6.3	
Magnetic permeability	3.4.8	4.8.18	
Shock	3.5.12	4.8.7	1/
Vibration	3.5.13	4.8.8	2/

1/ Filter assembly shall meet grade "B" shock when tested installed on desk light, Symbol 141.2 shown on MIL-F-16377/16. Opening of filter assembly from desk light head (hanging) during this test shall not constitute a failure.

2/ Filter assembly shall be installed on desk light Symbol 141.2 shown on MIL-F-16377/16. Filter assembly shall not be detached from the desk light head during this test.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:49Z
Check the source to verify that this is the current version before use.

Preparing activity:
Navy - SH