
PROJECT NO. 1660-N047


FED. SUP CLASS
1660

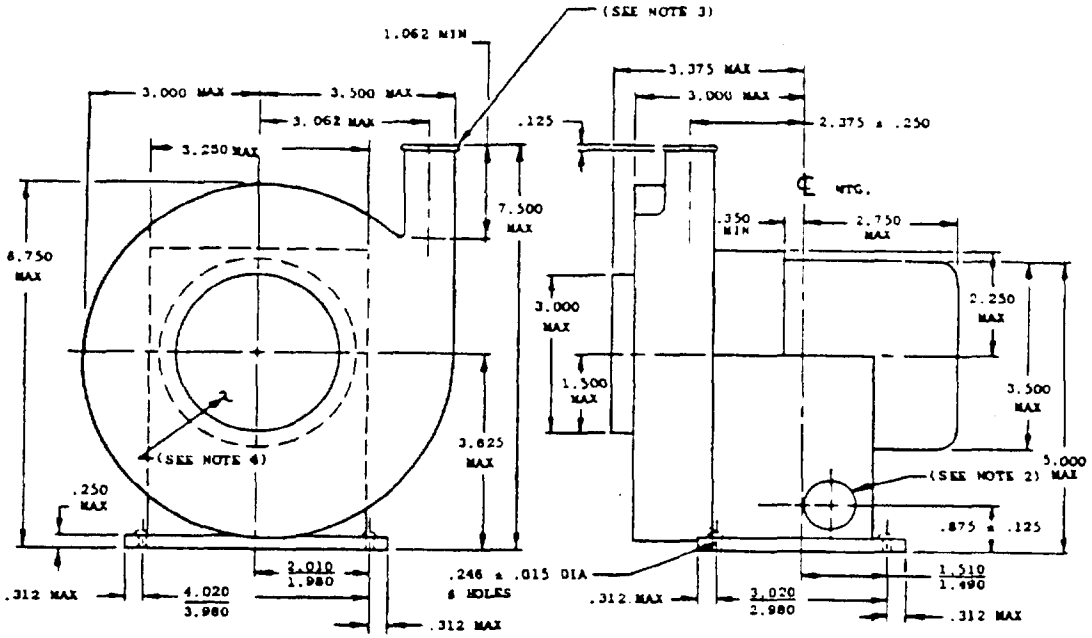

FOR ANY COMBINATION OF CONDITIONS LISTED BELOW, THE BLOWER OUTPUT SHALL REMAIN WITHIN THE INDICATED LIMITS				
CONDITIONS	BLOWER OUTPUT MINIMUM LIMITS			
	SEA LEVEL		ALTITUDE	
	CFM	Pe(WG)	CFM	Pe(WG)
INPUT VOLTAGE VARIED BETWEEN 24 AND 29 VOLTS AMBIENT TEMPERATURE VARIED FROM 10°C TO 43°C AT ANY ALTITUDE VARIED FROM SEA LEVEL TO 20,000 FT	16	13	16	7

INPUT	
VOLTAGE DC (NOMINAL)	28 VOLTS
WATTS (MAXIMUM)	300
OUTPUT	
CFM [NOMINAL SEA LEVEL AT 13 IN. W.G. (WATER GAUGE) STATIC HEAD (Pe)]	16 CFM
WEIGHT LBS MAXIMUM	6

DASH NO.	PROCUREMENT DATA
-1	SEE NOTE 7
-2	BRUSHLESS FOR NEW PROCUREMENT



WIRING SCHEMATIC (SEE NOTE 2)

NOTES:

1. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.031. IN ACCORDANCE WITH MIL-STD-8.
2. RECEPTACLE TO FIT PLUG MS3106R-10SL-3S. LOCATED WITHIN .500 INCH OF VERTICAL CENTER LINE
3. 1.062 MIN. LENGTH WITH 7/8 OD SPOUT WITH .951 $^{+.010}_{-.015}$ OD BEAD ON END OF SPOUT. IT MUST BE POSSIBLE TO ROTATE SPOUT THROUGH 360° AROUND THE ROTATIONAL AXIS OF THE MOTOR AND TO LOCK IT AT ANY POINT
4. THE AIR INTAKE SHALL BE SCREENED SO THAT A 1/4 INCH DIA ROD WITH AN END SURFACE CUT AT 90° TO THE ROD AXIS CANNOT BE FORCED INTO CONTACT WITH A MOVING PART WHEN A 5 LB FORCE IS EXERTED ON THE ROD
5. THE WEIGHT AND VOLUME LIMITATIONS SHOWN ON THIS DRAWING INCLUDE ALL AUXILIARY APPARATUS NECESSARY TO MAKE THIS UNIT CONFORM TO THE PROCUREMENT SPECIFICATION
6. COLOR THE EXTERIOR OF THE UNIT SHALL BE FLAT BLACK.
7. MS17269-1 BLOWERS ARE INACTIVE FOR DESIGN AND PROCUREMENT AFTER AUG 10, 1966. USE MS17269-2 FOR DESIGN AND REPLACEMENT. EXISTING STOCKS OF MS17269-1 MAY BE USED UNTIL STOCKS ARE DEPLETED

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

(L) STANDARD REVISED

APPROVED 15 MAY 1961 — REVISED (K) 10 Jan 1968 (L) 15 May 1975

P.A. NAVY - AS Other Cust	TITLE BLOWER, D.C. BRUSHLESS, CONTINUOUS DUTY, GARMENT VENTILATION, MARK 5, ANTI-EXPOSURE SUIT	MILITARY STANDARD MS17269 (AS)
PROCUREMENT SPECIFICATION: SUPERSEDES MIL-B-81565(AS)		SHEET 1 OF 1

DD FORM 672-1

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by all activities of the Navy and all other military activities are required to employ this standard where suitable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:05Z
Check the source to verify that this is the current version before use.