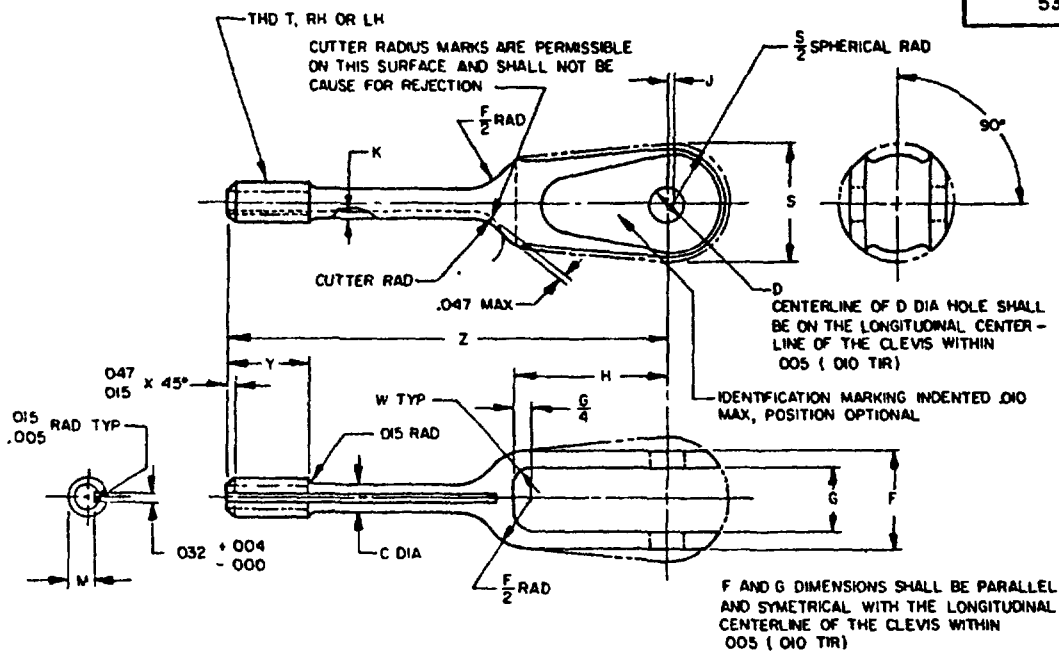


(J)

DASH NO DIRECTION OF THREAD RH	DASH NO DIRECTION OF THREAD LH	WIRE ROPE DIA REF	MIN BREAKING STRENGTH LB	MATCHES BEARING NO REF	THREAD T UNF-3A	C +.000 -.006 DIA	D +.002 -.000 DIA	F +.010 -.005	G ±.005	H	J +.010 -.000	K MAX	M MAX	M MIN	S SPHER DIA +.125 -.110	W RAD	Y ±.047	Z ± 0
-3RS	-3LS	3/32	1600	MS27640-KP3	NO. 10-32	.139	.190	.500	.312	1.062	.031	.0077	.1638	.1568	.750	.156	.500	2.3
-3RL	-3LL																	3.1
-4RS	-4LS	1/8	2200	MS27640-KP4	1/4 -28	.195	.250	.750	.500	1.188	.047	.0103	.2224	.2152	.875	.188	.625	2.5
-4RL	-4LL																	3.4
-5RS	-5LS	5/32	3200									.0064	.2830	.2754			.750	2.6
-5RL	-5LL				5/16 -24	.249												3.5
-6RS	-6LS	3/16	4600	MS27640-KP5			.313	.813	.563	1.313					1.000			2.7
-6RL	-6LL																	3.6

[illegible] STEEL, MIL-S-6758
[illegible] TREATMENT CADMIUM PLATE, QQ-P-416, TYPE 2, CLASS 3
HEAT TREATMENT 125,000 TO 145,000 PSI, MIL-H-6875
THREAD DATA THREADS IN ACCORDANCE WITH MIL-S-7742
REMOVE ALL BURRS AND SHARP EDGES
DIMENSION IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES DECIMALS ± .010, ANGLES ±1/2°

FIRST LETTER FOLLOWING DASH NUMBER INDICATES DIRECTION OF THREAD (LEFT OR RIGHT), SECOND LETTER FOLLOWING DASH NUMBER INDICATES LENGTH (SHORT OR LONG)
EXAMPLE OF PART NUMBER
MS21253-3LS = FORK, TURNBUCKLE, NO 10-32 LEFT HAND THREAD, SHORT
MS21253 ITEMS CAN REPLACE AN162 ITEMS OF LIKE DASH NUMBERS, BUT THE AN162 ITEMS CANNOT REPLACE THE MS21253 ITEMS.
MS21253 ITEMS ARE UNIVERSALLY INTERCHANGEABLE WITH NAS 646 ITEMS OF LIKE DASH NUMBERS

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

User activities NAVY - MC
Review activities DISC-15
THIS MILITARY STANDARD IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENTHFERIN AND DESIGN APPLICATIONS AND FOR REFERENCE SHALL BE MADE FROM THIS DOCUMENT

P.A. USAF-82	TITLE	MILITARY STANDA
Other Cust (J) NAVY-AS ARMY-AV USAF-99	CLEVIS END, TURNBUCKLE, CLIP LOCKING, (FOR BEARING)	MS21253
PROCUREMENT SPECIFICATION MIL-T-8878	SUPERSEDES AN162, NAS646 (SEE NOTES)	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.