
FED. SUP CLASS
4730

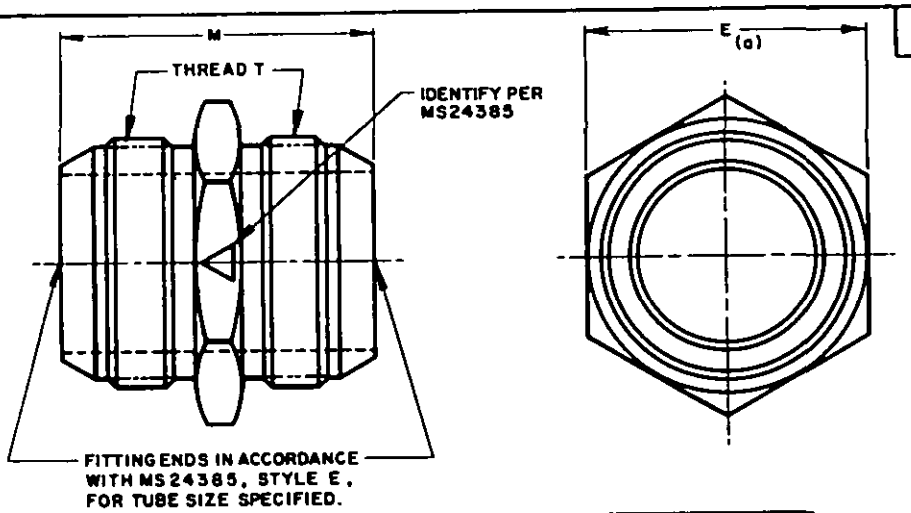

DASH NO.	TUBING OD	THREAD T (REF)	E	M
2	1/8	5/16-24UNJF-3A	.563	1- 7/32
3	3/16	3/8 -24UNJF-3A	.625	1- 7/32
4	1/4	7/16-20UNJF-3A	.688	1- 1/4
5	5/16	1/2 -20UNJF-3A	.750	1- 9/32
6	3/8	9/16-18UNJF-3A	.813	1- 3/8
8	1/2	3/4 -16UNJF-3A	1.000	1- 9/16
10	5/8	7/8 -14UNJF-3A	1.125	1-53/64
12	3/4	1-1/16-12UNJ -3A	1.375	2- 7/64
16	1	1-5/16-12UNJ -3A	1.625	2- 3/16
20	1-1/4	1-5/8 -12UNJ -3A	1.875	2- 9/32
24	1-1/2	1-7/8 -12UNJ -3A	2.125	2-17/32
28	1-3/4	2-1/4 -12UNJ -3A	2.500	2-13/16
32	2	2-1/2 -12UNJ -3A	2.750	3- 1/16
40	2-1/2	3- -12UNJ -3A	3.250	2- 7/8
48	3	3-1/2 -12UNJ -3A	3.750	3- 1/16

(a) FOR HEX TOLERANCE SEE MS24385.
MATERIAL:: STEEL; ALUMINUM ALLOY; CORROSION RESISTANT STEEL (CRES); TITANIUM ALLOY; BARS, SHAPES, OR FORGINGS (SEE PROCUREMENT SPECIFICATION).
FINISH: SEE PROCUREMENT SPECIFICATION.
BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.
NO CODE LETTER IN PART NUMBER FOR STEEL.
ADD D IN PLACE OF DASH FOR ALUMINUM ALLOY (EXCEPT 7075-T73).
ADD J IN PLACE OF DASH FOR CRES, TYPE 304.
ADD K IN PLACE OF DASH FOR CRES, TYPE 316.
ADD S IN PLACE OF DASH FOR CRES, TYPE 347.
ADD T IN PLACE OF DASH FOR TITANIUM ALLOY.
ADD W IN PLACE OF DASH FOR 7075-T73 ALUMINUM ALLOY.
TITANIUM IS NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.
EXAMPLE OF PART NUMBERS:
MS24392-8 - NIPPLE, 1/2 TUBING, STEEL.
MS24392D8 - NIPPLE, 1/2 TUBING, ALUMINUM ALLOY (EXCEPT 7075-T73).
MS24392J8 - NIPPLE, 1/2 TUBING, CRES, TYPE 304.
MS24392K8 - NIPPLE, 1/2 TUBING, CRES, TYPE 316.
MS24392S8 - NIPPLE, 1/2 TUBING, CRES, TYPE 347.
MS24392T8 - NIPPLE, 1/2 TUBING, TITANIUM ALLOY.
(F) MS24392W8 - NIPPLE, 1/2 TUBING, 7075-T73 ALUMINUM ALLOY.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE ON FRACTIONS ±1/64.

F Denotes Changes

APPROVED 12 FEB 57 REVISED (A) 6 MAR 58 (B) 10 FEB 67 (C) 7 OCT 68 (D) 16 JUN 78 (E) 22 MAR 79 (F) 16 Apr 82

This Military Standard is approved for use by HQ AFLC CASD/LODS, Federal Center, Battle Creek, MI 49016, Department of the Air Force, and is available for use by all Departments and agencies of the Department of Defense.

Review activities: ARMY - ME, AV
NAVY - AS
DSC - CS

User activities:

P.A. AIR FORCE - 99 (F)	TITLE	MILITARY STANDARD
Other Cust AIR FORCE - 99	NIPPLE, TUBE, PRECISION TYPE	MS24392
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES: -AN-816 (F)	SHEET 1 OF 2

DD FORM 672-1 Limited Coordination

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4730-F273

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

IN ADDITION TO THE SAMPLING REQUIREMENTS OF THE PROCUREMENT SPECIFICATION, THE SURFACE OF THE CONE ENDS ON 100% OF THE NIPPLES OF A LOT SHALL BE INSPECTED.
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 12 FEB 87 REVISED (F) FOR CHANGES SEE PAGES 1 & 2. 16 Apr 82

Review activities: ARMY - ME, AV
NAVY - AS
DSC - CS

User activities:

This Military Standard is approved for use by HQ AFLC CASO/LODS, Federal Center, Battle Creek, MI 49016, Department of the Air Force, and is available for use by all Departments and agencies of the Department of Defense.

P.A. AIR FORCE-99 (F) Other Cost AIR FORCE-99	TITLE NIPPLE, TUBE, PRECISION TYPE	MILITARY STANDARD MS24392
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES ~~AN816~~ (F)	SHEET 2 OF 2

DD FORM 672-1 Limited Coordination

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4730-F273

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.