

FED. SUP CLASS 6210 (G)

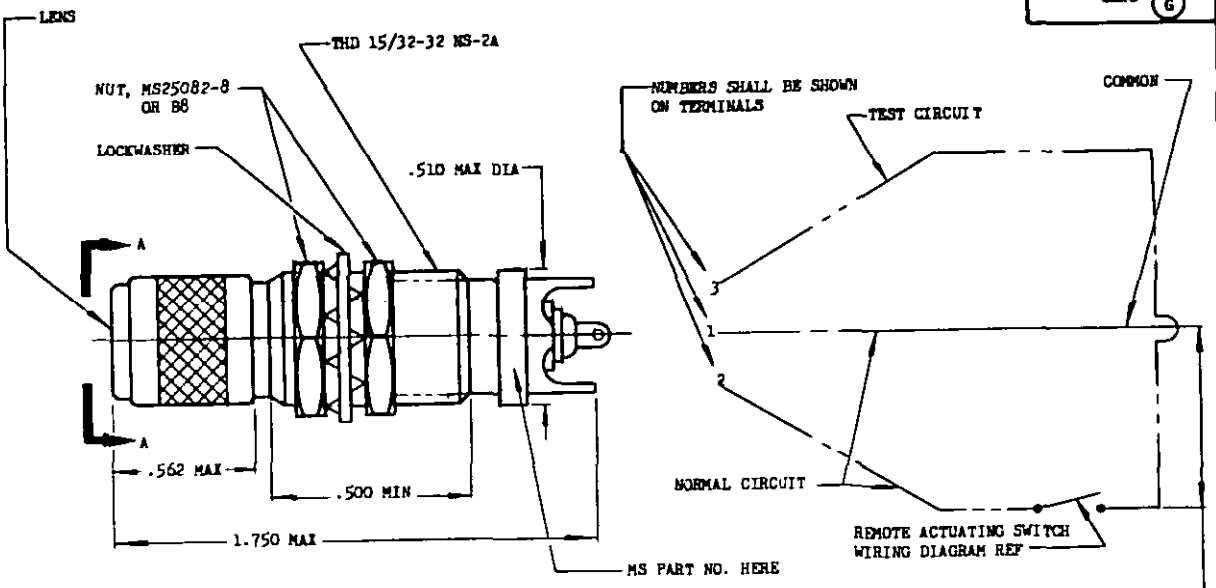

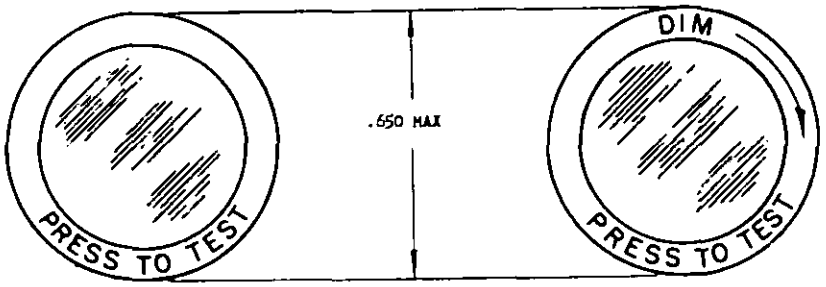

WITHOUT DIMMER

VIEW A-A

WITH DIMMER

DASH NO.		LENS COLOR
WITH DIMMER FEATURE	WITHOUT DIMMER FEATURE	
-1	-5	COLORLESS
-2	-6	RED
-3	-7	GREEN
-4	-8	YELLOW
-10	-11	BLUE
-12	-13	NVG GREEN *

LAMP REF	
PART NO.	VOLTAGE
MS25237-327	28
MS25237-328	6

DIMENSIONS IN INCHES.

THE PART NUMBER MARKED ON THE ASSEMBLY SHALL BE THAT OF THE COMPLETE ASSEMBLY, LESS LAMP.
THE PART NUMBER FOR THE ASSEMBLY WITH LAMP SHALL CONSIST OF THE MS PART NUMBER FOR THE ASSEMBLY WITH AN ADDITIONAL DASH NUMBER, WHICH IS THE TRADE NUMBER OF THE LAMP.
EXAMPLE OF PART NUMBER: MS25041-2-327 - LIGHT, INDICATOR, PRESS TO TEST, WITH LAMP.
THE PART NUMBER FOR THE ASSEMBLY WITH LAMP SHALL BE MARKED ON THE SHIPPING CONTAINER ONLY.

(G) * NVG Green (Night Vision Goggle Green) Lens color for -12 and -13 shall have spectral transmission characteristics corresponding to the following requirements.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 16 Oct 53 — REVISED (A) 24 Nov 53 (B) 22 Mar 54 (C) 7 Mar 56 (D) 23 May 58 (E) 25 May 59 (F) 20 Oct 61 (G) 24 DEC 85

USER ACTIVITIES: ARMY - AT, ME
REVIEWER ACTIVITIES DLA - GS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF - 82 Other Cust Navy - AS AF - 99	TITLE LIGHT, INDICATOR, PRESS TO TEST, SMALL	MILITARY STANDARD MS25041
PROCUREMENT SPECIFICATION MIL-L-7961	SUPERSEDES:	SHEET 1 OF 2

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:02Z
Check the source to verify that this is the current version before use.

Project No.6220-0340

(G) Peak transmission:

The peak transmission of the filter on a graph of measured transmission versus wavelength shall be 60% ± 3%.

Peak wavelength: The wavelength at which peak transmission occurs on a graph of measured transmission versus wavelength shall be 480 ± 20 nanometers.

Red transmission: The % of transmission for each wavelength shown shall not be exceeded. The percentage of transmission for the wavelengths between two corresponding numbers shall not exceed the higher of the two corresponding transmittance numbers. Wavelengths are in nanometers.

Wavelength (NM)	Transmittance	Wavelength (NM)	% Transmittance
550	25	900	0.005
600	5	950	0.014
650	0.11	1000	0.048
700	0.009	1050	0.127
750	0.002	1100	0.308
800	0.002	1150	0.660
850	0.003	1200	1.2

User activities: ARMY - AT, ME
Review activities: DLA - GS
This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use should be made from this document.

APPROVED REVISED (G) FOR CHANGES SEE SHEETS 1 AND 2

P.A. USAF - 82
Other Cust
Navy - AS
AF - 99
PROCUREMENT SPECIFICATION
MIL-L-7961

TITLE
LIGHT, INDICATOR, PRESS TO TEST, SMALL

SUPERSEDES:

MILITARY STANDARD
MS 25041
SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:02Z
Check the source to verify that this is the current version before use.