INCH-POUND

MS27487F
6 August 2012
SUPERSEDING
MS27487E
12 July 2002


DETAIL SPECIFICATION SHEET

CONNECTORS, ADAPTER, ELECTRICAL, THREADED, KIT, STRAIGHT AND 90 DEGREES, EMR HARDWARE, SERIES I AND II

Inactive for new design after 6 August 2012. For new design for 90 degree type adapter only, use SAE-AS85049/32.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

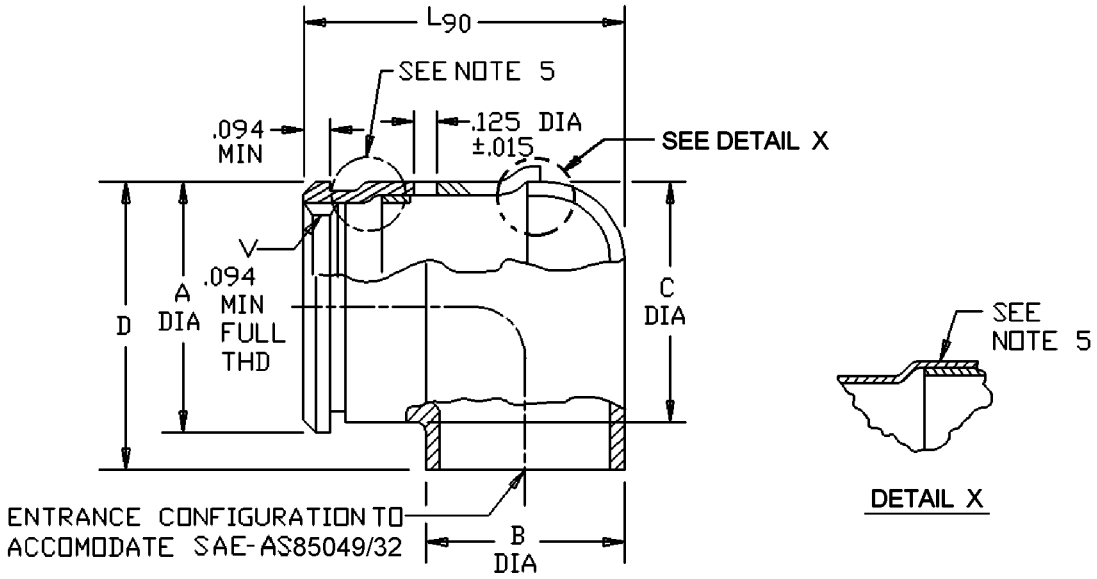


90° ELBOW ADAPTER

FIGURE 1. Adapter.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

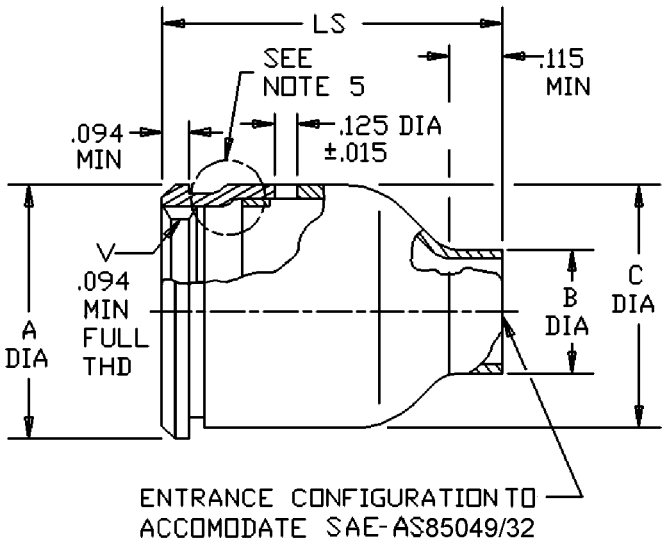

STRAIGHT ADAPTER

FIGURE 1. Adapter – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

Shell size series I	Shell size series II	A dia max	B dia max	C dia max	D dia max	LS max	L_{90} max	V Thread UNEF class 2B
9	8	.594 (15.09)	.359 (9.12)	.516 (13.11)	.656 (16.66)	.844 (21.44)	.719 (18.26)	.4375-28
11	10	.719 (18.26)	.406 (10.31)	.641 (16.28)	.781 (19.84)	.969 (24.61)	.766 (19.46)	.5625-24
13	12	.844 (21.44)	.500 (12.70)	.766 (19.46)	.938 (23.83)	1.094 (27.79)	.859 (21.82)	.6875-24
15	14	.969 (24.61)	.578 (14.68)	.891 (22.63)	1.062 (26.97)	1.156 (29.36)	.938 (23.83)	.8125-20
17	16	1.094 (27.79)	.641 (16.28)	1.016 (25.81)	1.219 (30.96)	1.219 (30.96)	1.000 (25.40)	.9375-20
19	18	1.219 (30.96)	.688 (17.48)	1.141 (28.98)	1.344 (34.14)	1.344 (34.14)	1.047 (26.59)	1.0625-18
21	20	1.344 (34.14)	.734 (18.64)	1.265 (32.13)	1.469 (37.31)	1.469 (37.31)	1.094 (27.79)	1.1875-18
23	22	1.469 (37.31)	.796 (20.22)	1.391 (35.33)	1.594 (40.49)	1.594 (40.49)	1.156 (29.36)	1.3125-18
25	24	1.594 (40.49)	.859 (21.82)	1.516 (38.51)	1.719 (43.66)	1.719 (43.66)	1.219 (30.96)	1.4375-18

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Material: Copper alloy. Finish shall be tin-lead, solder plated. The use of pure tin is prohibited both internally and externally. Tin content of connectors, their components and solder shall not exceed 97 percent, by mass. Tin shall be alloyed with a minimum of 3 percent lead, by mass.
4. Type 1 may be of a two-piece construction. Type 2 may be of a three-piece construction. Individual pieces shall be shipped unassembled.
5. Method of joining components is optional.

FIGURE 1. Adapter – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Interface dimensions shall conform to MIL-DTL-38999.
Mating connectors: MIL-DTL-38999 series I and series II.

Qualification:


Examination of product.
Mating and unmating forces.
Humidity.
Salt spray (corrosion).
Altitude immersion.

Group A sampling inspection. 100% inspection is not applicable. Sampling inspection shall be in accordance with table I:

TABLE I. Group A sampling plan.

Lot size	Sample size
1 to 13	100 percent
14 to 150	13 units
151 to 280	20 units
281 to 500	29 units
501 to 1,200	34 units
1,201 to 3,200	42 units

Part or Identifying Number (PIN) example:

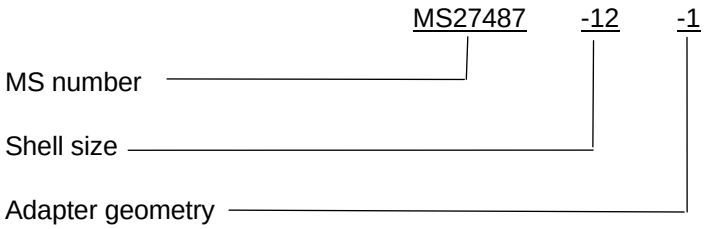

-1: Straight adapter
-2: 90° elbow adapter

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

SAE-AS85049/32

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2012-039)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.