
FED. SUP CLASS
5340

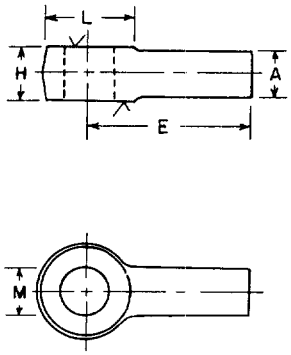

DASH NO.	NOMINAL DIAMETER A	LENGTH E	THICKNESS OF BOSS +.00 -.01 H	DIAMETER OF BOSS ±.03 L	DIAMETER OF HOLE M SIZE (E)	DIAMETER OF HOLE M TOLERANCE +.0010 (E)	WEIGHT (APPROX) LBS	ULTIMATE (MIN) AXIAL LOAD LBS
1	#10 (.190)	1.25	0.19	0.38	.1875	-.0010	0.02	1500
2	1/4	1.25	0.28	0.50	.2500	-.0010	0.03	2700
3	5/16	1.38	0.34	0.59	.3125	-.0010	0.05	4200
4	3/8	1.50	0.44	0.69	.3750	-.0010	0.08	6000
5	7/16	1.50	0.50	0.81	.4375	-.0010	0.12	8200
6	1/2	1.75	0.56	0.94	.5000	-.0020	0.18	10700
7	5/8	2.00	0.69	1.19	.6250	-.0020	0.34	16800
8	3/4	2.38	0.81	1.44	.7500	-.0020	0.59	24300
9	7/8	2.75	0.94	1.69	.8750	-.0020	0.91	33000
10	1	3.00	1.06	1.94	1.0000	-.0020	1.32	43200

MATERIAL: Steel, carbon, SAE 1010, 1111, AISI-C1015 - C1029 or equivalent in accordance with Fed. Std. No. 66. These steels shall have a minimum tensile strength of 55,000 PSI.

PROTECTIVE COATING: Zinc coated (hot dip galvanized) in accordance with ASTM A123. Zinc (electrodeposited) in accordance with QQ-Z-325.

SURFACE ROUGHNESS: Surfaces marked √ shall have √125 surface roughness in accordance with ANSI B46.1.

PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS35813-1.

TOLERANCE: Unless otherwise specified, tolerance shall be ±.03.

DIMENSIONS: All dimensions specified are to be met after plating.

NOTES:
(1) Unless otherwise specified, all dimensions are in inches.
(2) Remove all burrs and sharp edges.
(3) For design feature purposes, this standard takes precedence over procurement documents referenced herein.
(4) Reference documents shall be of the issue in effect on date of invitations for bid.
(5) Illustrations are for identification and are not intended to restrict the design or shapes not dimensioned.

APPROVED 15 JUNE 1961 REVISED (A) 30 JUNE 1966 (B) 8 MAY 1970 (C) 1 JULY 1983 (D) 27 FEB 1987

USER ACTIVITIES:
ARMY - AR, GL, ME, MI
NAVY - MC, OS YD

REVIEW ACTIVITIES:
ARMY - AV, IS, AR
NAVY - SH

DISTRIBUTION STATEMENT A. Approved for public release: distribution is unlimited

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A.	AR
Other Cust	AS 82

TITLE: CONNECTOR, ROD END--STEEL

MILITARY STANDARD
MS35813

PROCUREMENT SPECIFICATION: MIL-C-45918

SUPERSEDES: EECX1

SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5340-1816

AMSC/NA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:28Z
Check the source to verify that this is the current version before use.