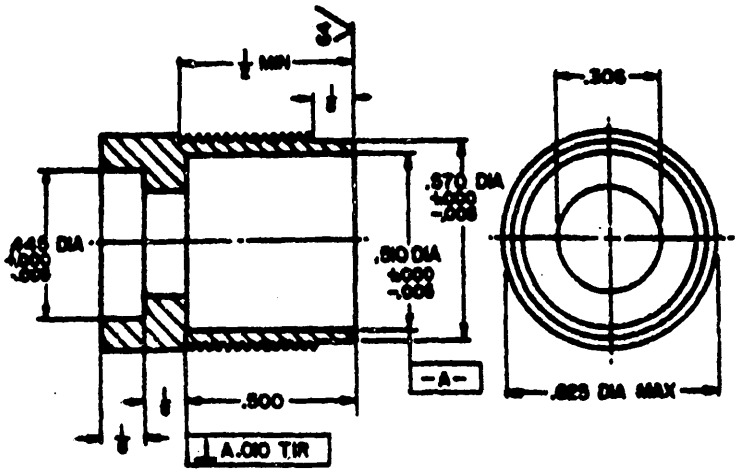


NOTES:

(1) MATERIAL SHALL BE BRASS CONFORMING TO COMPOSITION 11 OR 22, TEMPER 1/2 HARDNESS MINIMUM, IN ACCORDANCE WITH SPECIFICATION QQ-B-626.

(2) SURFACE FINISH ACCORDING TO MILITARY STANDARD MIL-STD-10.

(3) FERRULE SHALL BE FREE OF BURS AND SHARP EDGES.

(4) THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H-28.

(5) DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE: ± .005 ON DECIMALS, ± 1/64 ON FRACTIONS.

(6) REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

(7) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER.

APPROVED 23 APRIL 1968 REVISED

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT OR DESIGN HEREIN IN ENGINEERING, DESIGN & PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

CUSTODIANS	OTHER INT.
ARMY-ORD	4E, 31G, T, Q
NAVY-DOCKS	8- SH, MO
AIR FORCE	AF-
PROCUREMENT SPECIFICATION	SUPERSEDES:

MILITARY STANDARD

FERRULE, ELECTRICAL CONDUIT: SPARK PLUG CABLE ELBOW (OTHER THAN AIRCRAFT)

MS39017

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:44Z
Check the source to verify that this is the current version before use.