
MS9081

FED. SUP CLASS 3110

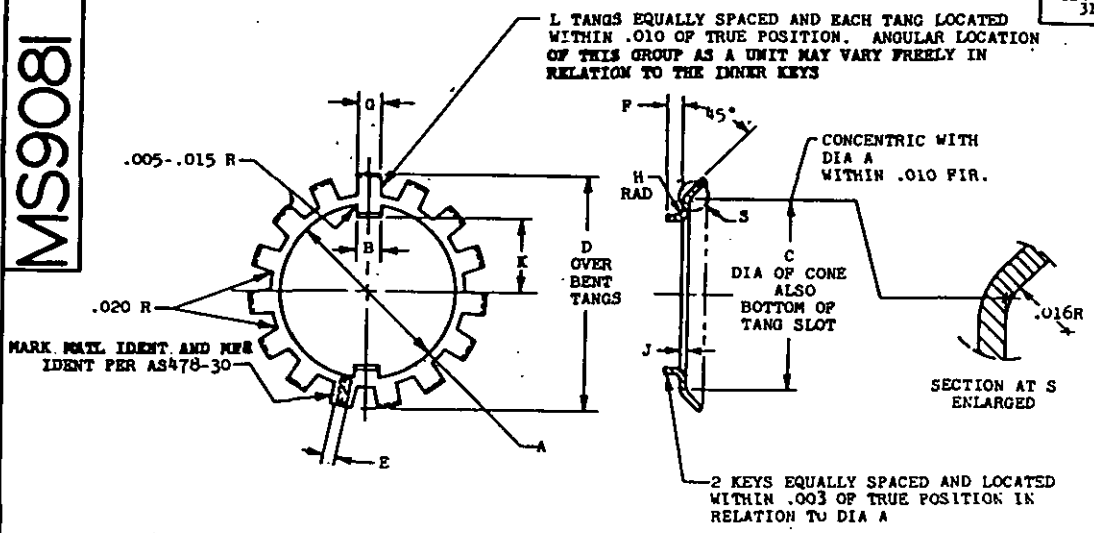

PART NUMBER	•	NOMINAL BEARING BORE DIA	A +.010 -.000	B	C +.020 -.000	D +.000 -.030	E ±.030	F +.000 -.020	G	H ±.005	J	K +.000 -.005	L	APPROX WEIGHT LB
MS9031-10		.3937	.427	.105-.115	.531	.828	.060	.094	.094-.094	.016	.029-.035	.130	9	.002
MS9031-11		.4724	.507	.105-.115	.625	.922	.060	.094	.094-.094	.020	.029-.035	.168	9	.002
MS9031-12		.5906	.616	.105-.115	.750	1.094	.060	.094	.094-.094	.030	.029-.035	.214	11	.003
MS9031-13		.6693	.694	.105-.115	.875	1.203	.060	.094	.094-.094	.030	.029-.035	.253	11	.005
MS9031-14		.7874	.820	.156-.176	1.000	1.375	.080	.094	.146-.156	.030	.036-.044	.304	11	.008
MS9031-15		.9843	1.010	.156-.176	1.188	1.562	.080	.125	.146-.156	.040	.036-.044	.390	13	.010
MS9031-16		1.1811	1.207	.156-.176	1.433	1.759	.080	.125	.146-.156	.040	.036-.044	.490	13	.011
MS9031-17		1.3730	1.420	.156-.176	1.656	2.078	.120	.125	.146-.156	.040	.046-.054	.588	15	.017
MS9031-18		1.5745	1.620	.230-.300	1.844	2.250	.120	.125	.204-.220	.040	.046-.054	.680	15	.021
MS9031-19		1.7717	1.835	.230-.300	2.062	2.500	.120	.156	.204-.220	.040	.046-.054	.787	17	.025
MS9031-20		1.9685	2.020	.230-.300	2.250	2.688	.120	.156	.204-.220	.040	.046-.054	.880	17	.026
MS9031-21		2.1654	2.230	.230-.300	2.500	2.953	.120	.156	.204-.220	.050	.053-.063	.965	17	.036
MS9031-22		2.3622	2.420	.230-.300	2.688	3.188	.120	.156	.204-.220	.050	.053-.063	1.060	17	.03
MS9031-23		2.5591	2.605	.230-.300	2.875	3.375	.120	.156	.204-.220	.050	.053-.063	1.152	19	.041
MS9081-24		2.7559	2.800	.230-.300	3.094	3.594	.120	.250	.204-.220	.060	.053-.068	1.242	19	.045
MS9031-25		2.9528	2.990	.230-.300	3.375	3.922	.120	.250	.297-.312	.070	.053-.068	1.328	19	.046
MS9081-26		3.1496	3.200	.340-.360	3.594	4.141	.120	.250	.297-.312	.070	.053-.063	1.428	19	.051
MS9031-27		3.3465	3.410	.340-.360	3.812	4.359	.120	.250	.297-.312	.070	.053-.063	1.525	19	.096
MS9031-28		3.5433	3.630	.340-.360	4.000	4.547	.120	.250	.297-.312	.080	.053-.063	1.610	19	.096
MS9081-29		3.7402	3.800	.340-.360	4.219	4.812	.120	.250	.297-.312	.080	.053-.063	1.720	19	.106
MS9081-30		3.9370	3.990	.340-.360	4.406	5.000	.120	.312	.297-.312	.080	.053-.063	1.815	19	.109
MS9081-31		4.1339	4.190	.340-.360	4.594	5.188	.120	.312	.360-.375	.080	.053-.063	1.915	19	.113
MS9081-32		4.3307	4.400	.340-.360	4.812	5.406	.120	.312	.360-.375	.080	.053-.063	2.020	19	.125

MATERIAL: STEEL AMS6350

FINISH: PHOSPHATE TREATMENT AMS2481
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.
DO NOT USE UNASSIGNED PART NUMBERS.
TRUE POSITION TOLERANCE SPECIFIED IS FOR MAXIMUM MATERIAL CONDITION.

(B) **INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972.**
NO SUPERSEDING STANDARD.

AS, & AMS ARE SAE PUBLICATIONS...
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 11 Jun 58 REVISED (A) 7 Sep 62 (B) 26 Oct 72

CUSTODIANS
P.A. Navy - AS
USAF - TF

PROCUREMENT SPECIFICATION
NONE

MILITARY STANDARD

WASHER, KEY - DOUBLE, BEARING RETAINING, [illegible]

MS9081

SHEET 1 OF 1

DD FORM 1 NOV 68 1233 E-25-58

☆U.S. GOVERNMENT PRINTING OFFICE:1972-714-540/3048

DOD NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:10Z
Check the source to verify that this is the current version before use.