
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MS9226(ASG)

FED. SUP CLASS 9525

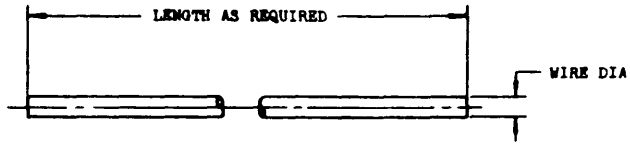

PART NUMBER	(A)	WIRE DIAMETER	FT PER LB APPROX
MS9226-01		.016 ± .001	1422
MS9226-02		.020 ± .001	873
* MS9226-03		.025 ± .001	558
* MS9226-04		.032 ± .002	341
* MS9226-05		.040 ± .002	218
MS9226-06		.051 ± .002	134
MS9226-07		.063 ± .002	88
MS9226-08		.091 ± .002	42

* PREFERRED SIZE

(A) MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5687
HEAT IN AIR AT 1000°F FOR A TIME SUFFICIENT TO PRODUCE A GRAY COLOR
SPECIFICATION REQUIREMENTS SHALL BE MAINTAINED AFTER HEAT
WHEN LOCKWIRE IS SUPPLIED IN ACCORDANCE WITH THIS DRAWING, THE SPECIFIED DIAMETER TOLERANCES SUPERSEDE THOSE IN THE MATERIAL SPECIFICATION.
(A) DIMENSIONS IN INCHES.
DO NOT USE UNASSIGNED PART NUMBERS.

APPROVED 21 Jan 58 REVISED (f) 13 Aug 61

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

CUSTODIANS Navy - Bep; P.A. USAF - AFSC	MILITARY STANDARD	MS9226(ASG)
PROCUREMENT SPECIFICATION NONE	WIRE - STEEL, CORROSION AND HEAT RESISTANT, SAFETY, 1800°F	SHEET 1 OF 1

DD FORM 1 NOV 60 223

ac-PB 3-8-61

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/7023

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:13Z
Check the source to verify that this is the current version before use.