
MS9564

FED SUP CLASS 5305

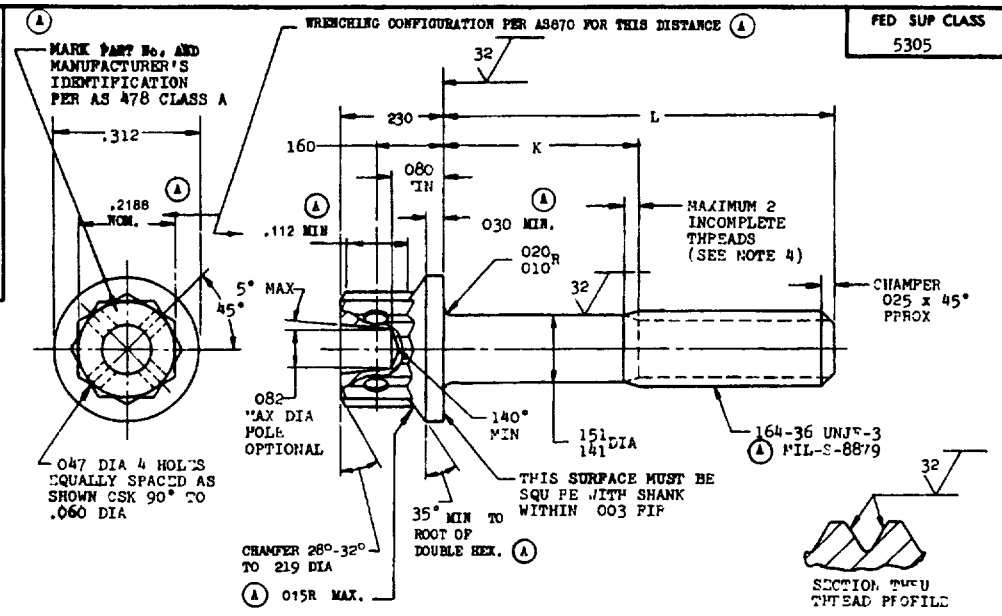

PART NO	L	Y	APPROX WEIGHT LB/100	PART NO	L	Y	APPROX WEIGHT LB/100
MS9564 - 02	.250	.062 - .082	.420	MS9564-16	1.125	487- 547	.847
MS9564-03	.312	062- 082	451	MS9564-17	1.188	550- 610	878
MS9564-04	.375	062- 082	482	MS9564-18	1.250	612- 672	908
MS9564-05	.438	062- 082	513	MS9564-19	1.312	674- 734	938
MS9564-06	.500	062- 082	543	MS9564-20	1.375	737- 797	969
MS9564-07	.562	062- 082	573	MS9564-21	1.438	800- 860	999
MS9564-08	.625	062- 082	604	MS9564-22	1.500	862- 922	1.029
MS9564-09	.688	062-.110	634	MS9564-23	1.562	924- 984	1.060
MS9564-10	.750	112-.172	664	MS9564-24	1.625	987-1.047	1.090
MS9564-11	.812	174- 234	695	MS9564-25	1.688	1.050-1.110	1.121
MS9564-12	.875	237- 297	725	MS9564-26	1.750	1.112-1.172	1.151
MS9564-13	.938	300- 360	756	MS9564-27	1.875	1.237-1.297	1.212
MS9564-14	1.000	362- 422	786	MS9564-28	2.000	1.362-1.422	1.273
MS9564-15	1.062	424- 484	816	MS9564-29	1.812	1.174-1.234	1.181
				MS9564-30	1.938	1.300-1.360	1.243

1. SHANK SHALL BE STRAIGHT WITHIN .003 TOTAL PER INCH OF SCREW LENGTH
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 T
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .005 FIR
4. INCOMPLETE THREADS NOT TO ENTER FILLET
5. MATERIAL CORROSION AND HEAT RESISTANT STEEL AMS 5731
6. MANUFACTURING SPECIFICATION AMS 7477
7. FLUORESCENT PENETRANT INSPECTION PER AMS 2645
8. SURFACE TEXTURE: USAS B46.1-1962 UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD
9. BREAK SHARP EDGES .003- .015 UNLESS OTHERWISE SPECIFIED
10. DIMENSION IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°
11. DO NOT USE UNASSIGNED PART NUMBERS

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION

APPROVED 16 Dec 65 REVISED 17 Nov 69

P.A USAF - 11
Other Cust Army - AV Navy - AS

TITLE: SCREW, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, PD SHANK, AMS5731, .164-36 UNJF-3A

MILITARY STANDARD

MS9564

PROCUREMENT SPECIFICATION MIL-S-

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U S GOVERNMENT PRINTING OFFICE: 1970-393-093/5-3775

User activities:

Review activities
USAF - 82, 85
Army - MC

This military standard is approved by the Department of Defense and is mandatory for all activities. Suggestions for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:20Z
Check the source to verify that this is the current version before use.