
MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, MARINE CORPS PISTOL CHAMPIONSHIP (WALSH TROPHY)

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.

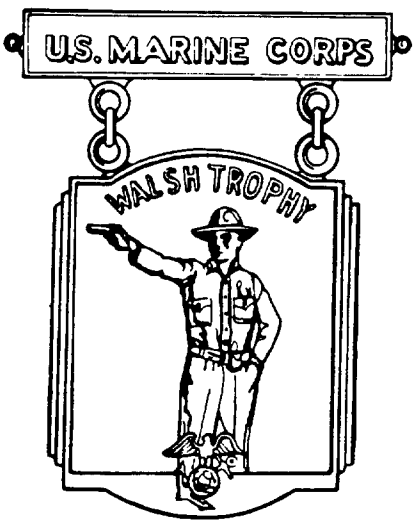

MATERIAL: 1/10 10 KARAT GOLD FILLED (1/20 OBVERSE, 1/20 REVERSE OVER COMM'L BRASS ALLOY)

DIMENSIONS (INCHES):

HEIGHT:
- ASSEMBLED: 2 (REF)
- PENDANT (EXCLUDING LUGS): 1-15/32 (REF)
- SUSPENSION BAR (EXCLUDING LUGS): 9/32 (REF)

WIDTH (OVERALL):
- PENDANT: 1-15/64 (REF)
- SUSPENSION BAR (INCLUDING BALLS): 1-17/32 (REF)

THICKNESS:
- PENDANT (THICKEST POINT): .115 (REF)
- SUSPENSION BAR (AT RIM): .070 (REF)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:02Z
Check the source to verify that this is the current version before use.

FINISH:
PENDANT:
OBVERSE: GOLD PLATED, LIGHTLY SMUDGED, RELIEVED, LETTERS AND RIM (TOP AND SIDES ONLY), POLISHED

REVERSE: MIRROR-LIKE POLISHED

SUSPENSION BAR:
OBVERSE: GOLD PLATED, LIGHTLY SMUDGED, HIGHLIGHTS POLISHED
REVERSE AND EDGES: MIRROR-LIKE POLISHED

NOTES:

1. THE LINKS SHALL BE OBLONG SHAPED, 7/32 ± 1/32 INCH LONG BY 5/32 ± 1/32 INCH WIDE, SHALL BE FORMED FROM .040 ± .002 INCH DIAMETER WIRE. LUGS ARE AN INTEGRAL PART OF BOTH PENDANT AND SUSPENSION BAR.

2. THE ATTACHING DEVICE SHALL BE A PRONG AND FLAT BALL TYPE CLUTCH AND SHALL BE CENTERED ON AND SOLDERED TO THE BACK OF THE SUSPENSION BAR. THE PRONGS SHALL BE 1-1/32 ± 1/32 INCH ON CENTERS EQUIDISTANT FROM EACH END.

Custodian:
Army - IH
Navy - NU

Review activities:
Navy - MC
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0268)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:02Z
Check the source to verify that this is the current version before use.