INCH-POUND


MIL-DTL-3628/40F
15 August 2009
SUPERSEDING
MIL-DTL-3628/40E
15 November 1996

DETAIL SPECIFICATION SHEET

# BADGE, QUALIFICATION, MARINE CORPS RIFLE COMPETITION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

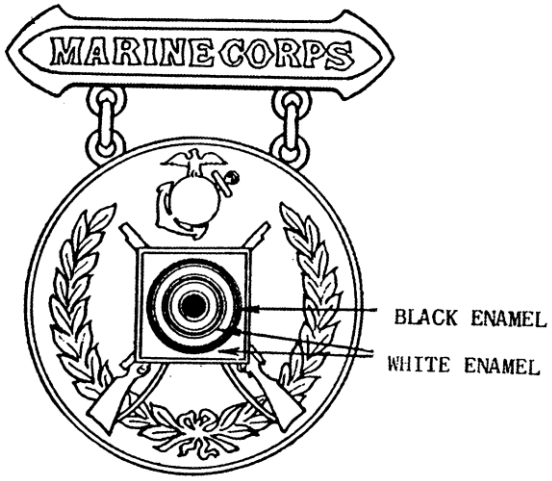


DASH NO.
-1: Gold
-2: Silver
-3: Bronze

MATERIALS:

PENDANT: Gilding Metal

SUSPENSION BAR
-1, -2: Red Brass
-3: Gilding Metal



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:02Z
Check the source to verify that this is the current version before use.

FINISH:
PENDANT:
-1: Hard Enameled, Gold Plated, Matte Finish, Lightly Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
REVERSE - Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
-2: Hard Enameled, Silver Plated, Oxidized, Relieved, Lightly Polished Highlights and shall match TIOH Metal Finish Chip Number 15.
REVERSE - Silver Plated, Mirror-like Polished.
-3: Hard Enameled, Oxidized, Highlights Polished.
REVERSE - Mirror-like Polished.

SUSPENSION BAR:
-1: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
REVERSE - Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
-2: Silver Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 13.
REVERSE - Silver Plated, Mirror-like Polished.
-3: Oxidized, Highlights Polished.
REVERSE - Silver Plated, Mirror-like Polished.

DIMENSIONS:
PENDANT:
DIAMETER: 1-9/32 inches (REF)
THICKNESS (at rim): 0.085 inch $\pm$ 0.005 inch
SUSPENSION BAR:
HEIGHT (overall): 3/8 inch (REF)
WIDTH (overall): 1-15/32 inches (REF)
THICKNESS (edge): 0.065 inch $\pm$ 0.005 inch
ASSEMBLED HEIGHT (overall): 1-7/8 inches

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

| COLOR | CHIP NUMBER |
|---|---|
| Black | 26 |
| White | 28 |

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be smooth and flush with the dikes.

4. The connecting links shall be fabricated from wire with a nominal diameter of 0.044 inch, shall be oblong shaped and 3/16 inch $\pm$ 1/64 inch long by 1/8 inch $\pm$ 1/64 inch wide.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:02Z
Check the source to verify that this is the current version before use.

The links shall be manufactured with the same material and finish as the pendant and suspension bar.

5. Lugs are integral.

6. The attaching device shall be a prong and flat ball clutch type. Red brass flat ball clutches shall be used for Dash No. -1 and -3. Nickel plated flat ball clutches shall be used for Dash No. -2. The prongs shall be located on the horizontal center line of the suspension bar, equidistant from each end and 1-1/16 inches ± 1/32 inch apart.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Navy – MC

Preparing activity:
Army - IH
(Project No. 8455-2009-106)

Review activities:
DLA - CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:02Z
Check the source to verify that this is the current version before use.