NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/40K
17 February 2026
SUPERSEDING
MIL-DTL-3628/40J
17 May 2024

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, MARINE CORPS RIFLE COMPETITION

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

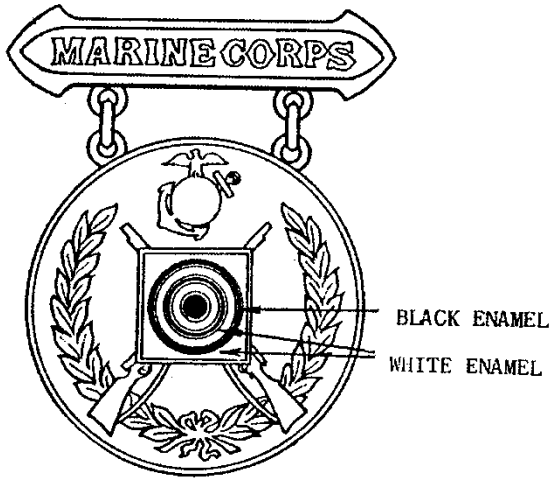

DASH NO.
-1: Gold
-2: Silver
-3: Bronze

MATERIALS:
PENDANT AND SUSPENSION BAR:
-1, -2: Red Brass 85/15 (UNS Alloy No. C-230)
-3: Gilding Metal 95/5 (UNS Alloy No. C-210)

FINISH:
PENDANT:
-1: OBVERSE: Epoxy resin, 24K Gold Plated, Matte Finish, Lightly Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:02Z
Check the source to verify that this is the current version before use.

REVERSE 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

-2: OBVERSE: Epoxy resin, Silver Plated, Oxidized, Relieved, Lightly Polished Highlights and shall match TIOH Metal Finish Chip Number 15.
REVERSE - Silver Plated, Mirror-like Polished.

-3: OBVERSE: Oxidized, Highlights Polished.
REVERSE - Mirror-like Polished.

SUSPENSION BAR:

-1: OBVERSE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
REVERSE - Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

-2: OBVERSE: Silver Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 13.
REVERSE - Silver Plated, Mirror-like Polished.

-3: OBVERSE: Oxidized, Highlights Polished.
REVERSE - Silver Plated, Mirror-like Polished.

DIMENSIONS:

PENDANT:
DIAMETER: 1-9/32 inches (REF)
THICKNESS (At rim): 0.085 inch ± 0.005 inch

SUSPENSION BAR:
HEIGHT (Overall): 3/8 inch (REF)
WIDTH (Overall): 1-15/32 inches (REF)
THICKNESS (Edge): 0.065 inch ± 0.005 inch

ASSEMBLED HEIGHT (Overall): 1-7/8 inches

ATTACHING DEVICE:

1: The attaching device shall be a prong and wing clutch type.

2: Red brass flat ball clutches shall be used for -1 and -3. Nickel plated flat ball clutches shall be used for -2. The prongs shall be located on the horizontal center line of the suspension bar equidistant from each end and 1-1/16 inches ± 1/32 inch apart.

3: The connecting links shall be fabricated from wire with a nominal diameter of 0.044 inch, shall be oblong shaped and 3/16 inch ± 1/64 inch long by 1/8 inch ± 1/64 inch wide. The links shall be manufactured with the same material and finish as the pendant and suspension bar.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:02Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin shall be applied to the Target in center of the Badge as indicated above and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIP	
COLOR	**CHIP NUMBER**
Black	#26
White	#28

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Lugs are integral.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH
Navy - MC

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-067)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:02Z
Check the source to verify that this is the current version before use.