NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/41E
15 November 1996
SUPERSEDING
MIL-B-3628/41D
30 July 1993

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, MARINE CORPS, PISTOL COMPETITION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

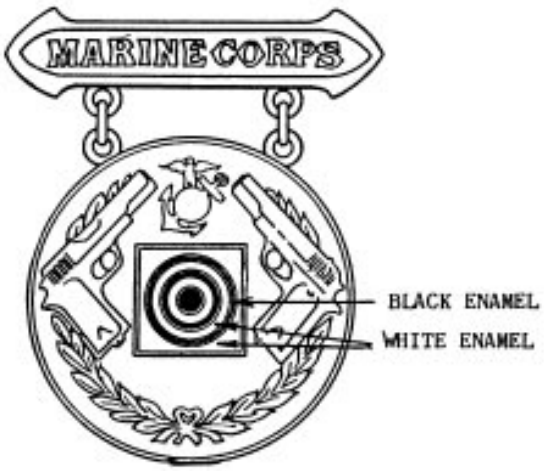

MATERIALS:
PENDANT: Gilding Metal
SUSPENSION BAR:
-1, -2: Red Brass or Gilding Metal
-3: Gilding Metal

DASH NO.
-1: Gold
-2: Silver
-3: Bronze

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:03Z
Check the source to verify that this is the current version before use.

FINISH:
PENDANT:
-1: Hard Enameled, Gold Plated, Matte Finish, Lightly Polished Highlights and shall match TIOH Metal Finish Chip Number 8. REVERSE - Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
-2: Hard Enameled, Silver Plated, Oxidized, Relieved, Lightly Polished Highlights and shall match TIOH Metal Finish Chip Number 15. REVERSE - Silver Plated, Mirror-like Polished.
-3: Hard Enameled, Oxidized, Relieved, Highlights Polished. REVERSE - Mirror-like Polished.

SUSPENSION BAR:
-1: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8. REVERSE - Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
-2: Silver Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 13. REVERSE - Silver Plated, Mirror-like Polished.
-3: Oxidized, Relieved, Highlights Polished. REVERSE - Mirror-like Polished

DIMENSIONS:
PENDANT:
DIAMETER: 1-9/32 inches (3.25 cm) (REF)
THICKNESS (At Rim): 0.085 inch ± 0.005 inch (0.2159 cm ± 0.012 cm)
SUSPENSION BAR:
HEIGHT (Overall): 3/8 inch (0.95 cm) (REF)
WIDTH (Overall): 1-15/32 inches (3.75 cm) (REF)
THICKNESS (Edge): 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm)
ASSEMBLED HEIGHT (Overall): 1-7/8 inches (4.76 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Black	26
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be smooth and flush with the dikes.

4. The connecting links, fabricated from wire with a nominal diameter of 0.044 inch (0.112 cm), shall be oblong shaped, 3/16 inch ± 1/64 inch (0.48 cm ± 0.04 cm) long by 1/8 inch ± 1/64 inch (0.32 cm ± 0.04 cm) wide. The links shall be manufactured with the same material and finish as the pendant and suspension bar.

5. The lugs are integral.

6. The attaching device shall be a prong and flat ball clutch type. Red brass flat ball clutches shall be used for Dash No. -1 and -3, Nickel plated flat ball clutches shall be used for Dash No. 2. The prongs shall be located on the horizontal center line on the back of the suspension bar

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:03Z
Check the source to verify that this is the current version before use.

equidistant from each end and 1-1/16 inches ± 1/32 inch (2.70 cm ± 0.08 cm) apart.

Custodian:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC
DLA - CT

(Project No. 8455-0864)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:03Z
Check the source to verify that this is the current version before use.