NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/42H
14 December 2021
SUPERSEDING
MIL-DTL-3628/42G
06 February 2017

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, MARINE CORPS, DIVISION RIFLE COMPETITION

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

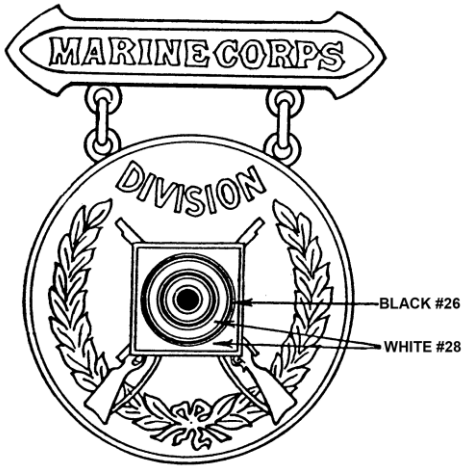

DASH NO.
-1. Gold
-2. Silver
-3. Bronze

MATERIALS:
PENDANT: (-1. -2 and -3) Gilding Metal 95/5 (UNS Alloy No. C-210)

SUSPENSION BAR:
-1, -2: Red Brass 85/15 (UNS Alloy No. C-230) or Gilding Metal 95/5 (UNS Alloy No. C-210)
-3: Gilding Metal 95/5 (UNS Alloy No.C-210)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:03Z
Check the source to verify that this is the current version before use.

FINISH:
PENDANT:
-1: OBVERSE: Epoxy resin, 24K Gold Plated, Matte Finish, Lightly Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
REVERSE – 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
-2: OBVERSE: Epoxy resin, Silver Plated, Oxidized, Buffed Relieved, Matte Finish Polished Highlights and shall match TIOH Metal Finish Chip Number 15.
REVERSE - Silver Plated, Mirror-like Polished.
-3: OBVESRE: Epoxy resin, Oxidized, Buffed Relieved, Polished Highlights and shall match TIOH Metal Finish Chip Number 24
REVERSE - Mirror-like Polished.

SUSPENSION BAR:
-1: OBVERSE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
REVERSE – 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
-2: OBVERSE: Silver Plated, Oxidized, Buffed Relieved, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 15.
REVERSE - Silver Plated, Mirror-like Polished.
-3: OBVERSE: Oxidized, Buffed Relieved, Polished Highlights and shall match TIOH Metal Finish Chip Number 24.
REVERSE - Mirror-like Polished

DIMENSIONS:
PENDANT:
DIAMETER: 1-9/32 inches (REF)
THICKNESS (At rim): 0.085 inch $\pm$ 0.005 inch
SUSPENSION BAR:
HEIGHT (Overall): 3/8 inch (REF)
WIDTH (Overall): 1-15/32 inches (REF)
THICKNESS (Edge): 0.065 inch $\pm$ 0.005 inch
ASSEMBLED HEIGHT (Overall): 1-3/4 inches

ATTACHING DEVICE:
1. The attaching device shall be a prong and flat ball clutch type.

2. Red brass flat ball clutches shall be used for -1 and -3, Nickel plated flat ball clutches shall be used for -2. The prongs shall be located on the horizontal center line on the back of the suspension bar equidistant from each end and 1-1/16 inches $\pm$ 1/32 inch apart.

CONNECTING LINKS AND LUGS:
1. The connecting links, fabricated from wire with a nominal diameter of 0.044 inch, shall be oblong shaped, 3/16 inch $\pm$ 1/64 inch long by 1/8 inch $\pm$ 1/64 inch wide. The links shall be manufactured with the same material and finish as the pendant and suspension bar.

2. The lugs are integral.

EPOXY: Epoxy resin (stoning epoxy) may be at the option of the manufacturer. When hard enamel is used, the material requirement shall be gilding metal 95/5 (UNS Alloy NO. C-

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:03Z
Check the source to verify that this is the current version before use.

210). When epoxy is used, the material requirement shall be either red brass or gilding material. Colors shall conform to TIOH Hard Enamel Color Chip Numbers listed below:

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Black	#26
White	#28

NOTE:
The term (REF) refers to the measurements taken from the Government furnished hub or die.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Navy - MC

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2022-033)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:03Z
Check the source to verify that this is the current version before use.