
MILITARY SPECIFICATION SHEET

# BADGE, QUALIFICATION, MARINE CORPS, DIVISION PISTOL COMPETITION

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.

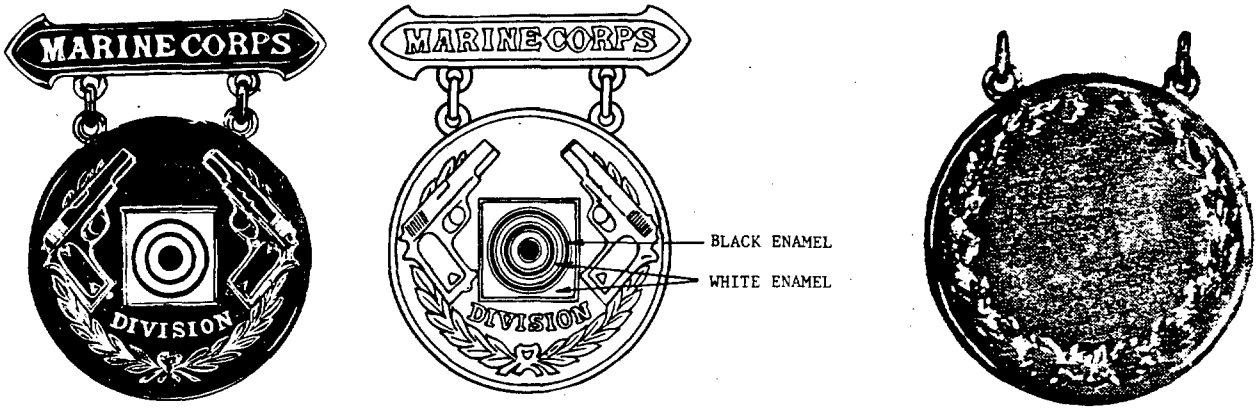


DASH NOS:
-1: GOLD
-2: SILVER
-3: BRONZE

MATERIAL:
-1: 1/10 10 KARAT GOLD FILLED (1/20 OBVERSE, 1/20 REVERSE OVER COMM'L BRASS ALLOY)
-2: 1/10 SILVER FILLED (1/20 OBVERSE, 1/20 REVERSE OVER COMM'L BRASS ALLOY)
-3: GILDING METAL

DIMENSIONS (INCHES):

| HEIGHT: | WIDTH (OVERALL): | THICKNESS (AT RIM): |
|---|---|---|
| ASSEMBLED: 1-3/4 (REF) | PENDANT: 1-9/32 (REF) | PENDANT: .085 ± .005 |
| PENDANT: 1-9/32 (REF) | SUSPENSION BAR: 1-15/32 (REF) | SUSPENSION BAR: .065 ± .005 |
| SUSPENSION BAR: 3/8 (REF) | | |

FINISH:
OBVERSE:
PENDANT:
-1: ENAMELED, GOLD PLATED, SMUDGED, HIGHLIGHTS LIGHTLY POLISHED
-2: ENAMELED, SILVER PLATED, OXIDIZED, RELIEVED, HIGHLIGHTS LIGHTLY POLISHED
-3: ENAMELED, OXIDIZED, RELIEVED, HIGHLIGHTS LIGHTLY POLISHED
SUSPENSION BAR:
-1: GOLD PLATED, SATIN FINISH, HIGHLIGHTS POLISHED
-2: SILVER PLATED, SATIN FINISH, HIGHLIGHTS POLISHED
-3: OXIDIZED, HIGHLIGHTS POLISHED

REVERSE: BRIGHTLY POLISHED


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:04Z
Check the source to verify that this is the current version before use.

NOTES:

1. THE LUGS ON THE PENDANT FORMED FROM .044 ± .002 INCH DIAMETER WIRE, SHALL BE 5/32 ± 1/64 INCH IN OUTSIDE DIAMETER. THE LUGS SHALL BE LOCATED 3/32 ± 1/64 INCH BELOW THE TOP EDGE OF THE PENDANT AND 11/16 ± 1/64 INCH ON CENTERS. THE LUGS SHALL BE SOLDERED IN PLACE WITH GOLD SOLDER FOR DASH NO. 1 AND DASH NO. 3 AND SILVER SOLDER FOR DASH NO. 2. AT OPTION OF THE MANUFACTURER, THE LUGS ON THE PENDANT MAY BE MADE AN INTEGRAL TYPE, PROVIDED THE FINISHED DIMENSIONS ARE THE SAME AS THOSE SPECIFIED FOR THE SOLDERED TYPE.

2. THE CONNECTING LINKS, FORMED FROM .040 ± .002 INCH DIAMETER WIRE, SHALL BE OBLONG SHAPED, 3/16 ± 1/64 INCH LONG BY 1/8 ± 1/64 INCH WIDE.

3. THE ATTACHING DEVICE SHALL BE THE PRONG AND FLAT BALL TYPE CLUTCH CONFORMING TO FIGURE 2. WHITE METAL FLAT BALL CLUTCHES SHALL BE USED FOR DASH NO. 2 AND RED BRASS FLAT BALL CLUTCHES SHALL BE USED FOR DASH NOS. 1 AND 3. THE DEVICE SHALL BE CENTERED ON AND SOLDERED TO THE BACK OF THE SUSPENSION BAR. THE PRONGS SHALL BE LOCATED 1 ± 1/32 INCH ON CENTERS EQUIDISTANT FROM EACH END.

4. ENAMELED AREAS SHALL BE AS INDICATED. THE ENAMEL SHALL MATCH THE ENAMEL ON THE STANDARD OR APPROVED SAMPLE AND SHALL CONFORM TO THE TIOH COLOR CHIP NUMBERS LISTED BELOW:

| COLOR | CHIP NO. |
|---|---|
| WHITE | 28 |
| BLACK | 26 |

Custodian:
Army - IH
Navy - NU

Review activities:
Navy - MC
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0268)



☆U.S. GOVERNMENT PRINTING OFFICE: 1988 - 505-033/92177

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:04Z
Check the source to verify that this is the current version before use.