INCH-POUND


MIL-DTL-3628/43F
10 November 2009
SUPERSEDING
MIL-DTL-3628/43E
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, MARINE CORPS, DIVISION PISTOL COMPETITION

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

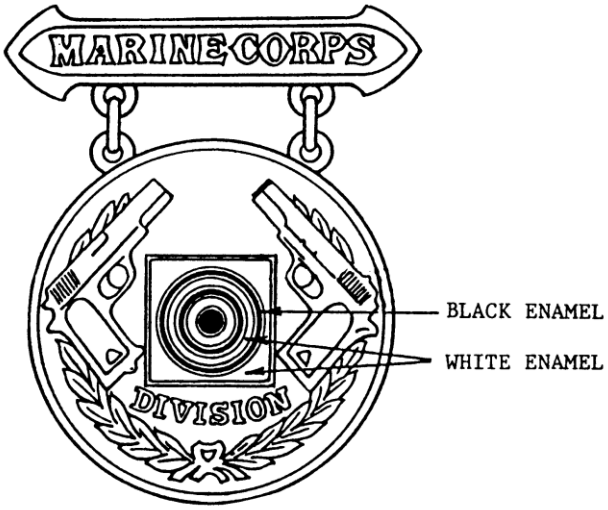

MATERIALS:
PENDANT: Gilding Metal
SUSPENSION BAR:
-1, -2: Red Brass or Gilding Metal
-3: Gilding Metal

DASH NO.
-1: Gold
-2: Silver
-3: Bronze

FINISH:
PENDANT:
-1: Hard Enameled, Gold Plated, Matte Finish, Lightly Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
REVERSE - Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:04Z
Check the source to verify that this is the current version before use.

-2: Hard Enameled, Silver Plated, Oxidized, Relieved, Lightly Polished Highlights and shall match TIOH Metal Finish Chip Number 15.
REVERSE - Silver Plated, Mirror-like Polished.
-3: Hard Enameled, Oxidized, Highlights Polished.
REVERSE - Mirror-like Polished.

SUSPENSION BAR:
-1: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
REVERSE – Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
-2: Silver Plated, Oxidized, Buffed Relieved, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 15.
REVERSE - Silver Plated, Mirror-like Polished.
-3: Oxidized, Highlights Polished.
REVERSE - Mirror-like Polished.

DIMENSIONS:
PENDANT:
DIAMETER: 1-9/32 inches (REF)
THICKNESS (at rim): 0.085 inch ± 0.005 inch
SUSPENSION BAR:
HEIGHT (overall): 3/8 inch (REF)
WIDTH (overall): 1-15/32 inches (REF)
THICKNESS (Edge): 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm)
ASSEMBLED HEIGHT (overall): 1-3/4 inches

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Black	26
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be smooth and flush with the dikes.

4. The connecting links shall be fabricated from wire with a nominal diameter of 0.044 inch shall be oblong shaped and 3/16 inch ± 1/64 inch long by 1/8 inch ± 1/64 inch wide. The links shall be manufactured with the same material and finish as the pendant and suspension bar.

5. Lugs are integral.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:04Z
Check the source to verify that this is the current version before use.

6. The attaching device shall be a prong and flat ball clutch type. Red brass flat ball clutches shall be used for Dash No. -1 and -3. Nickel plated flat ball clutches shall be used for Dash No. -2. The prongs shall be located on the horizontal center line of the suspension bar, equidistant from each end and 1-1/16 inches ± 1/32 inch apart.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH
Navy – NU

Preparing activity:
Army - IH
(Project No. 8455-2010-011)

Review activities:
Navy - MC
DLA - CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:04Z
Check the source to verify that this is the current version before use.