

MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-1278/U


This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

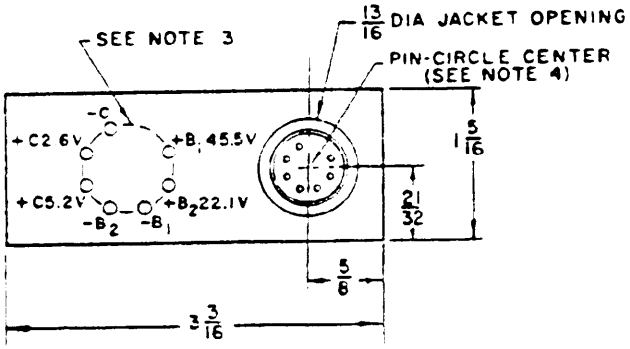

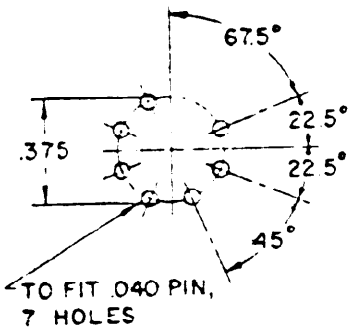

SOCKET DETAIL

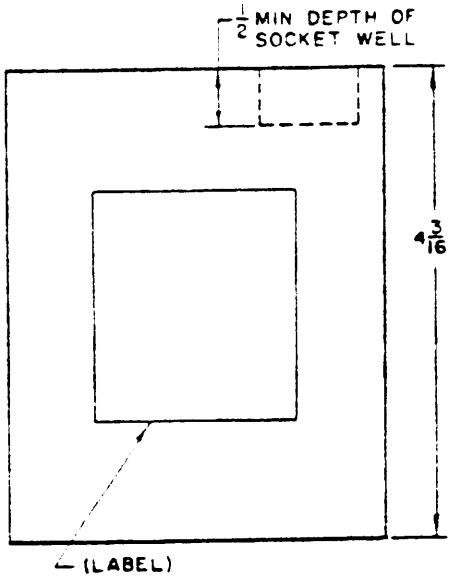

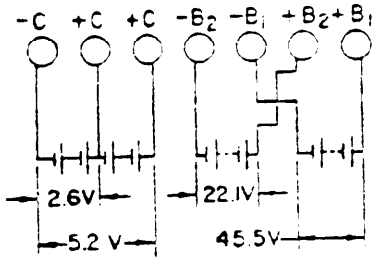

TYPICAL SCHEMATIC

INCHES	MM	INCHES	MM
.005	.13	21/32	16.67
.040	1.02	13/16	20.64
1/16	1.59	1 5/16	33.34
.375	9.53	3 3/16	80.96
1/2	12.70	4 3/16	106.36
5/8	15.88		

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerances are ±1/16 on fractions, ±0.005 on decimals, and ±1/2° on angles.

(D) denotes changes

FSC-6135

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:52Z
Check the source to verify that this is the current version before use.

NOTES: (Contd)

2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.

3. Printed socket facsimile including terminal markings may be shown on top face of jacket opposite jacket opening, instead of directly around the socket.

4. Socket shall be type TS102P03 without shield mounting in accordance with MIL-S-12883.

5. The cells shall be made with a poly-vinyl-chloride barrier material, or equal, and shall be sealed with a polyethylene grommet or equivalent.

REQUIREMENTS:

Dimensions and configuration: See figure.

	B_1 unit	B_2 unit	C unit	C tap unit
Nominal voltage:	45.5 volts	22.1 volts	5.2volts	2.6 volts
Usual number and type of cells:	35"R-640R"	17"R"-640R'	4"R-640R"	-----
Usual cell connection:	Series	Series	Series	-----

Terminals: 7-hole socket.

Weight (Maximum): 1 pound, 6 ounces.

(D) Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

(D) First Article inspection:

Visual and mechanical (External).
Battery voltage.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Insulation resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Capacity, D (without storage).
Jacket integrity test.

(D) Quality conformance inspection:

Visual and mechanical (External).
Battery voltage.
Insulation-resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Jacket integrity test.
Electrode leakage.
Capacity, D & T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:52Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -

Test	Period
D	12 months
T	90 days

Discharge - All units shall be discharged in series through 4,900 ohms continuously to a test-end voltage of 50.4 volts.

Closed circuit voltage - Use TS-183( )/U test per special marking or, with minimum permissible voltage specified for TS-183( )/U, use the load resistance values noted below;

B_1 unit	845.4 ohms
B_2 unit	544.0 ohms
C unit	298.2 ohms

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ( )/U:

UNIT	USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
B_1	14	35.0
B_2	13	17.0
C	12	4.0

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army - ER
Navy - SH
Air Force - 99

Preparing activity:
Army - ER

Review activities:

Project Number: (6135-0155-72)

User activities:
Army - ME
Navy - YD, MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:52Z
Check the source to verify that this is the current version before use.