

MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA- 291/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

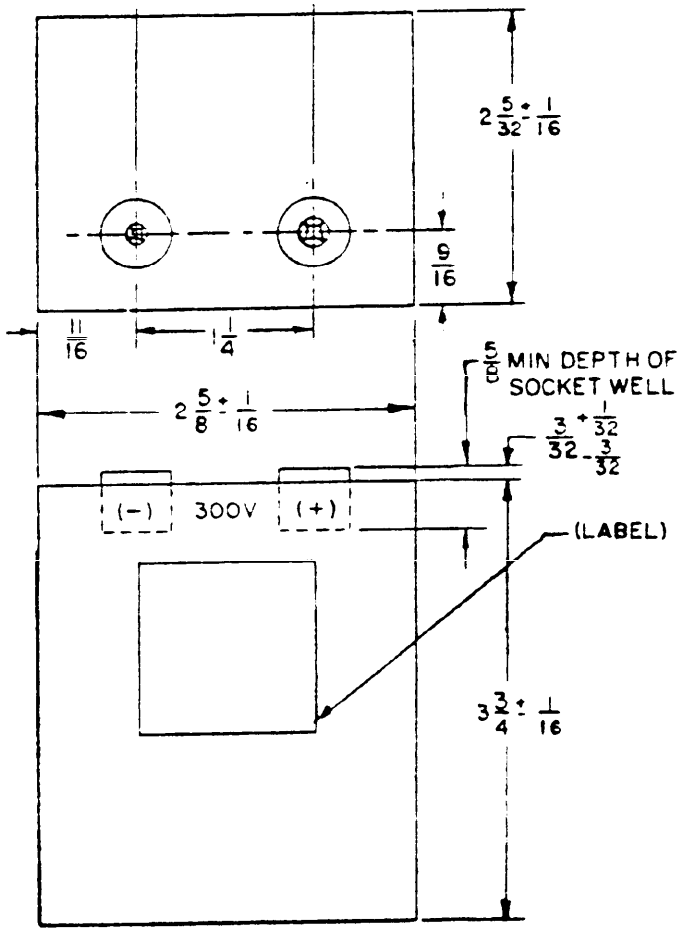



TOP VIEW OF SOCKET

INCHES	MM
1/32	.79
1/16	1.59
3/32	2.38
1/8	3.18
5/32	3.97
9/16	14.29
1/2	12.70
5/8	15.88
11/16	17.46
1 1/4	31.75
2 5/32	54.77
2 5/8	66.68
3 3/4	95.25

© denotes changes

FSC-6135

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:53Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, the tolerance is ± 1/32 inch.

2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.

REQUIREMENTS:

Dimensions and configuration: See figure.

Nominal voltage: 300 volts.

Usual number and type of cells: 200 "FL-2" cells.

Usual cell connection: Series.

Terminals: 2-hole socket (pin jack).

Weight (maximum): 1 pound, 4 ounces.

(C) Capacity Tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be as specified in Supplement 1.

(C) First Article inspection:

Vibration test I.
Mechanical-shock test I.
Insulation-resistance test I.
Visual and mechanical (external and internal).
Battery voltage.
Waterproofing-of-jacket test.
Capacity, D (without storage).

(C) Quality conformance inspection:

Visual and mechanical (external).
Battery voltage.
Waterproofing-of-jacket test.
Vibration test I.
Mechanical-shock test I.
Capacity, D & T.

Source: https://assist.dla.mil -- Downloaded: 202610-15T16:53Z
Check the source to verify that this is the current version before use.

Methods of exmination and tests:

Capacity tests: See requirements for capacity specified herein.

Storage -	Test	Period
	D	9 months
	T	90 days

Discharge - The battery shall be discharged through 300,000 ohms for 12 hours per day, 5 days per week. This cycle shall be repeated continuously to a test-end voltage of 200.0 volts.

Custodians:

Army - ER
Navy - SH
Air Force - 99

(C)

Preparing activity:

Army - ER

Review activities:

User activities:

Army - ME
Navy - YD, MC

Project Number: (6135-0155-75)

Source: https://assist.dla.mil -- Downloaded: 202610-15T16:53Z
Check the source to verify that this is the current version before use.