
MIL-B-18/86D
21 May 1985
SUPERSEDING
MIL-B-18/86C
21 August 1976


MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-408/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

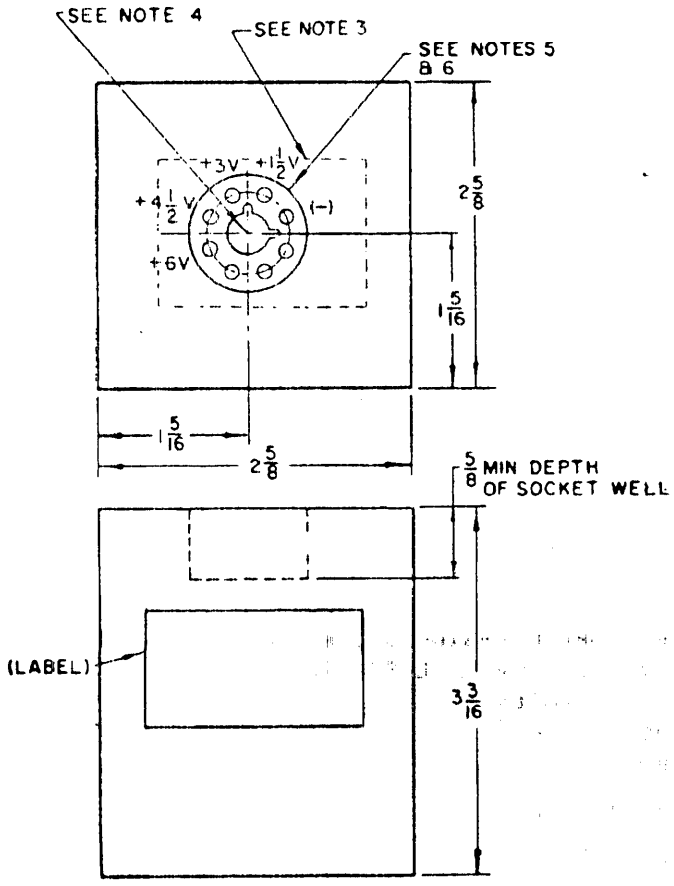

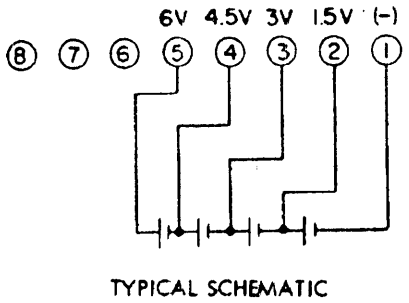

TYPICAL SCHEMATIC

INCHES	MM
1/16	1.59
5/8	15.88
1 1/16	26.99
1 5/16	33.34
2 5/8	66.68
3 3/16	80.96

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerance is ±1/16.

(D) denotes changes

FSC-6135

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:48Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -	Test	Period
	D	18 months
	T	90 days

Discharge - The battery shall be discharged through 40 ohms for 4 hours, then on open circuit for 20 hours. This cycle shall be repeated 5 days per week continuously to a test-end voltage of 3.6 volts.

Closed circuit voltage - Use TS-183( )/U test per special marking or, with minimum permissible voltage specified for TS-183( )/U, use a load resistance value of 34.88 ohms.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
8	5.40

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army - ER
Navy - SH
Air Force - 99

Preparing activity:
Army - ER

Review activities:
Army - MI

Project Number: (6135-0155-51)

User activities:
Army - ME
Navy - YD, MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:48Z
Check the source to verify that this is the current version before use.