
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC (TEMPERATURE COMPENSATING) (INSULATED), NON-ESTABLISHED RELIABILITY, STYLE CC36

INACTIVE FOR NEW DESIGN
AFTER DATE OF THIS SPECIFICATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-20.

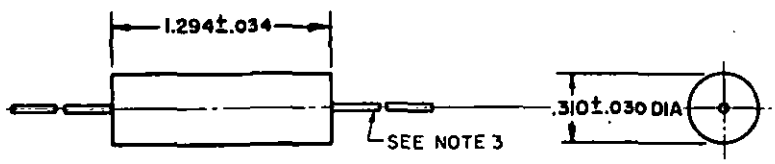

INCHES	MM
.030	.76
.034	.86
.310	7.87
1.294	32.87

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Leads shall be of tinned wire, .032±.002(.81±.05 mm) diameter and 1.250(31.75 mm) minimum length.

FIGURE 1. Style CC36 capacitors (insulated).

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Lead type: Axial.
DC rated voltage: 500 volts.
Operating temperature range: -55° to +125°C.
Characteristic: See table I.

Capacitance: Within tolerance specified (see table I).

Quality factor (Q): In accordance with MIL-C-20.

Dielectric withstanding voltage: In accordance with MIL-C-20.
Body insulation - Test I.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/6856

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:04Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.


Type designation [1]	Capacitance (pF)	Capacitance tolerance	Temperature coefficient shown as column head and tolerance envelope for temperature coefficient shown in column								
			A	C	H	L	P	R	S	T	U
CC36AH220-	22	GJK	H	.....	.....	.....	.....	.....	.....	.....	.....
CC36AH240-	24	GJ	H	.....	.....	.....	.....	.....	.....	.....	.....
CC36AH270-	27	FGJK	H	.....	.....	.....	.....	.....	.....	.....	.....
CC36AH300-	30	FGJ	H	.....	.....	.....	.....	.....	.....	.....	.....
CC36AH330-	33	FGJK	H	.....	.....	.....	.....	.....	.....	.....	.....
CC36AH360-	36	FGJ	H	.....	.....	.....	.....	.....	.....	.....	.....
CC36AH390-	39	FGJK	H	.....	.....	.....	.....	.....	.....	.....	.....
CC36-H430-	43	FGJ	H	H	H	.....	.....	.....	.....	.....	.....
CC36-H470-	47	FGJK	H	H	H	.....	.....	.....	.....	.....	.....
CC36—510-	51	FGJ	H	GH	G	G	.....	.....	.....	.....	.....
CC36—560-	56	FGJK	H	GH	G	G	G	.....	.....	.....	.....
CC36—620-	62	FGJ	H	GH	G	G	G	.....	.....	.....	.....
CC36—680-	68	FGJK	H	GH	G	G	G	H	.....	.....	.....
CC36—750-	75	FGJ	.....	GH	G	G	G	H	H	.....	.....
CC36—820-	82	FGJK	.....	GH	G	G	G	H	H	.....	.....
CC36—910-	91	FGJ	.....	GH	G	G	G	H	H	H	.....
CC36—101-	100	FGJK	.....	GH	G	G	G	H	H	H	.....
CC36—111-	110	FGJ	.....	GH	G	G	G	H	H	H	.....
CC36—121-	120	FGJK	.....	GH	G	G	G	H	H	H	.....
CC36—131-	130	FGJ	.....	GH	G	G	G	H	H	H	J
CC36—151-	150	FGJK	.....	GH	G	G	G	H	H	H	J
CC36—161-	160	FGJ	.....	GH	G	G	G	H	H	H	J
CC36—181-	180	FGJK	.....	.....	.....	G	G	H	H	H	J
CC36—201-	200	FGJ	.....	.....	.....	.....	G	H	H	H	J
CC36—221-	220	FGJK	.....	.....	.....	.....	.....	H	H	H	J
CC36—241-	240	FGJ	.....	.....	.....	.....	.....	.....	H	H	J
CC36—271-	270	FGJK	.....	.....	.....	.....	.....	.....	.....	H	J
CC36UJ301-	300	FGJ	.....	.....	.....	.....	.....	.....	.....	.....	J
CC36UJ331-	330	FGJK	.....	.....	.....	.....	.....	.....	.....	.....	J
CC36UJ361-	360	FGJ	.....	.....	.....	.....	.....	.....	.....	.....	J

[1] Complete type designation will include letter symbols to indicate capacitance tolerance, and where applicable, temperature coefficient, and tolerance envelope for temperature coefficient.

Life: In accordance with MIL-C-20, operating condition 1.

Marking:
Method I - In accordance with MIL-C-20, except for "JAN" brand. The beginning of the type designation shall be adjacent to the end having the inner-electrode terminal.
Method II - In accordance with MIL-C-20 and as shown on figure 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:04Z
Check the source to verify that this is the current version before use.

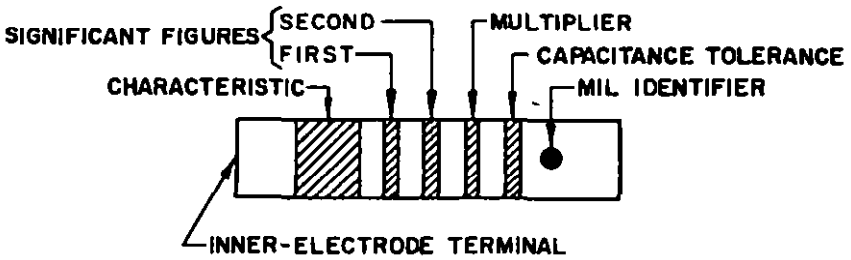

1. The characteristic, capacitance, and capacitance tolerance shall be indicated on the capacitor by five bands of color. The characteristic band shall be adjacent to the inner-electrode terminal; the width shall be at least twice that of any other band, or the space from the characteristic band to the adjacent end of the capacitor body shall be no larger than one-third the space from the capacitance-tolerance band to the opposite end of the capacitor body.

2. The MIL identifier (black spot) shall be applied to the capacitor body adjacent to the capacitance-tolerance band.

FIGURE 2. Color-code marking.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - OS
Air Force - 80
DSA - ES

User activities:
Army -
Navy - AS, SH, MC
Air Force -

Preparing activity:
Air Force - 11

Agent:
DSA - ES

(Project 5910-1064-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:04Z
Check the source to verify that this is the current version before use.