
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC
(TEMPERATURE COMPENSATING),
ESTABLISHED AND NON-ESTABLISHED RELIABILITY,
STYLES CCR81 and CC81

This amendment forms a part of Military Specification Sheet MIL-C-20/32, dated 25 May 1973, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

* FIGURE 1, delete and substitute:

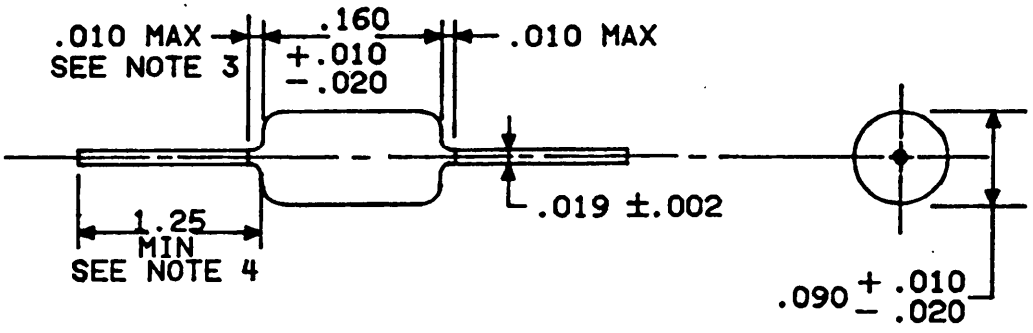



CIRCUIT DIAGRAM

INCHES	MM
.002	.05
.010	.25
.019	.48
.020	.51
.090	2.29
.160	4.06
1.25	31.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Nonconductive material shall not extend more than .010 inch (.25 mm) beyond the ends of the capacitor body.
4. Lead length may be a minimum of 1.00 inch (25.4 mm) long for use in tape and reel packaging, when specified in the ordering data.

FIGURE 1. Style CCR81 and CC81 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:06Z
Check the source to verify that this is the current version before use.

Marking, line 2, delete and substitute: "JCH - 'J' brand (ER only) (J); and characteristic (CH).".

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - OS
Air Force - 85
DLA - ES

User activities:
Army -
Navy - AS, SH, MC
Air Force -

Preparing activity:
Air Force - 11

Agent:
DLA - ES

(Project 5910-1355-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:06Z
Check the source to verify that this is the current version before use.